



MATING PLUG




SPECIFICATIONS:

1. RATING: 24V, 5.0A
2. CONTACT RESISTANCE: 30 m Max.
3. INSULATION RESISTANCE: 100MΩ Min. (DC500V)
4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC;
5. INSERTION AND EATRACTION FORCE : 0.3-3.0Kg .
6. LIFE TEST: 5,000 CYCLES.
6. TERMINAL STRENGTH:ANY DIRECTION FOR 10 SECONDS 500gf.
7. OPERATING TEMPERATURE: -25°C~+85°C.
8. WAVE SOLDERING:260±5°C, TIME 5±5 SECONDS.
9. PART MUST COMPLY ROHS SPECIFICATION.

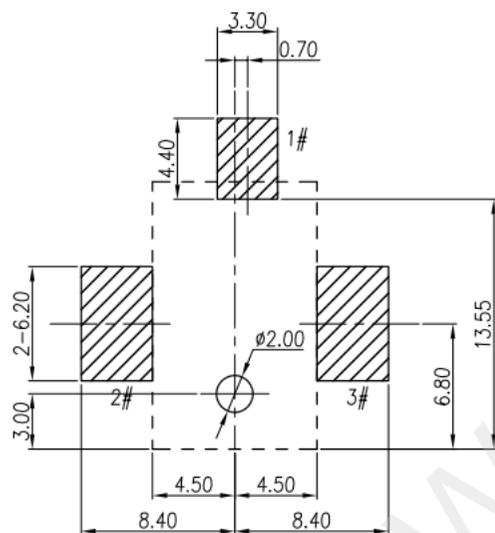

RECOMMENDED PCB LAYOUT T=1.60mm  
GENERAL TOLERANCE:0.05mm  
TOP VIEW

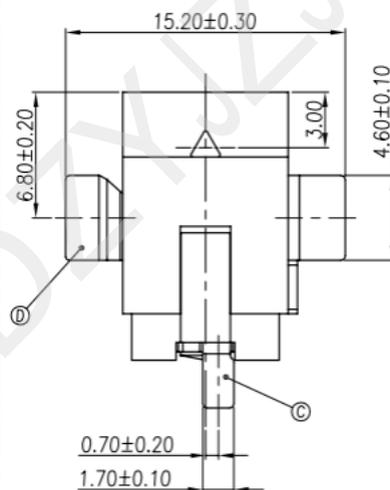

F	COVER	1	PA10T	BLACK
E	TERMINAL 3#	1	BRASS	Silver
D	TERMINAL 2#	1	COPPER ALLOY	Silver
C	TERMINAL 1#	1	BRASS	Silver
B	CENTER PIN	1	COPPER	Nicker
A	HOUSING	1	PA10T	BLACK
NO.	DESCRIPTION	QT'Y	MATERIAL	PLATING & COLOR



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-088A 单定位柱	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC088A-200	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2603031646	SHEET NO. 1 OF 1