




回路图

行程 Travels
 4.3mm (行程: 0.7±0.2mm)
 5.0mm (行程: 1.3±0.3mm)

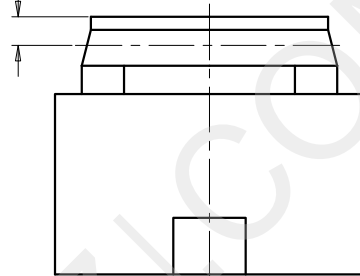

规格 Specifications

额定负荷 Rating	DC 12V/50mA
接触电阻 Contact Resistance	100mΩ max.
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.
抗电强度 Dielectric strength	AC250V (50~60HZ) 60S min.
操作力 Operation force	250±60gf
寿命试验 Operating Life	80,000cycles
行程 Travels	看左侧编码说明

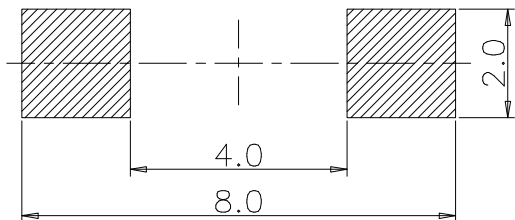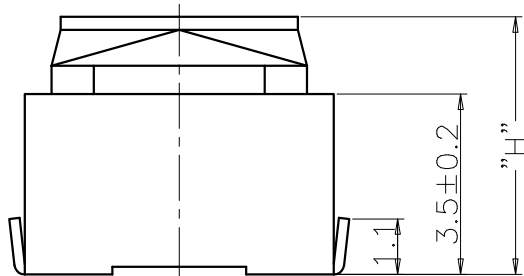

安装尺寸图

H
4.3
5.0



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 6X6 无声开关	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HXC02-S66XXK	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HXC-2603121013	SHEET NO. 1 OF 1