


PCB板安装孔图

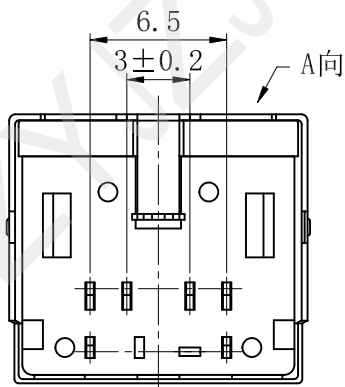

主要技术特性要求:

1. 使用温度范围:
环境温度: -25~+70°C
相对湿度: 95% (40°C)
2. 额定负荷: 2A 12V DC
3. 接触电阻: ≤30mΩ
4. 绝缘电阻: ≥100MΩ
5. 耐压: 250V AC (50Hz) 1min
6. 插拔力: 5~50N
7. 寿命: ≥5000次

10	后盖	1	不锈钢0.2mm	清洗			
9	铜前盖	1	黄铜0.28mm	D. Cu/Sn			
8	右中针	1	黄铜0.35mm	D. Cu/Sn			
7	左中针	1	黄铜0.35mm	D. Cu/Sn			
6	右长针	1	黄铜0.35mm	D. Cu/Sn			
5	左长针	1	黄铜0.35mm	D. Cu/Sn			
4	右短针	1	黄铜0.35mm	D. Cu/Sn			
3	左短针	1	黄铜0.35mm	D. Cu/Sn			
2	盖子	1	PBT				
1	底座	1	PBT				
序号	名称	数量	材料	处理	单件质量	总计质量	备注



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: S端子	
	CHECKED BY : 马跃	DATE : 2014-02-23	PART NO. HYC-MDC-603	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY : 柯南	DATE : 2014-02-23	DRAW NO: HYC-2003191854	SHEET NO. 1 OF 1