



性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP
- 接触点(材质): 磷铜, 镀金

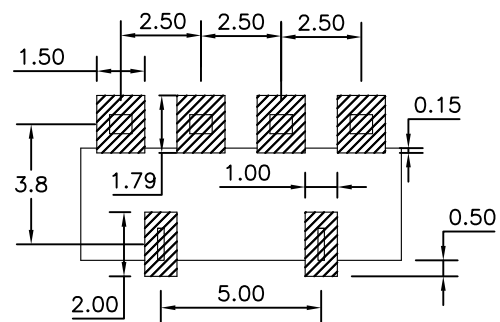

RECOMMENDED PCB LAYOUT  
TOP VIEW (.XX±0.05)

PART NO.	DIM A	DIM B	DIM C
HYC-BB4P2554	5.4	3.8	4.4
HYC-BB4P2560	6.0	4.4	5.0
HYC-BB4P2565	6.5	4.9	5.5
HYC-BB4P2570	7.0	5.4	6.0
HYC-BB4P2575	7.5	5.9	6.5
HYC-BB4P2580	8.0	6.4	7.0

 <b>深圳市华宇创精密电子有限公司</b>				
<b>TOLERANCE:</b> X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	<b>DRAWN BY :</b> 陈一鸣	<b>DATE :</b> 2014-02-23	<b>PART NAME:</b> 2.5PH 4P 侧压电池座	
	<b>CHECKED BY:</b> 马跃	<b>DATE :</b> 2014-02-23	<b>PART NO.</b> SEE TABLE	<b>MOLD NO.</b> 
<b>UNIT:</b> mm [inch] <b>SCALE:</b> 1:1 <b>SIZE:</b> A4	<b>APPROVED BY:</b> 邱敏	<b>DATE :</b> 2014-02-23	<b>DRAW NO:</b> HYC-2604101507	<b>SHEET NO.</b> 1 OF 1