


Pin数	PART NO.	DIM A	DIM B
2P	HYC-BP2P4040DT-51	7.7	5.11
3P	HYC-BA3P4040DT-91	11.7	9.11
4P	HYC-BA4P4040DT-131	15.7	13.11
5P	HYC-BA5P4040DT-171	19.7	17.11
6P	HYC-BA6P4040DT-211	23.7	21.11

性能:

- 额定电流: 3A
- 额定电压: 30V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -55℃~+125℃
- 塑件(材质): PA9T
- 接触点(材质): 磷铜, 镀金5U

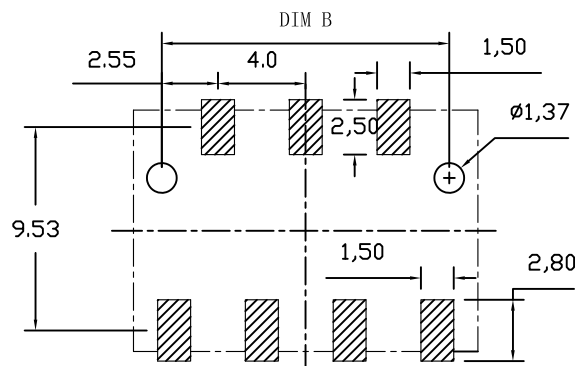

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 4.0PH 4.0H 弹片电池座 公座有柱	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. SEE TABLE	MOLD NO. /
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2604141042	SHEET NO. 1 OF 1