
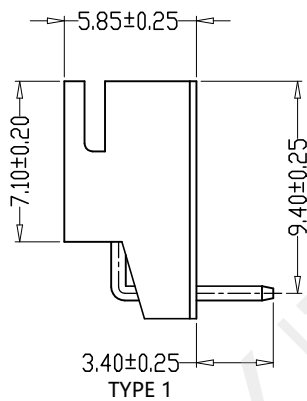



2AWD

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material:Wafer PA66/PA46, UL94V-0
PIN Brass Tin-plated

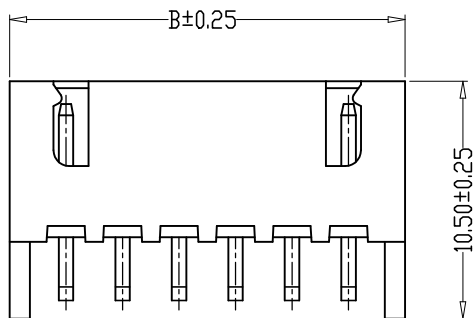


TYPE 1



TYPE 2

PIN	尺寸 (mm)		
	A	B	C
02AWD	2.50	7.50	6.10
03AWD	5.00	10.00	8.60
04AWD	7.50	12.50	11.10
05AWD	10.00	15.00	13.60
06AWD	12.50	17.50	16.10
07AWD	15.00	20.00	18.60
08AWD	17.50	22.50	21.10
09AWD	20.00	25.00	23.60
10AWD	22.50	27.50	26.10
11AWD	25.00	30.00	28.60
12AWD	27.50	32.50	31.10
13AWD	30.00	35.00	33.60
14AWD	32.50	37.50	36.10
15AWD	35.00	40.00	38.60
16AWD	37.50	42.50	41.10
17AWD	40.00	45.00	43.60
18AWD	42.50	47.50	46.10
19AWD	45.00	50.00	48.60
20AWD	47.50	52.50	51.10

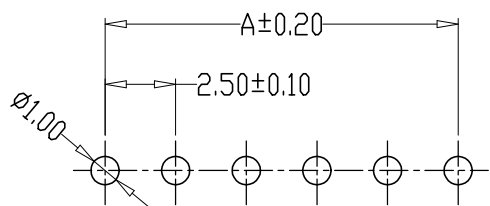

PCB LAYOUT



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: TJC3定位弯针
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC70-NAWD-250-X
UNIT: mm [inch]	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HYC-2604161158
SCALE: 1:1 SIZE: A4			SHEET NO. 1 OF 1