

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 52A
2. Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	6KV
Rate voltage(V)	600V
Rate current(A)	57A




NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 10.16mm, Poles : N=02~08P
3. Operating temperature: -40°C~+105°C
4. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				- / /	
To	Over	To	Over	To	Over	0.1/10	
6	10	10	30	60	100	150	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2'

5. RoHS Compliance

3	Nut	SPCC	Zn Plated
2	Pin header	Copper alloy	Au Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

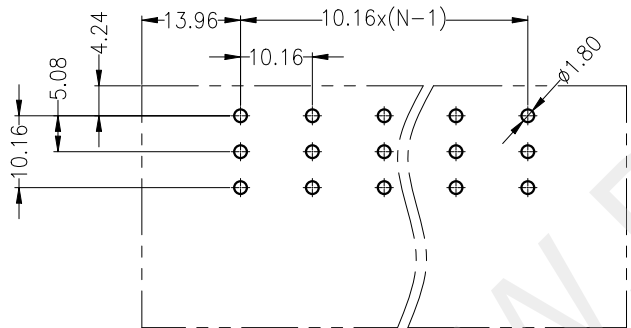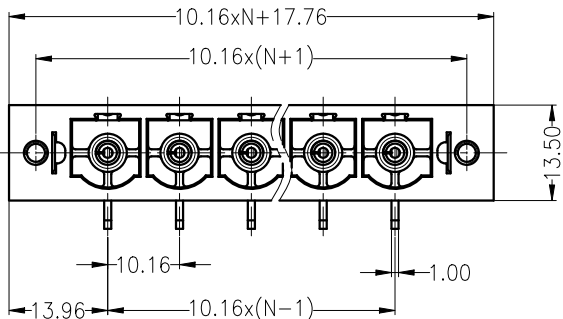

PCB LAYOUT



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 插拔式接线端子 10.16PH 弯针带耳
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC213-JXD3XN-1016
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2604170950
			SHEET NO. 1 OF 1