



主要技术性能	
额定电负荷	DC 30V 0.5A
接触电阻	≤0.03 Ω
绝缘电阻	≥100MΩ
耐压	AC500V(50Hz)/min
插拔力	3-30N
使用温度范围	-30-70℃
使用寿命	5000次

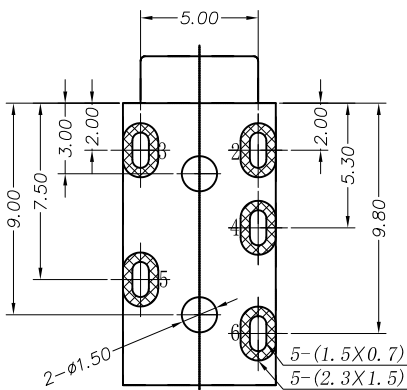

P. C. B LAYOUT TOP VIEW

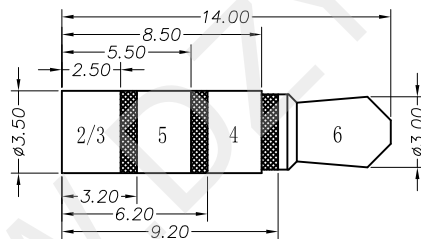

6	PJ-327F-06	弹片	1	磷铜	0.2T	镀锡
5	PJ-327F-05	大脚	1	磷铜	0.2T	镀锡
4	PJ-327F-04	中脚	1	磷铜	0.2T	镀锡
3	PJ-327F-03	右脚	1	磷铜	0.2T	镀锡
2	PJ-327F-02	左脚	1	磷铜	0.2T	镀锡
1	PJ-327F-01	基座	1	PPA		黑色
序号	产品编号	产品名称	数量	材料	规格	处理



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PJ-327F 插件
	CHECKED BY : 马跃	DATE : 2014-02-23	PART NO. : HYC-PJ327F-140
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY : 邱敏	DATE : 2014-02-23	DRAW NO. : HYC-2604281642
			SHEET NO. : 1 OF 1