

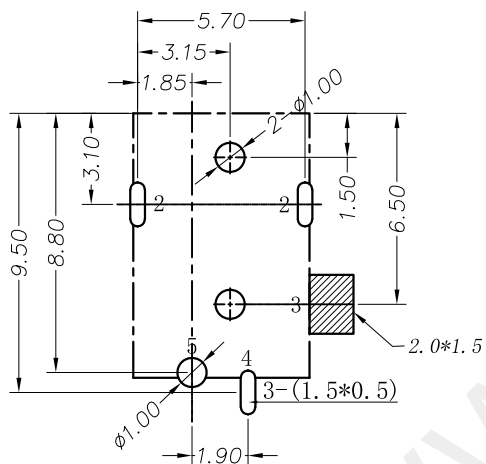


主要技术性能	
额定电负荷	DC 30V\1A
接触电阻	≤0.03Ω
绝缘电阻	≥100MΩ
耐压	AC500V (50Hz)/min
插拔力	3-30N
使用温度范围	-30-70℃
使用寿命	5000次



P. C. B LAYOUT TOP VIEW



SCHEMATIC

5	DC-056-05	圆针	1	黄铜		镀银
4	DC-056-04	插片	1	黄铜	0.25T	镀金
3	DC-056-03	弹片	1	锰钢	0.20T	镀金
2	DC-056-02	盖脚	1	黄铜	0.25T	镀银
1	DC-056-01	基座	1	PPA(黑色)		
序号	产品编号	产品名称	数量	材料	规格	电镀



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-056D
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-DC056D-065
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO. _____ DRAW NO: HYC-2605150929
			SHEET NO. 1 OF 1