



主要技术特性要求:


- 使用条件:
环境温度: -25~70°C
相对湿度: 90% (40°C)
- 额定负荷: 50V 6A
- 接触电阻: ≤0.03Ω
- 绝缘电阻: ≥100MΩ
- 耐压: AC1500V (50Hz) 1min
- 插拔力: 10~50N
- 寿命: 5000次

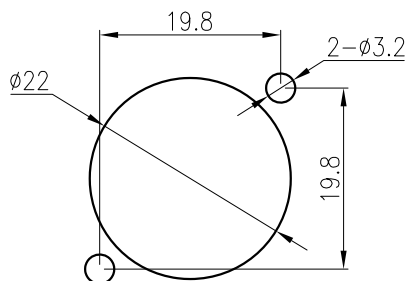

Panel cut out (rear side)

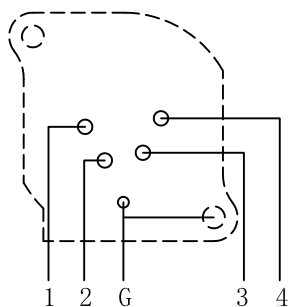

Electrical schematic

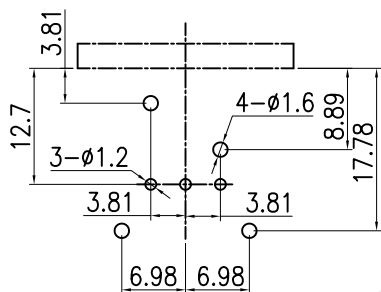

P.C.B LAYOUT (TOP VIEW)
Tolerance: ±0.05

序号	零件料号	名称	材料	数量	镀层/颜色	备注
⑧		平铜片	黄铜	1	镀锡	共用CT3-05平铜片
⑦		接地脚	黄铜	1	镀锡	共用CT5-03接地脚
⑥		4#针	HPb59	1	镀金	共用1#针
⑤		3#针	HPb59	1	镀金	共用2#针
④		2#针	HPb59	1	镀金	
③		1#针	HPb59	1	镀金	
②		面盖	尼龙	1	镀镍	共用CT5-03面盖
①		基座	PA66	1	黑色	



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: CT4-03W
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC-CT4-03W
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2605281539
			SHEET NO. 1 OF 1