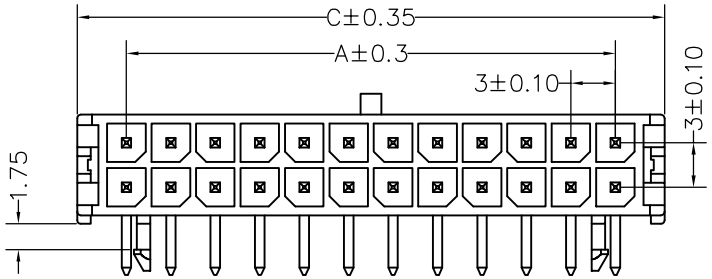

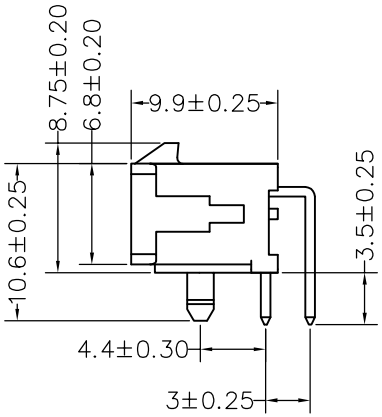

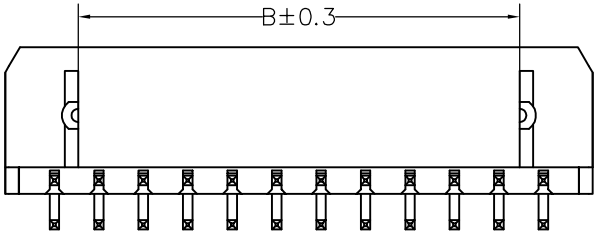



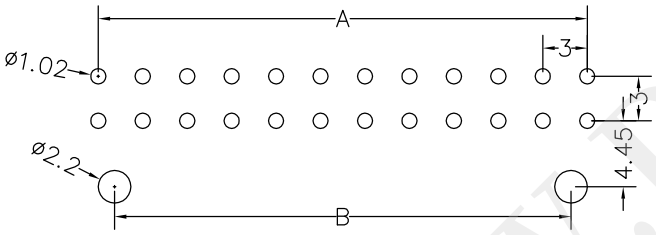

P. C. B LAYOUT



Dimensional Information:

Poles	Part NO.	Dimensions mm		
		A	B	C
2	2X1P		1.15	6.7
4	2X2P	3.0	1.15	9.7
6	2X3P	6.0	1.15	12.7
8	2X4P	9.0	5.8	15.7
10	2X5P	12.0	8.8	18.7
12	2X6P	15.0	11.8	21.7
14	2X7P	18.0	14.8	24.7
16	2X8P	21.0	17.8	27.7
18	2X9P	24.0	20.8	30.7
20	2X10P	27.0	23.8	33.7
22	2X11P	30.0	26.8	36.7
24	2X12P	33.0	29.8	39.7

SPECIFICATIONS

1. 极数 Poles: 2X1P/2X12P
2. 额定电流 Current rating: 5.0A AC,DC
3. 额定电压 Voltage rating: 250V AC,DC
4. 温度范围 Temperature range: -40°C to +105°C
5. 接触电阻 Contact resistance: ≤20mΩ
6. 绝缘电阻 Insulation resistance: ≥1000mΩ
7. 耐电压 Withstand voltage: 1500V AC/minute
8. 适用线规 Applicable wire: AWG #18 to #26
9. 适用基板厚度 Applicable PC board thickness: 0.8mm to2.0mm
10. 材质 The material: Base: PA10T-UL94-V0 HF
    Pin针: Brass (C2680)
11. 表面处理 (Surface treatment): PIN针/SOLDER镀镍20μ"-50μ": 镀亮锡80μ"-120μ".
    Ni ckeled more than 20μ"-50μ",Bright tin plating 80-120μ".

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: C3004 双排弯针
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO. HYC60-2XNAW-300
			MOLD NO.
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE: 2014-02-23	DRAW NO: HYC-2606251158
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM