


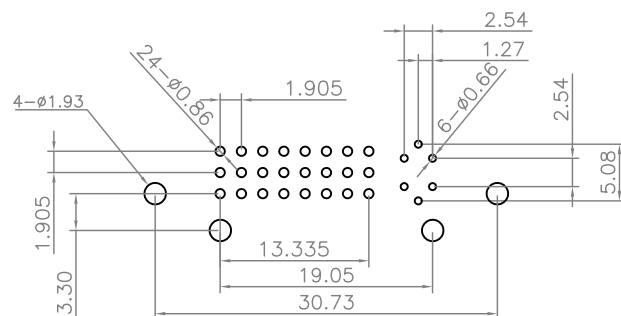
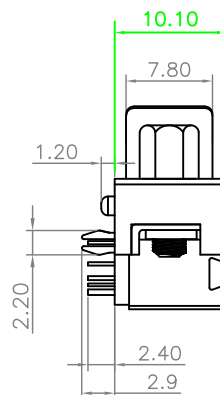
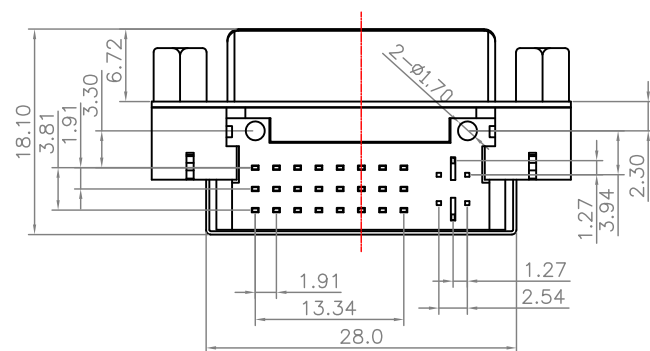


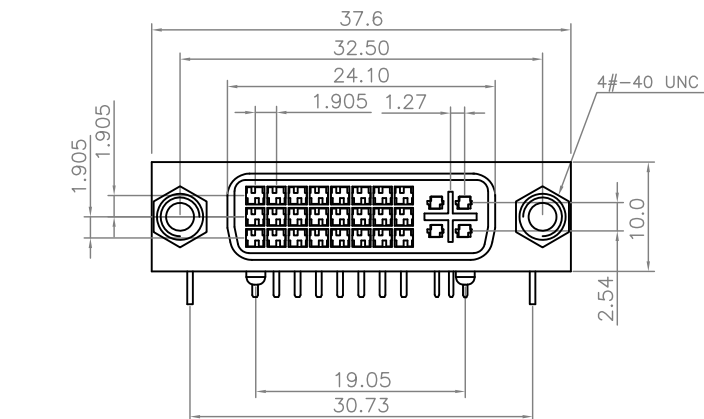

RECOMENDED PCB LAYOUT, THICKNESS=1.60mm
(DEFAULT TOLERANCE:±0.05)



SCREW



NOTE:

1. 材质及电镀:

主体:PBT UL 94V-0

后盖:PA66 UL 94V-0

端子: 黄铜, G/F金,

50u镍, 80u锡

铁壳:SPCC T=0.40

铁壳电镀:镀镍50u"

鱼叉:SPCC, 镀锡80u"

铆钉:铜, 电镀镍50u"

2. 电器特性:

绝缘电阻: 1000 MEGOHMS MIN

耐电压: 500V AC/一分钟

端子接触阻抗: 30MILIOHMS MAX

额定电流: 1.5AMPERES MIN

3. 环境性能

温度范围: -20° C TO 85° C



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DVI 24+5 带屏蔽壳铆锁
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC21-DVI29-376
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-DVI18022611
			SHEET NO. 1 OF 1