
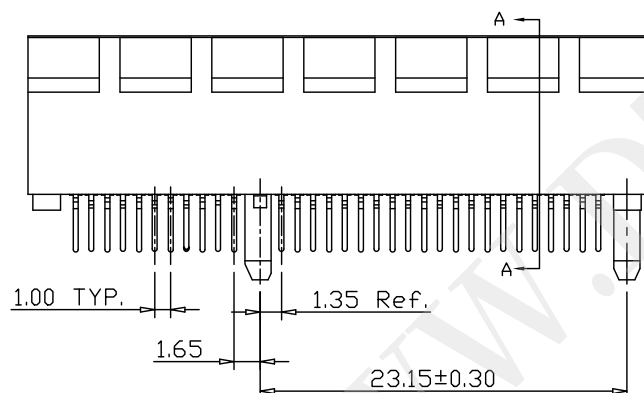
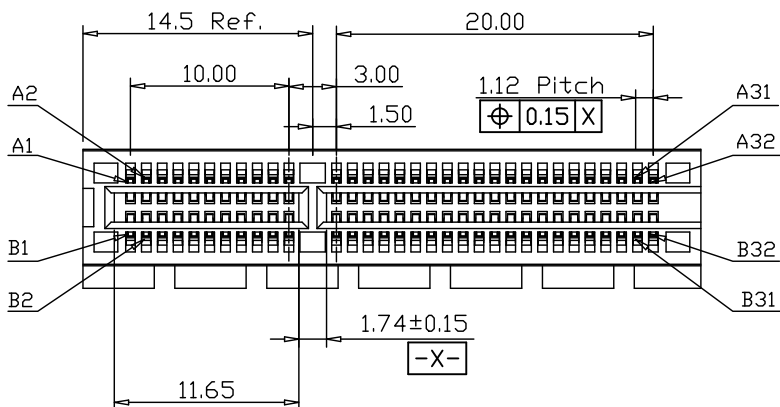
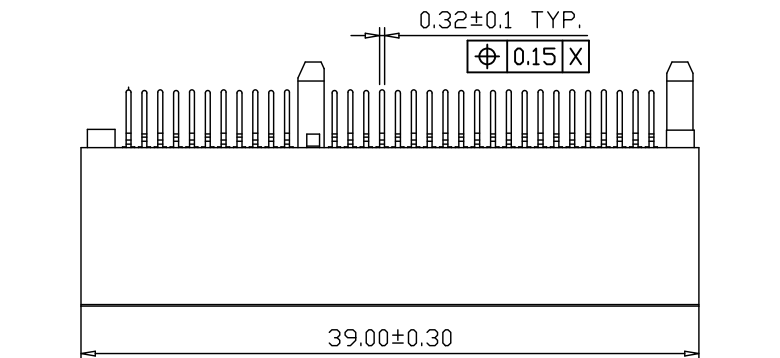


SECTION A-A



*Material:

- 1.Housing: HIGHTEMP PLASTIC,UL 94V-0, Color:Black;
- 2.Terminal: Copper Alloy(C7025),T=0.25mm;
Plating: Gold in contact area;
80u" Min Tin in solder area;
30u" MIN.NICKEL UNDERPLATING OVER ALL.

*Electrical Characteristics:

- 1:Contact Resistance: $30m\Omega$ Max.
- 2:Insulation Resistance: $1000M\Omega$ Min.
- 3:Dielectric Strength: 500V DC/1MIN.
- 4:Contact Current rating: 1.1 A Per Pin Min.





*Mechanical Characteristics:

- 1:Insertion Force: 1.15N per contact pair Max.
- 2:Extraction Force: 0.15N per contact pair Min.
- 3:Durability rating: 50 Cycles

*TEMPERATURE RANGE $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PCI-E 64P 无肋开口导柱式
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC61-PCI64-390
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2607081643
			SHEET NO. 1 OF 1

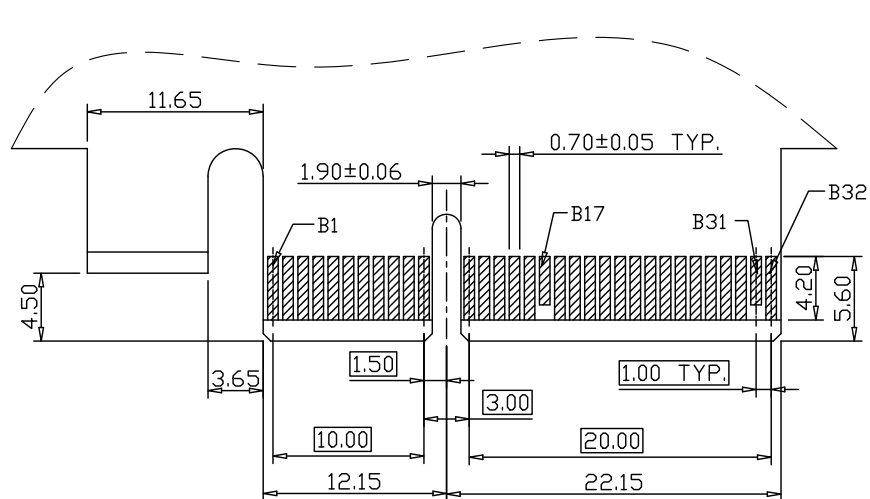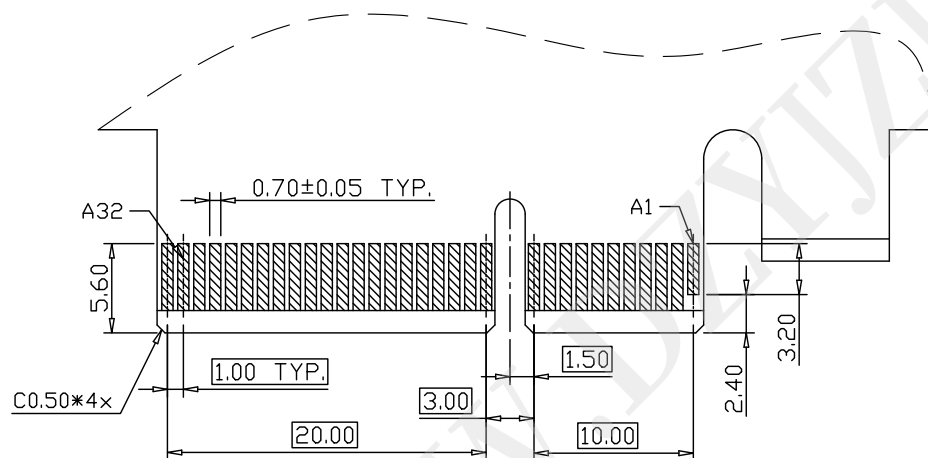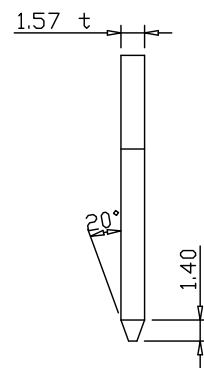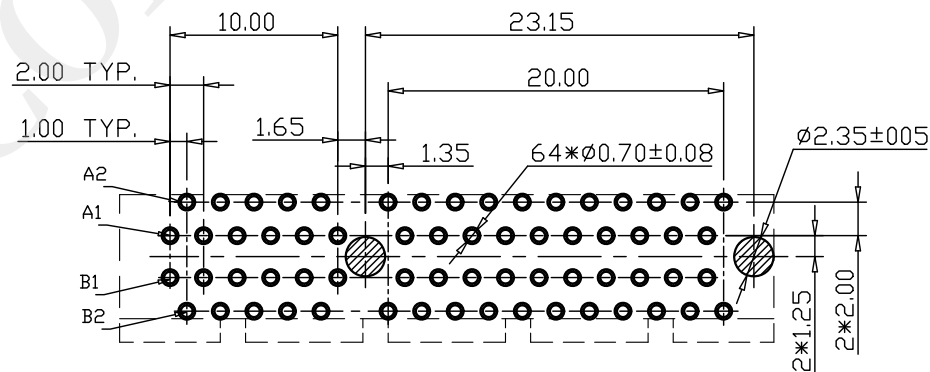RECOMMENDED EDGE CARD
PATTERN(PRIMARY SIDE)RECOMMENDED EDGE CARD
PATTERN(SECONDARY SIDE)RECOMMENDED PCB LAYOUT(COMPONENT SIDE)
TOLERANCE: ±0.05

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5"

UNIT: mm [inch]

SCALE:1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY :

马跃

DATE :

2014-02-23

APPROVED BY :

邱敏

DATE :

2014-02-23

PART NAME:

PCI-E 64P 无肋开口导柱式

PART NO.

HYC61-PCI64-390

MOLD NO.

DRAW NO:

HYC-2607081643

SHEET NO.

1 OF 1