




3D VIEW

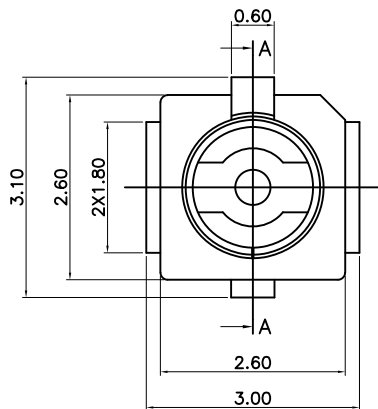

SECTION: A-A





NOTES:

- 1.1 Current Rating (额定电流): 1.0A
1.2 Voltage Rating (额定电压): 60V DC /AC
1.3 Insulation Resistance (绝缘阻抗): 500MΩ Min
1.4 Nominal Characteristic Impedance (特性阻抗): 50Ω
1.5 Dielectric Withstanding Voltage (耐电压) 200V AC 1 Minute
1.6 Contact Resistance (接触电阻): 20mΩ Max
1.7 Durability (耐久性): ≥ 100 Cycles
1.8 VSWR (驻波比): 1.3max(DC~3 G) 1.4 max(3~6 G) 1.5 max(6~8 G)
2.0 Material:

Housing (胶芯): LCP,UL94V-0,White

Contact (信号端子): Copper Alloy, Au Plated over Ni;

Shell (接地外壳): Copper Alloy,Au Plated over Ni;

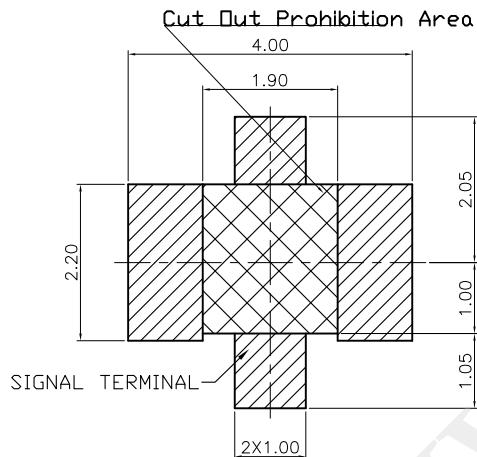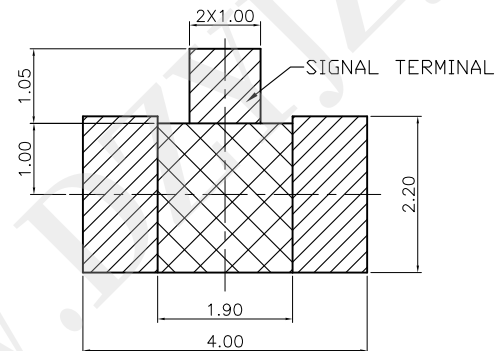RECOMMENDED P.C.B. LAYOUT
FOR 4 PAD
(TOLERANCE ±0.05)RECOMMENDED P.C.B. LAYOUT
FOR 3 PAD
(TOLERANCE ±0.05)

3	CONTACT	1 PCS	COPPER ALLOY	Au&Ni Plated
2	MOLDING HOUSING	1 PCS	HIGH TEMPERATURE PLASTIC	None
1	SHELL	1 PCS	COPPER ALLOY	Au&Ni Plated
NO.	DESCRIPTION	QTY.	MATERIAL	FINISHFD



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: RF一代板端天线座	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC30-RF3031-125
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2607201544
			SHEET NO.	1 OF 1