





- (1): Rated Voltage: 60 V AC .;
- (2): Contact Resistance: 20mOHM Max.;
- (3): Dielectric Withstanding Voltage: 100V AC For 1 Minute;
- (4): Insulation Resistance: 1000M OHM Min.;
- (5): Frequency Range: DC up to 6GHz
VSWR: 1.3 max. at 0~3GHz;
VSWR: 1.4 max. at 3~6GHz;
- (6): Operating Temperature: -40℃ to +90℃
- (7): Durability: 30 cycles
- (8): REC Connector shall stand IR reflow twice
- (9): ▼ As the focus control size

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	SHELL	1	COPPER ALLOY	Au plated over Ni
2	Housing	1	High Temp. Plastic	Black UL94V-0
3	CONTACT	1	COPPER ALLOY	Au plated over Ni

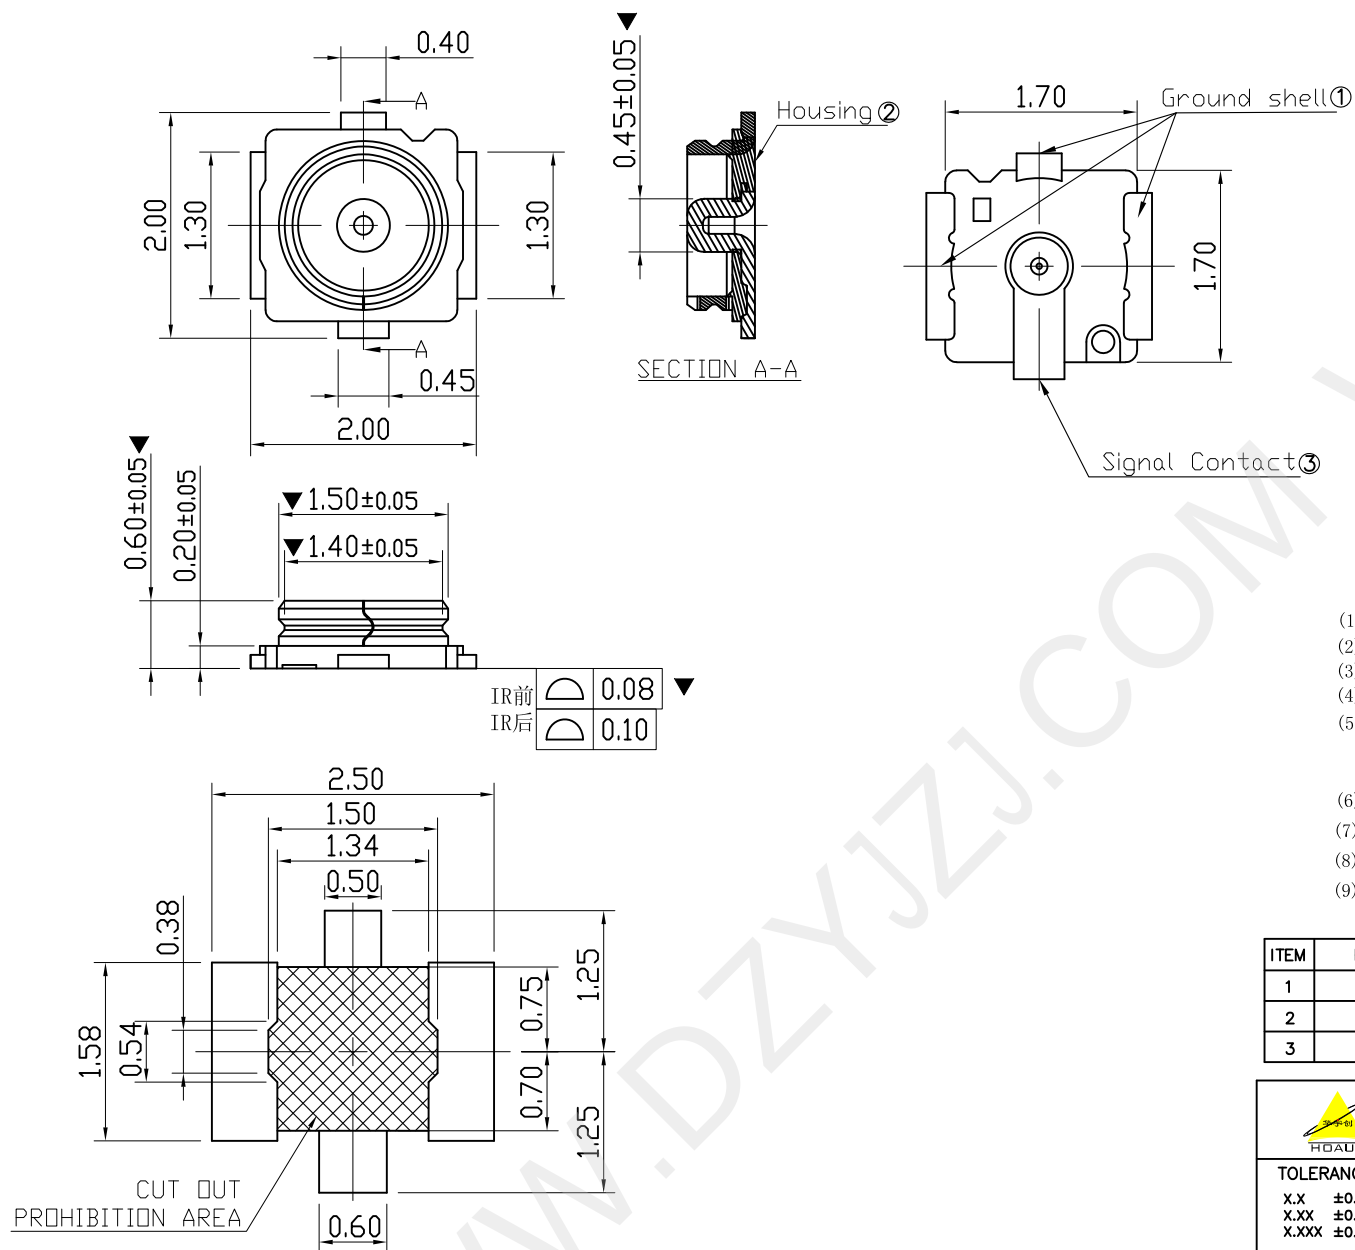

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X' ±0.5'		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: RF四代板端天线座	
 UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC31-RF2020-060
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-2607201550
SCALE:1:1	SIZE: A4			SHEET NO.	1 OF 1