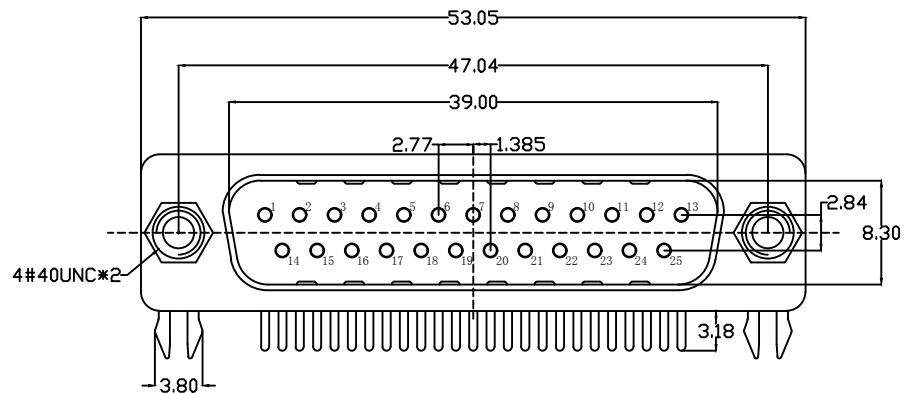


螺丝规格			
零件编号	X尺寸	L尺寸	内牙
A/C/E	4.8	7.0	4#40
B/D/F	5.8	7.0	4#40
G	4.8	10.2	4#40
H/I	4.8	8.2	4#40

说明:

1. 特性:

额定电压 :250V AC最大值

额定电流 :最大3A

接触阻抗 :30mΩ MAX.

绝缘阻抗 :3000MΩ MIN. at 500V DC

耐电压值 :250V AC RMS for 1Minute

工作温度 : -45℃~+85℃

2. 材料:

胶 芯 : PBT rated/PA9T rated

端 子 : 铜合金

外 壳 : SPCC或铜合金或不锈钢

镀镍或钝化处理

鱼 叉 : SPCC或铜合金, 镀锡

螺 丝 : 铁棒或铜合金, 镀镍



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.* ±0.5*	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DR25 公座直锁
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC76-VGA25A-530
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2607241903
			SHEET NO. 1 OF 1