

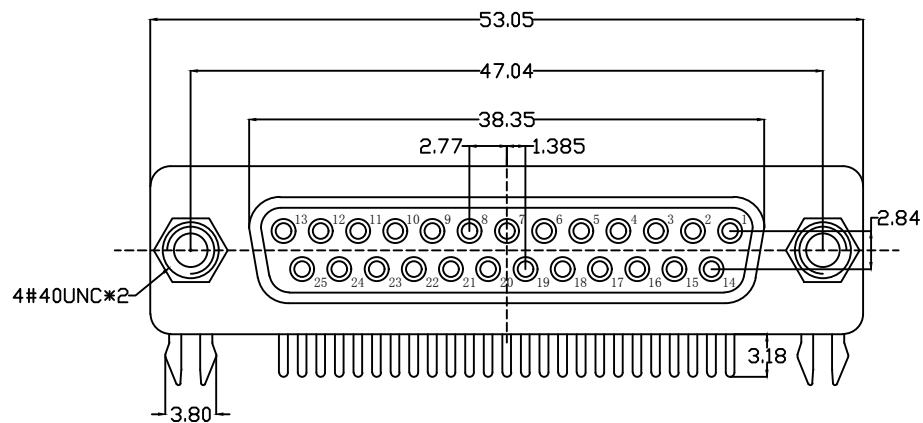


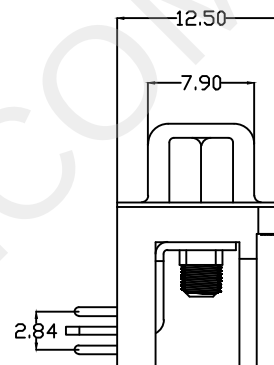

螺丝规格

零件编号	X尺寸	L尺寸	内牙
A/C	4.8	7.0	4#40
B/D	5.8	7.0	4#40

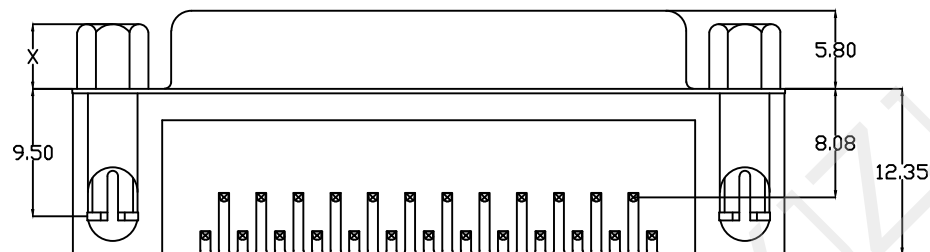

说明:

1. 特性:

额定电压 : 250V AC最大值

额定电流 : 最大3A

接触阻抗 : 30mΩ MAX.

绝缘阻抗 : 3000MΩ MIN. at 500V DC

耐电压值 : 250V AC RMS for 1Minute

工作温度 : -45℃~+85℃

2. 材料:



胶 芯 : PBT rated

端 子 : 铜合金

外 壳 : SPCC或铜合金, 镀镍

鱼 叉 : SPCC或铜合金, 镀锡

螺 丝 : 铁棒或铜合金, 镀镍

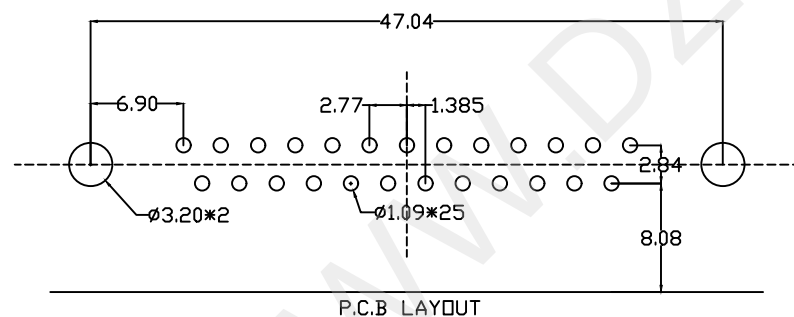

传统型端子



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DR25 母座直锁
UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC198-VGA25B-530
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2607241907
			SHEET NO. 1 OF 1