
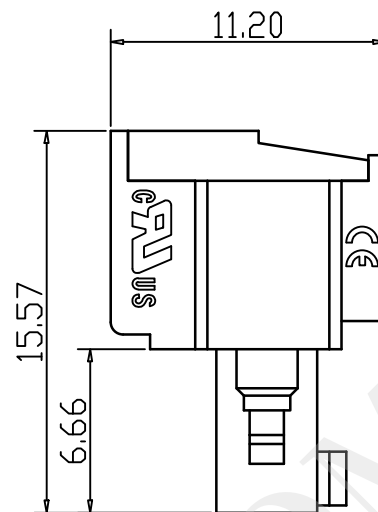
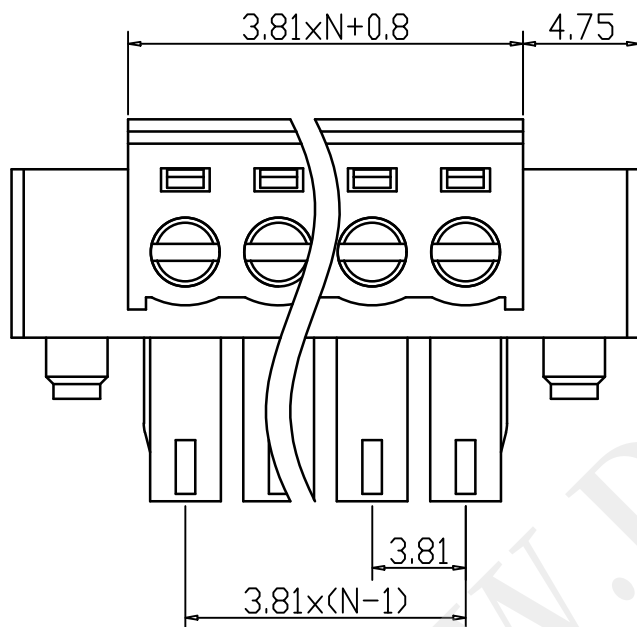


UL/CUL 技术参数				
UL/CUL Technical Data				
等 级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	10
接线范围	Wire Range	26-16		
单/多芯线	Solid/Stranded [AWG]			
耐压	Withstanding Voltage	AC1600V/1Min		
IEC 技术参数				
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	-	160	320
额定电流	Rated Current [A]	-	7	7
额定冲击电压	Impulse withstand voltagea [KV]	-	2.5	2.5
导线截面积	Conductor cross section	1.5		
硬质/柔性导线	Solid/ flexible [mm²]			
材 料				
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contactor Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀镍 Ni Plated		
一般参数 Other Data				
间距 Pitch	[mm]	3.81		
极数 Poles	[P]	2-24		
剥线长度 Stripping Length	[mm]	7-8		
螺丝 Screw/ 扭矩 Torque(Max)	[N.m]	M2.0/0.2		
工作温度 Operating temperatur	[°C]	-40~+105		
引针尺寸 Pin Dimensions	[mm]	-		
PCB板孔径 PCB Hole Diameter	[mm]	-		

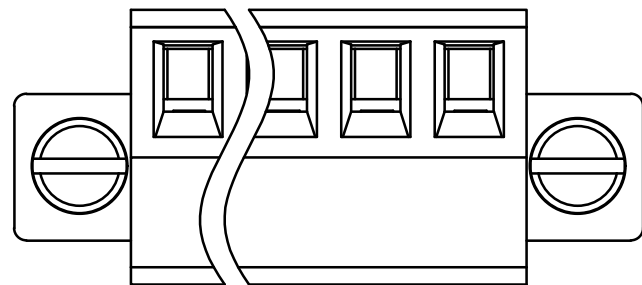

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X.* ±2* X.X* ±0.5*



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NAME:

插拔式接线端子 3.81PH 带螺丝 弯头

PART NO.

HYC217-JDX-381

MOLD NO.

DRAW NO:

HYC-2607201742

SHEET NO.

1 OF 1