

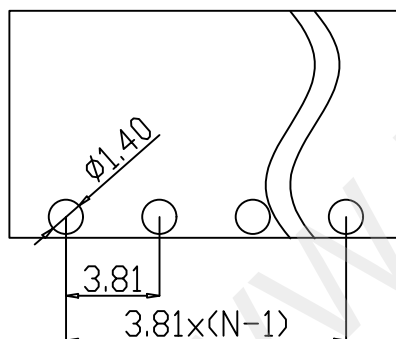
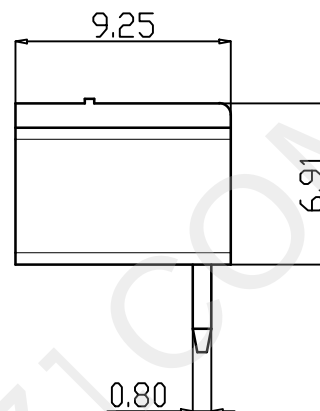
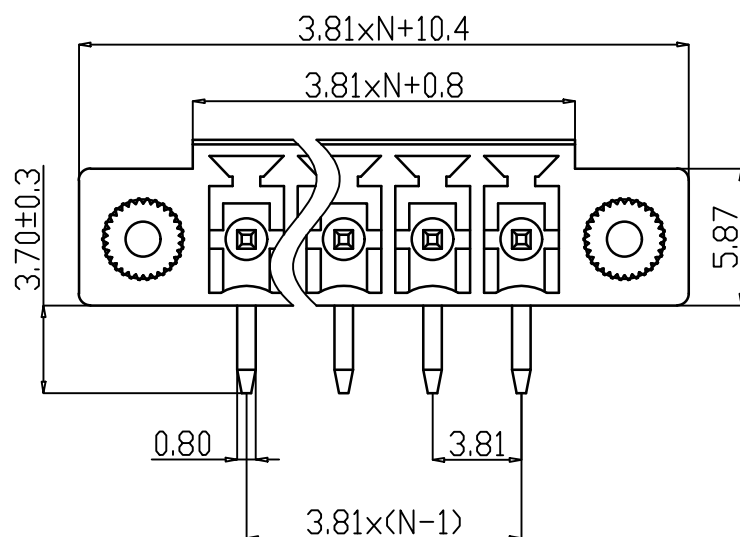




PCB LAYOUT

UL/CUL 技术 参数		UL/CUL Technical Data		
等 级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	10
接线范围	Wire Range	-		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	AC1600V/1Min		
IEC 技术参数				
IEC Technical Data				
过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	-	160	320
额定电流	Rated Current [A]	-	7	7
额定冲击电压	Impulse withstand voltagea [KV]	-	2.5	2.5
导线截面积	Conductor cross section	-		
硬质/柔性导线	Solid/ flexible [mm ²]			
材 料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflammability	UL94V-0		
导体材料	Contact Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀锡 Tin Plated		
一般参数 Other Data				
间距 Pitch	[mm]	3.81		
极数 Poles	[P]	2-24		
剥线长度 Stripping Length	[mm]	-		
螺丝 Screw/ 扭矩 Torque(Max)	[N.m]	-		
工作温度 Operating temperatur	[°C]	-40~+105		
引针尺寸 Pin Dimensions	[mm]	3.7		
PCB板孔径 PCB Hole Diameter	[mm]	1.4		

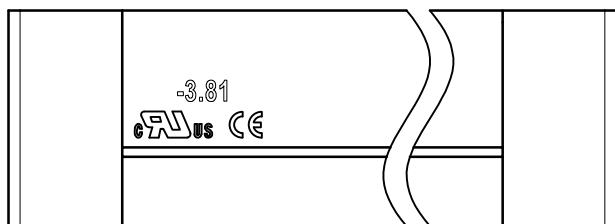

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 插拔式接线端子 3.81PH 带螺丝 弯针	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC218-JDX-381	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2607201744	
			SHEET NO. 1 OF 1	