
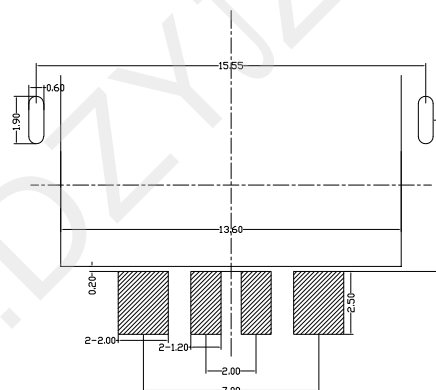


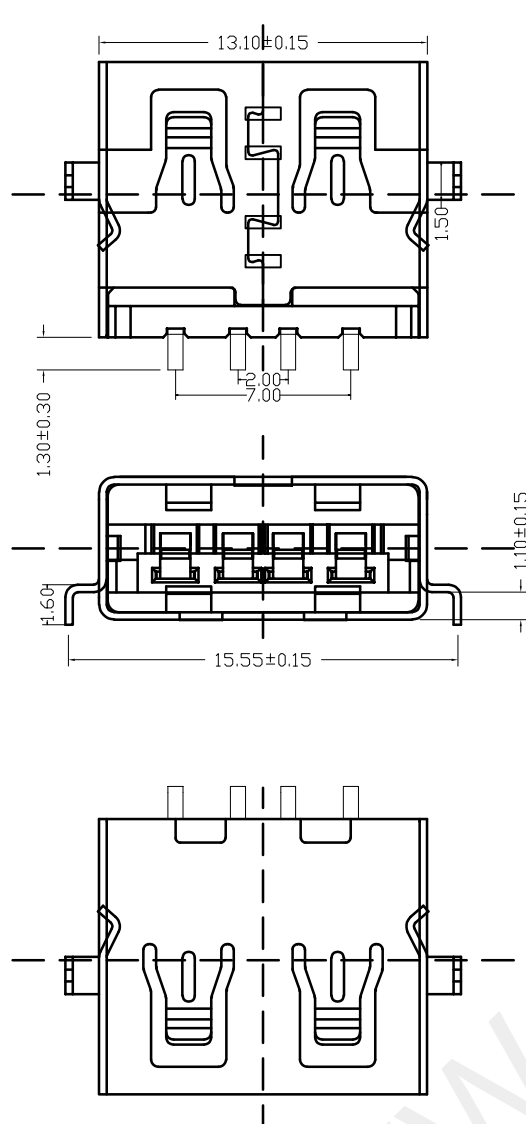

规格说明: Specifications

电气特性: Electyical:

- 额定电流: Current Rating
1.5A/contact termianl
- 额定电压: Voltage Rating
30V DC
- 接触阻抗: Contact Resistance
30 milliohms MAC
- 耐电压: Dielectnic Withstanding Voitage:
500V AC AT Sea Levot
- 绝缘抗组: Lnsulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Cnnetor Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
- 端子保持力: Terminal Retenion
1.0kgf (MIN)

原材料: Matorial:

- 塑胶: Housing:
Hing Temperature Tnermaplastics
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 端子: Contact: Piated Gold in Mating Area
Tin On Solder Talls

端子四周镀50U" (MIN) 锡, 镀金区域镀100-200U" 镀金1U"

- 外壳: Shell:
铁/铜壳四周镀80U" (MIN) 锡
Nickel Plating



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." ± 2 " X.X" ± 0.5 "	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB AF 11.0 沉板1.1 外壳两脚DIP无边	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC362-USBA04-110	MOLD NO.
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2607281602	SHEET NO. 1 OF 1