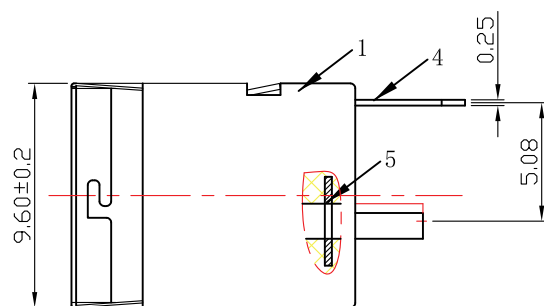

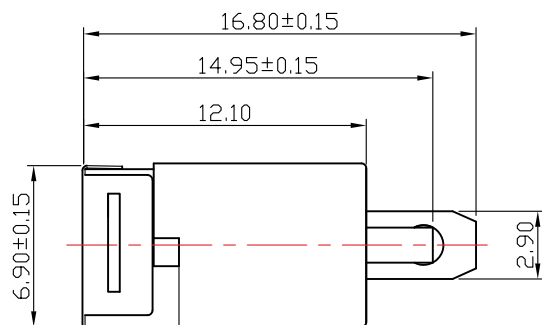


线路板开孔尺寸图

1 CENTER PN (+)

2 SPRING (-)

电路原理图

技术要求

1. 额定值: DC 30V 1A;
2. 接触电阻: $\leq 30\text{m}\Omega$;
3. 绝缘电阻: $\geq 100\text{M}\Omega$;
4. 耐压: AC500V (50Hz) 1min;
5. 插拔力: 3-30N;
6. 使用温度范围: $-30\sim 70^\circ\text{C}$;
7. 使用寿命: 5000次;

序号	零件名称	编 号	材 料	电 镀	数量	备注
6						
5	定位片	DC-044F-06	铁皮	铜 锡	1	
4	接触片	DC-044F-05	磷铜 C5191 T=0.25	镀 银	1	
3	前盖	DC-044F-03	不锈钢 SUS 301 Y=0.15	清 洗	1	
2	圆针	DC-044F-02	黄铜棒H65	铜 锡	1	φ2.5
1	基座	DC-044F-01	PA9T UL 94V-0		1	黑



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DC-044F	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-DC044F-250
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2607291036
SCALE:1:1	SIZE: A4		SHEET NO.	1 OF 1