

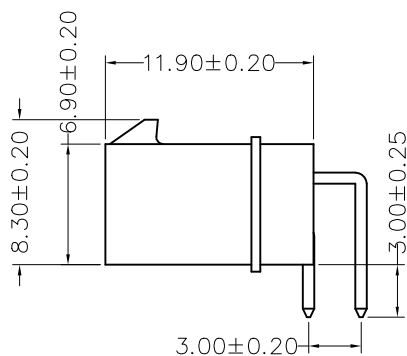
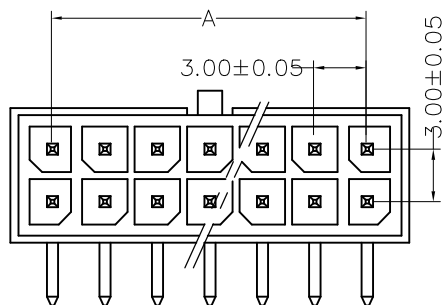



Poles	Part NO.	Dimensions mm		
		A	B	C
2	2X1P		3.9	
4	2X2P	3.0	6.9	7.7
6	2X3P	6.0	9.9	10.7
8	2X4P	9.0	12.9	13.7
10	2X5P	12.0	15.9	16.7
12	2X6P	15.0	18.9	19.7
14	2X7P	18.0	21.9	22.7

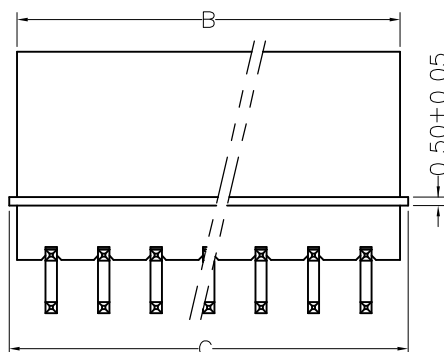

SPECIFICATIONS

- 极数 Poles: 2xNP
- 额定电流 Current rating: 5.0A AC,DC
- 额定电压 Voltage rating: 250V AC,DC
- 温度范围 Temperature range: -40° C to +105° C
- 接触电阻 Contact resistance: $\leq 15\text{m}\Omega$
- 绝缘电阻 Insulation resistance: $\geq 1000\text{M}\Omega$
- 耐电压 Withstand voltage: 1500V AC/minute
- 焊锡耐热性 Solder Resistance: 焊接时间 Soldering time 3-5s
焊接温度 Temperature $\angle 265^{\circ}\text{C}$
- 适用基板厚度 Applicable PC board thickness: 0.8mm to 2.0mm
- 材质 The material: Base: PA66-UL94-V2 HF
Pin针: Brass
- 表面处理 Surface treatment PIN针: 镀底镍 $30\mu\text{''}-50\mu\text{''}$: 表面镀锡。
Ni ckeled more than $30\mu\text{''}-50\mu\text{''}$, tin-plated.

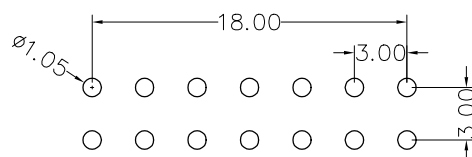

P. C. B LAYOUT



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MX3.0 2XNP 弯针	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC128-2XNAW-300	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2607291636	SHEET NO. 1 OF 1