



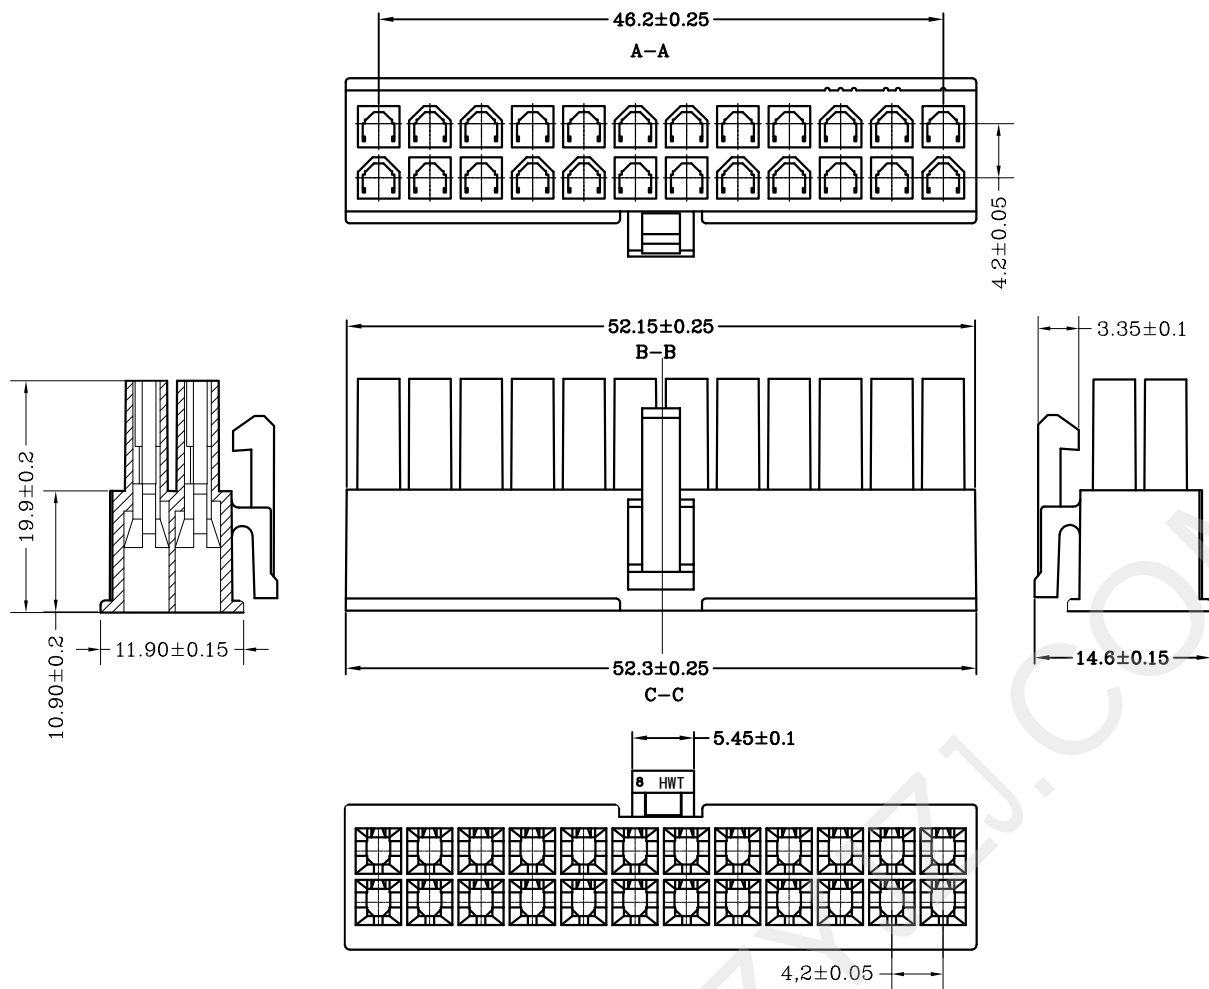

Part NO.	Dimensions mm		
	A	B	C
2X1P	—	5.40	5.60
2X2P	4.20	9.60	9.80
2X3P	8.40	13.80	14.00
2X4P	12.60	18.00	18.20
2X5P	16.80	22.20	22.40
2X6P	21.00	26.40	26.60
2X7P	25.20	30.60	30.80
2X8P	29.40	34.80	35.00
2X9P	33.60	39.00	39.20
2X10P	37.80	43.20	43.40
2X11P	42.00	47.40	47.60
2X12P	46.20	52.15	52.30

规格 Specifications

- ◆1、极数 Poles: 1X2P/1X5P to 2X1P/2X12P
- ◆2、额定电流 Current rating: 9.0A AC, DC
- ◆3、额定电压 Voltage rating: 250V AC, DC
- ◆4、温度范围 Temperature range: -25°C to $+85^{\circ}\text{C}$
- ◆5、接触电阻 Contact resistance: $\leq 10\text{m}\Omega$
- ◆6、绝缘电阻 Insulation resistance: $\geq 1000\text{m}\Omega$
- ◆7、耐电压 Withstand voltage: 1500V AC/minute
- ◆8、适用线规 Applicable wire: AWG #16 to #30
- ◆9、适用基板厚度 (Applicable PC board thickness): 0.8mm to 2.0mm

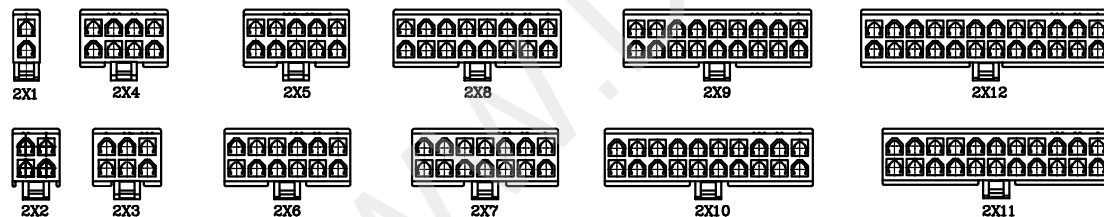

深圳市华宇创精密电子有限公司

TOLERANCE:
X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15

X" $\pm 2^{\circ}$ X.X" $\pm 0.5^{\circ}$

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :
陈一鸣

DATE :
2014-02-23

PART NAME:
5557 公壳

CHECKED BY:
马跃

DATE :
2014-02-23

PART NO.
HYC83-2XNP-420

APPROVED BY:
邱敏

DATE :
2014-02-23

DRAW NO:
HYC-2607291533

SHEET NO.
1 OF 1