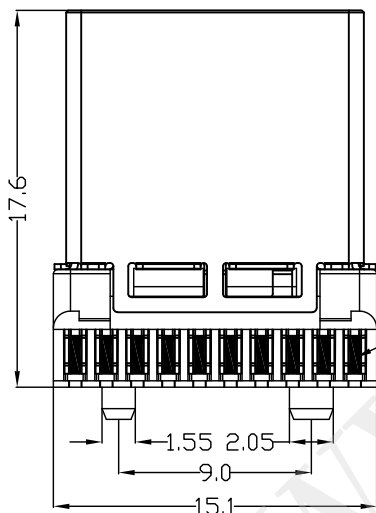
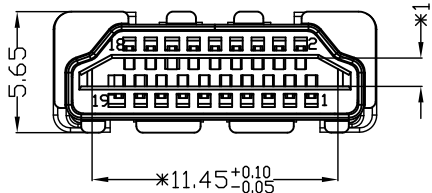
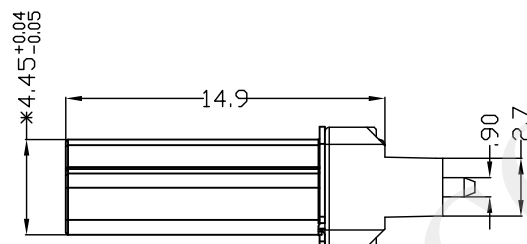

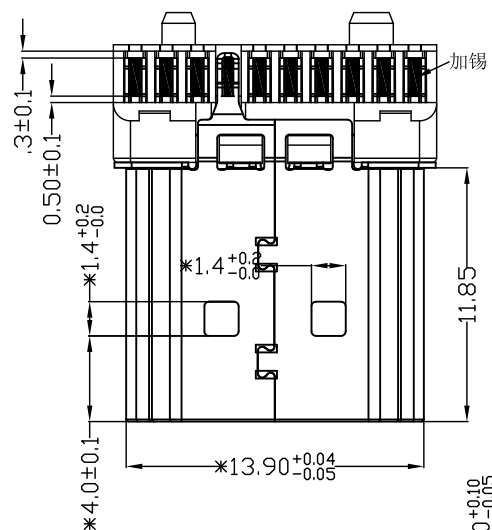


Material(材质):

- (1)Housing:LCP UL94V-0 Colour Black
- (2)Shell:Iron Plating Gold flash
- (3)Contact:copper alloy Plating Gold flash
- (4)Cover:LCP UL94V-0 Colour Black

Electrical Specifying:

- (1)CURRENT RATING: 0.5 Amp Max.
- (2)VOLTAGE RATING: 40 V ac(r.m.s) Max.
- (3)CONTACT RESISTANCE: 10m ohms Max.mated
- (4)INSULATION RESISTANCE:100M ohms Min.
- (5)DIELECTRIC WITHSTANDING VOLTAGE:
AC 500V Min. (for 1 minute)

Mechanical:

- (1)INSERTION FORCE:4.5KGF MAXMUM
- (2)WITHDRAWAL FORCE:1.0KGF MINIMUM;4.0KGF MAXMUM
- (3)Durability:5000 Cycles

Environmental:

- (1)OPERATION TEMPERATURE RANGE:-25°C~85°C



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: HDMI2.1 A TYPE 公座焊线式 加锡
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC179-HDMI A19-176
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HVC-2608011621
			SHEET NO. 1 OF 1