
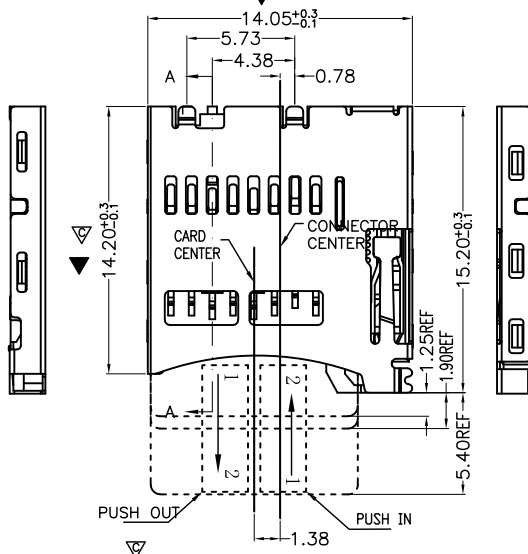


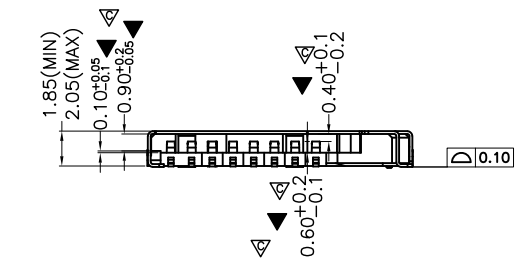


SECTION A-A

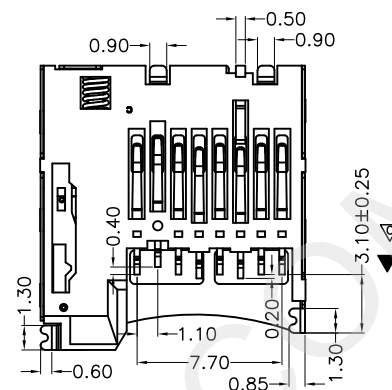

PIN NO.	NAME	YYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DATO	I/O/PP	DATE LINE(BITO)
8	DAT1	I/O/PP	DATE LINE(DIT1)

NOTES:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0.COLOR:BLACK.

CONTACT: COPPER ALLOYS.

COVER: COPPER ALLOYS OR STEEL.

2.PLATING:

UNDERPLATE: NICKEL.

CONTACT AREA: GOLD OVER NICKEL.

SOLDER AREA: TIN OVER NICKEL.



3. MULTIMEDIA CARD COMPATIBLE

4.Compliant with our company's latest "Environmental Protection Substance Control Standards"


注:

””号为首件检验尺寸

” ▼ ”号为制程巡检尺寸

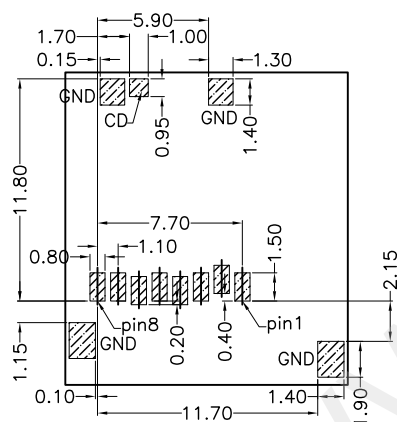

T-Flash CARD



RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: ± 0.05)



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X ±0.5*				TF PUSH 内焊常开型	
 UNIT: mm [inch]		CHECKED BY:	DATE :	PART NO.	HYC13-TF09-205
		马跃	2014-02-23	MOLD NO.	
SCALE:1:1 SIZE: A4		APPROVED BY:	DATE :	DRAW NO:	HYC-2607311731
		邱敏	2014-02-23	SHEET NO.	1 OF 1