
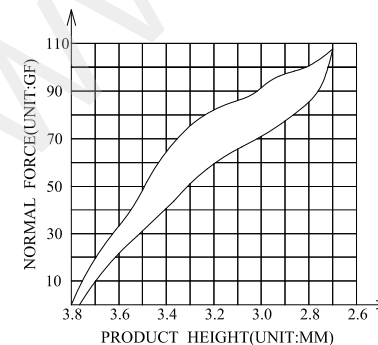



3D View

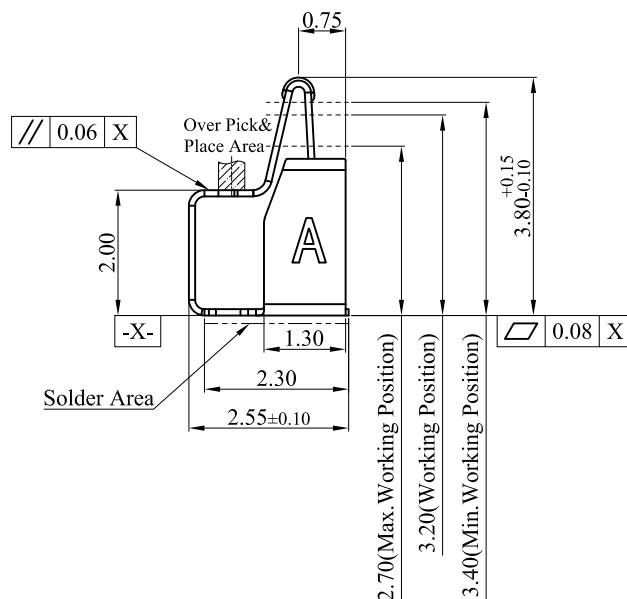

NOTES:

1:MATERIAL

1-1: SUS-301 THICKNE=0.10MM

2:SPECIFICATIONS

2-1: RATED CURRENT: 1.0A

2-2: VOLTAGE RATING: 12V

2-3: CONTACT RESISTANCE: 80mΩ/MAX

2-4: WELDING THRUST: ≥3KG

2-5: OPERATING TEMPERATURE: -40°C~+85°C

3:DURABILITY: 1500 CYCLES


4:SALT SPRAY TIME: 24H

5:ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50u" MIN

6:REQUIREMENTS


6-1: TERMINAL TO EAT FULL TIN, NOT PEELING,
WELDING OBVIOUS COLOR AND OTHER ADVERSE

6-2: ROHS, REACH, HF HALOGEN ADVERSE OF DOMESTIC
AND INTERNATIONAL ENVIRONMENTAL REQUIREMENTS




RECOMMENDED PCB LAYOUT

TOLERANCE: ±0.05MM
(FOR REFERENCE ONLY)



METAL MASK T=0.08

TOLERANCE: ±0.05MM
(FOR REFERENCE ONLY)


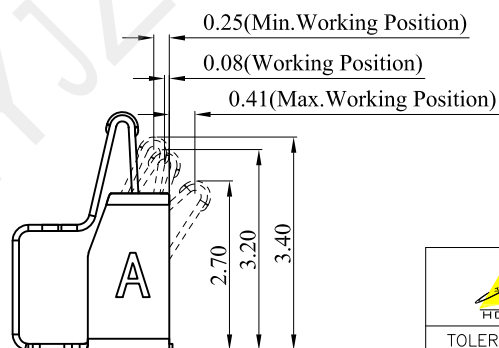


(For Reference Only)
Stated At Compression




深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 天线弹片 L2.55*W1.20*H3.80	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC-TXT2551238A	
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2412191608	
			SHEET NO. 1 OF 1	

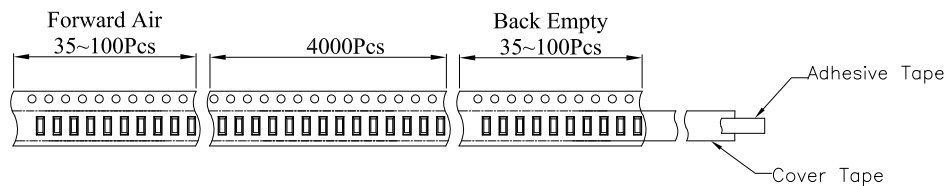
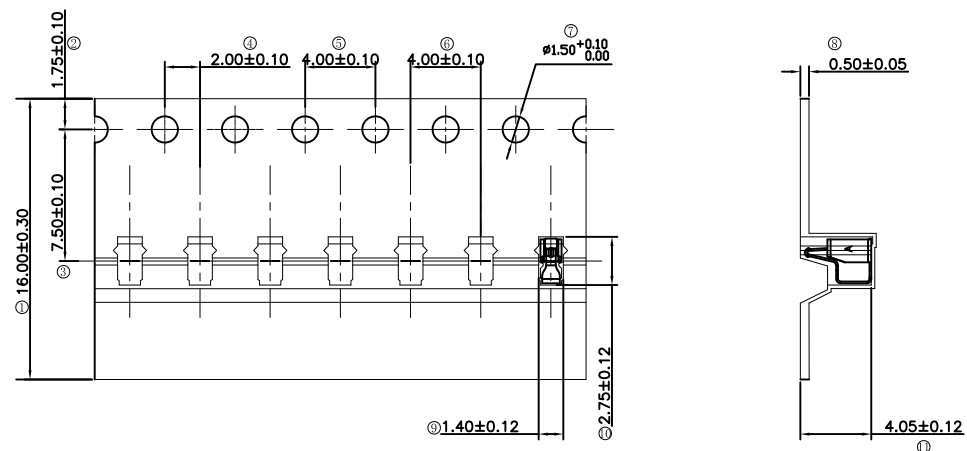


Customer To Use Direction

Pull Out Direction
(出料方向)

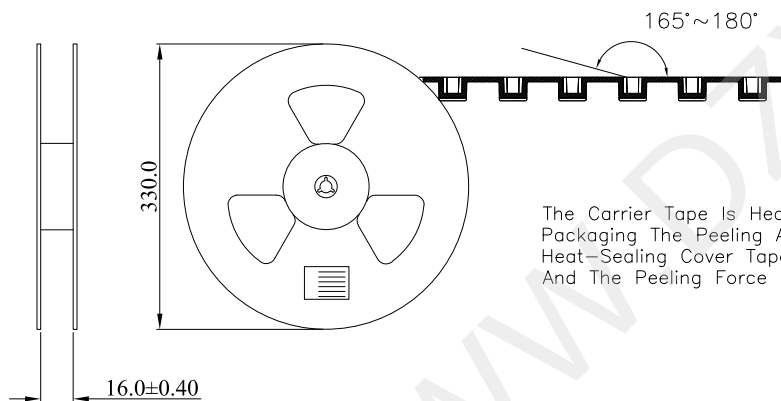

The Carrier Tape Is Heat-Sealed Packaging. The Peeling Angle Of The Heat-Sealing Cover Tape Is $165^\circ \sim 180^\circ$ And The Peeling Force Is $30 \sim 120g$.

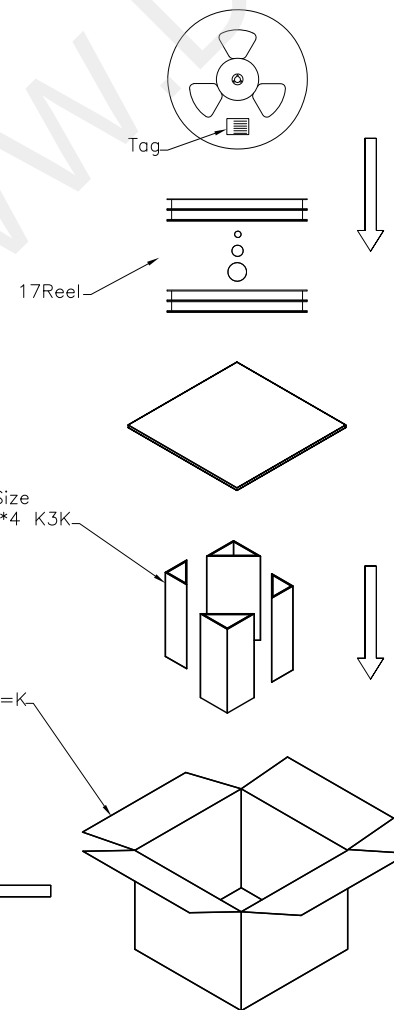

 深圳市华宇创精密电子有限公司				
TOLERANCE:		DRAWN BY :	DATE :	PART NAME:
X.X ± 0.30		陈一鸣	2014-02-23	包装图
X.XX ± 0.25		CHECKED BY:	DATE :	PART NO.
X.XXX ± 0.15		马跃	2014-02-23	MOLD NO.
X.' $\pm 2'$ X.X' $\pm 0.5'$		APPROVED BY:	DATE :	DRAW NO:
UNIT: mm [inch]		邱敏	2014-02-23	SHEET NO.
SCALE:1:1	SIZE: A4			1 OF 1