
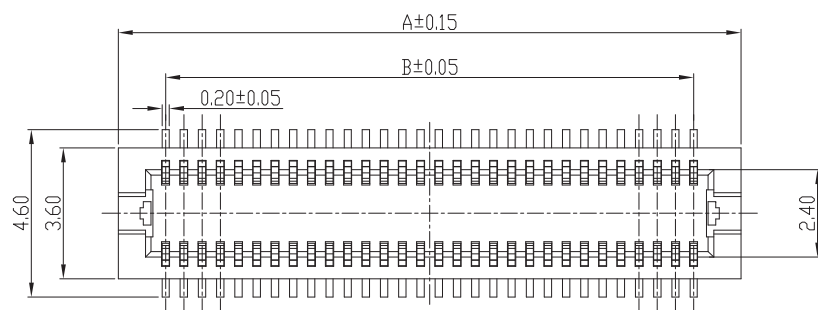
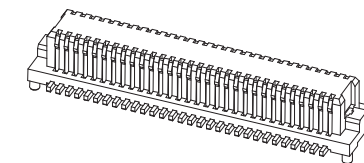



H	H1	H2		A	B	C	D
3.0	2.2	2.3	10 PIN	4.60	2.00	3.10	4.10
3.5	2.7	2.8	12 PIN	5.10	2.50	3.60	4.60
4.0	2.7	3.3	14 PIN	5.60	3.00	4.10	5.10
5.0	2.7	4.3	20 PIN	7.10	4.50	5.60	6.60
			22 PIN	7.60	5.00	6.10	7.10
			24 PIN	8.10	5.50	6.60	7.60
			30 PIN	9.60	7.00	8.10	9.10
			32 PIN	10.10	7.50	8.60	9.60
			36 PIN	11.10	8.50	9.60	10.60
			40 PIN	12.10	9.50	10.60	11.60
			50 PIN	14.60	12.00	13.10	14.10
			60 PIN	17.10	14.50	15.60	16.60
			80 PIN	22.10	19.50	20.60	21.60

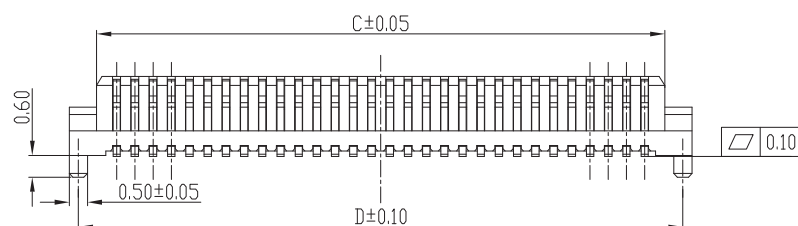

RECOMMENDED PCB LAYOUT(TOP VIEW)

Note:

Electrical

Current Rating:0.5A max

Contact Resistance:50mΩ max(Initial),75mΩ max(After)

Dielectric Withstanding Voltage:150VAC

Insulation Resistance 500mega ohms min. at 100 VDC

Physical

Housing:thermoplastic, UL 94V-0 rated,inWhite Color

Contact: Copper alloy

Operating Temperature:-40°C to +85°C



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X.* ±2* X.X* ±0.5*



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

0.5PH DF12 公座BTB 无接地片

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC44M-BTB2XN-XXX

MOLD NO.

APPROVED BY:

邱敏

DATE :






2014-02-23

DRAW NO:

HYC-2608081202

SHEET NO.

1 OF 1

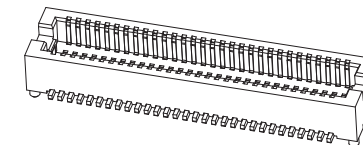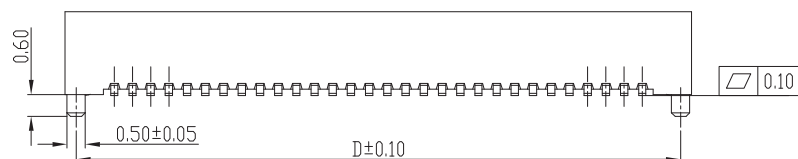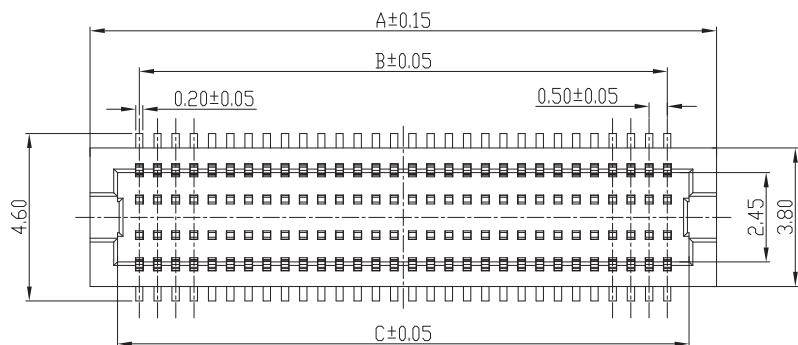

H	H1	H2		A	B	C	D
3.0	2.2	2.3	10 PIN	4.70	2.00	3.20	4.10
3.5	2.7	2.8	12 PIN	5.20	2.50	3.70	4.60
4.0	2.7	3.3	14 PIN	5.70	3.00	4.20	5.10
5.0	2.7	4.3	20 PIN	7.20	4.50	5.70	6.60
			22 PIN	7.70	5.00	6.20	7.10
			24 PIN	8.20	5.50	6.70	7.60
			30 PIN	9.70	7.00	8.20	9.10
			32 PIN	10.20	7.50	8.70	9.60
			36 PIN	11.20	8.50	9.70	10.60
			40 PIN	12.20	9.50	10.70	11.60
			50 PIN	14.70	12.00	13.20	14.10
			60 PIN	17.20	14.50	15.70	16.60
			80 PIN	22.20	19.50	20.70	21.60

Note:

Electrical

Current Rating:0.5A max

Contact Resistance:50m Ω max(Initial),75m Ω max(After)

Dielectric Withstanding Voltage:150VAC


Insulation Resistance 500mega ohms min. at 100 VDC

Physical

Housing:thermoplastic, UL 94V-0 rated,inWhite Color

Contact: Copper alloy

Operating Temperature:-40°C to +85°C

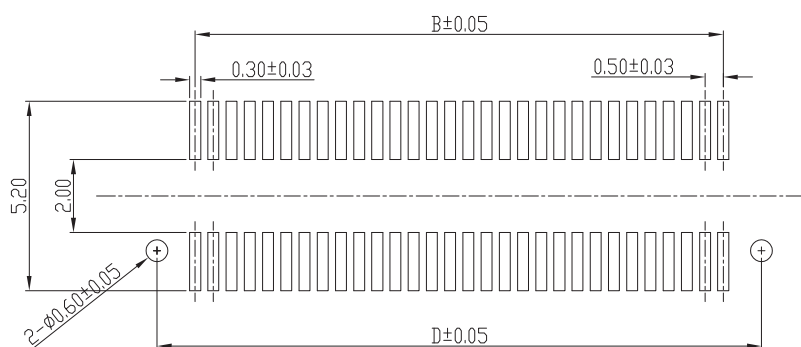

RECOMMENDED PCB LAYOUT(TOP VIEW)



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NAME:

0.5PH DF12 母座BTB 无接地片

PART NO.

HYC44F-BTB2XN-XXX

MOLD NO.

DRAW NO:

HYC-2608081207

SHEET NO.

1 OF 1