

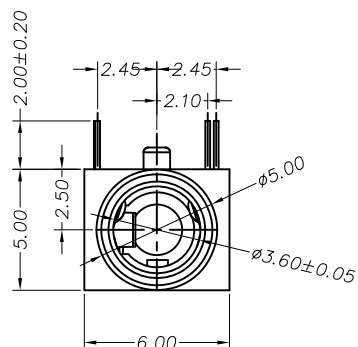

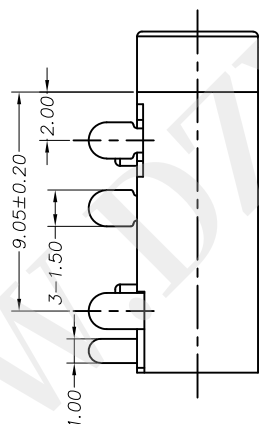
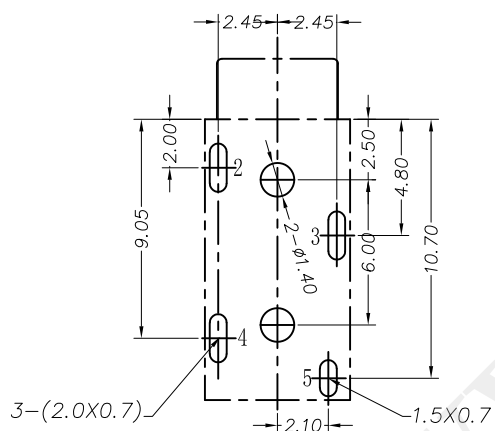
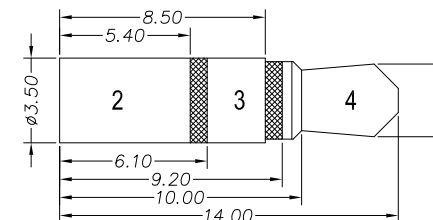
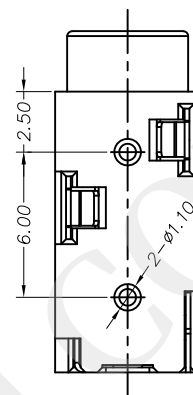


主要技术性能	
额定电负荷	DC 30V 10.5A
接触电阻	≤0.03 Ω
绝缘电阻	≥100MΩ
耐 压	AC500V(50Hz)/min
插 拔 力	3-30N
使用温度范围	-30-70℃
使用寿命	5000次

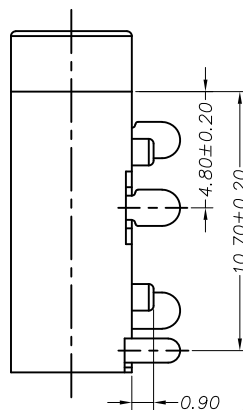

4	PJ-327C-04	盖脚	1	磷铜	0.20T	镀锡
3	PJ-327C-03	弹片	1	磷铜	0.20T	镀锡
2	PJ-327C-02	中脚	2	磷铜	0.20T	镀锡
1	PJ-327C-01	底座	1	PPA		黑色
序号	产品编号	产品名称	数量	材料	规格	处理

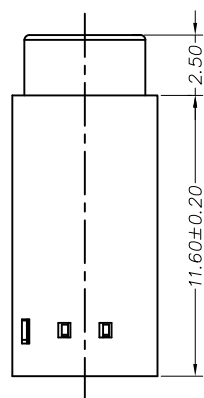

深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30	X.XX ±0.25			耳机座	
X.XXX ±0.15		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-PJ327C-200
X: ±2°	X.X ±0.5°			MOLD NO.	
		APPROVED BY:	DATE :	DRAW NO:	
UNIT: mm [inch]		邱敏	2014-02-23	SHEET NO.	1 OF 1
SCALE: 1:1	SIZE: A4				