
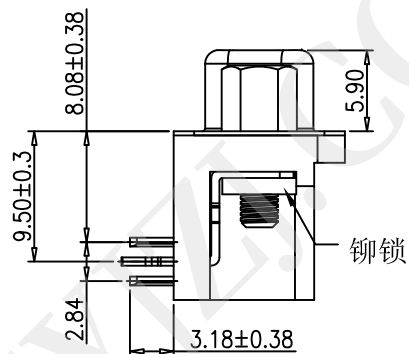
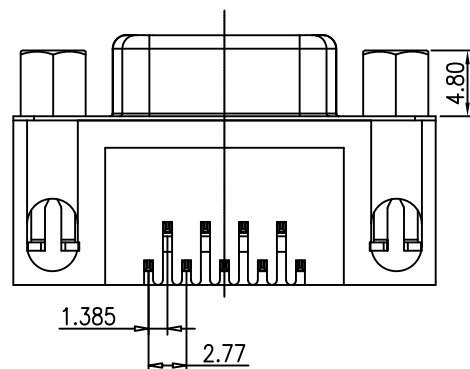


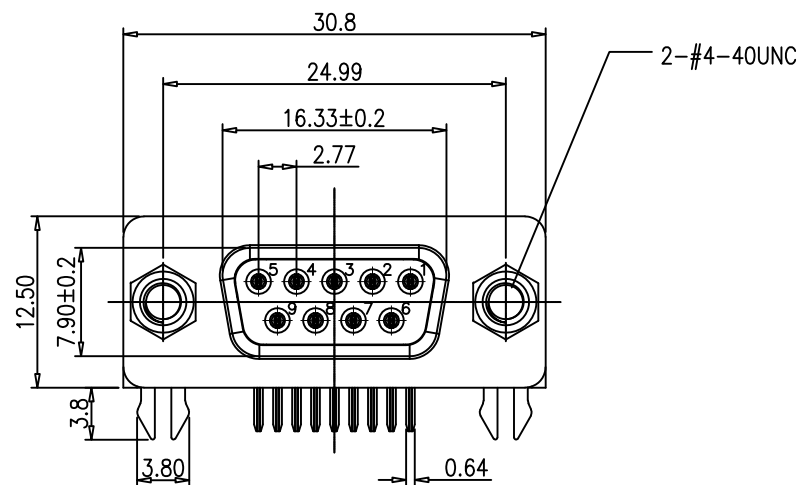

NOTE:

1.MATERIAL:


- 1.1 HOUSING: PBT, COLOR:BLACK.
1.2 TERMINAL: COPPER ALLOY.
1.3 SHELL: SPCC
1.4 RIVET: COPPER ALLOY.
1.5 SCREW: SPCC

2. PLATING:


- 2.1 CONTACT:
80u" Min. TIN PLATED OVERALL
30u" Min. NICKEL UNDER-PLATED
- 2.2 SHELL: 50u" Min, NICKEL PLATED OVERALL
- 2.3 RIVET: NICKEL PLATED OVERALL
- 2.4 SCREW: NICKEL PLATED OVERALL

3. SPECIFICATIONS:

- VOLTAGE: 250 VAC(RMS) MAX.
CURRENT RATING: 3 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(RMS)
MATING FORCE: 5.1Kg.Max.
UNMATING FORCE: 1.0~4.0Kg.
OPERATING TEMPERATURE: -25°C ~ +85°C

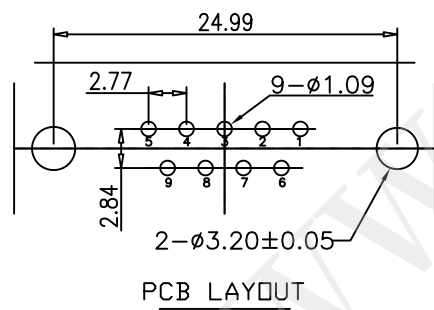

深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X: ±2" X.X ±0.5"				DR9 母铆锁	
		CHECKED BY:	DATE :	PART NO.	HYC240-VGA09B-308
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]		APPROVED BY:	DATE :	DRAW NO:	HYC-2608171133
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1