

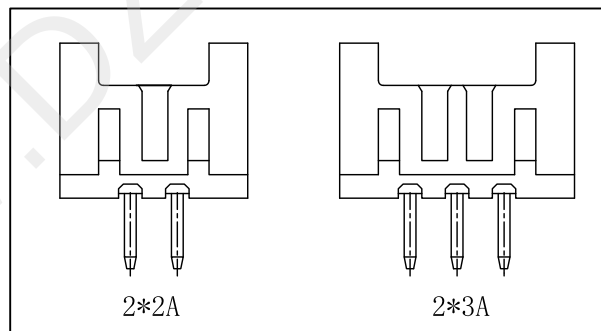
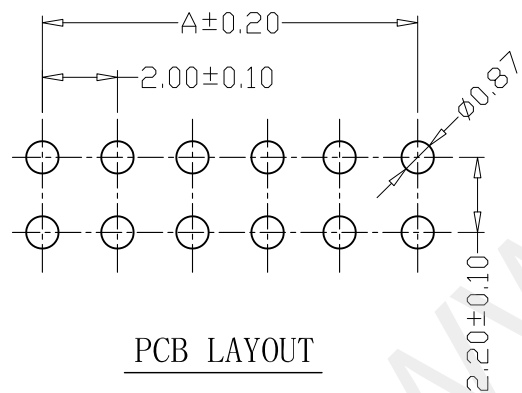
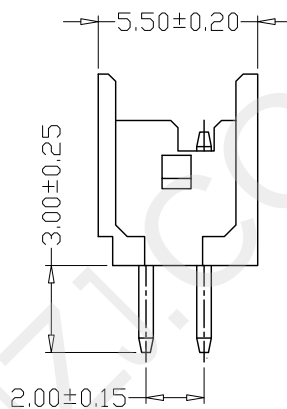
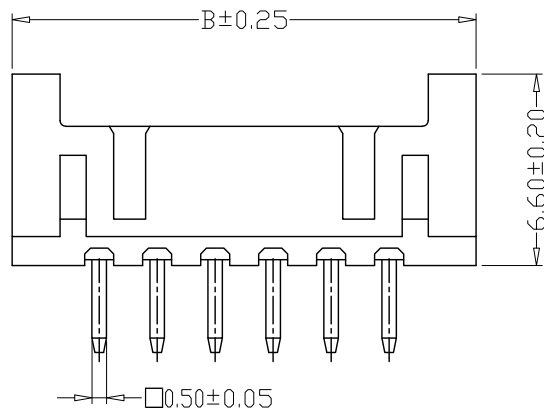


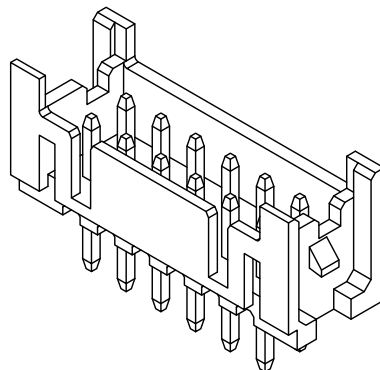

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperatuer Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - 4、Contact Resistance: $20\text{m}\Omega$ Max
 - 5、Insulation Resistance: $1000\text{M}\Omega$ Min
 - 6、Withstanding Voltang: 800V AC/minute
 - 7、Material: Wafer PA46, UL94V-0
- PIN Brass Tin-plated

PIN	尺寸 (mm)		
	A	B	C
2*02A	2.00	8.00	4.80
2*03A	4.00	10.00	6.80
2*04A	6.00	12.00	8.80
2*05A	8.00	14.00	10.80
2*06A	10.00	16.00	12.80
2*07A	12.00	18.00	14.80
2*08A	14.00	20.00	16.80
2*09A	16.00	22.00	18.80
2*10A	18.00	24.00	20.80
2*11A	20.00	26.00	22.80
2*12A	22.00	28.00	24.80
2*13A	24.00	30.00	26.80
2*14A	26.00	32.00	28.80
2*15A	28.00	34.00	30.80
2*16A	30.00	36.00	32.80
2*17A	32.00	38.00	34.80
2*18A	34.00	40.00	36.80
2*19A	36.00	42.00	38.80
2*20A	38.00	44.00	40.80

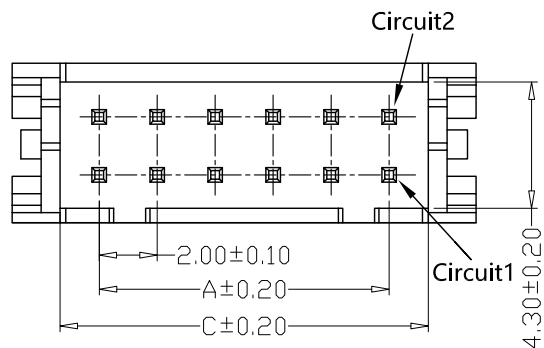

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15
X.' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

PART NAME:

PHDS 双头带钩直针

CHECKED BY:

马跃

DATE:

2014-02-23

PART NO.

HYC294-2XNA-200

MOLD NO.

APPROVED BY:

邱敏

DATE:

2014-02-23

DRAW NO:

HYC-2605271114

SHEET NO.

1 OF 1