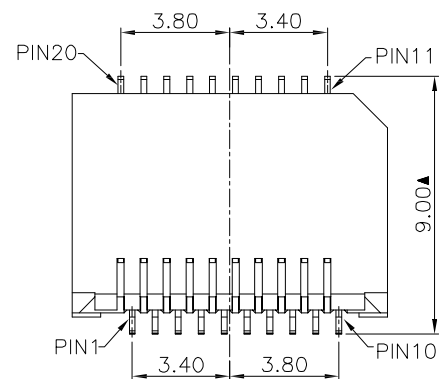


说明:

1. 材质:

胶芯: LCP, UL94V-0; COLOR; BLACK

端子: C5191

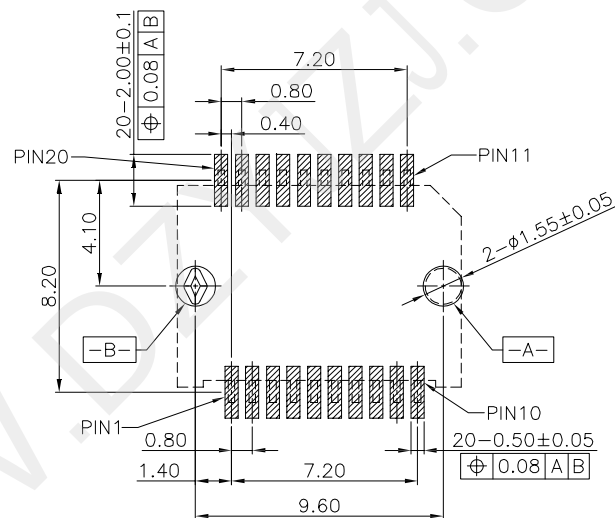
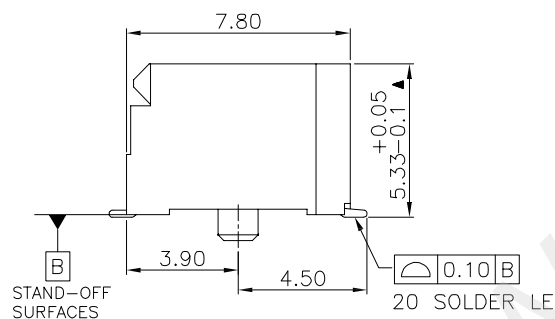
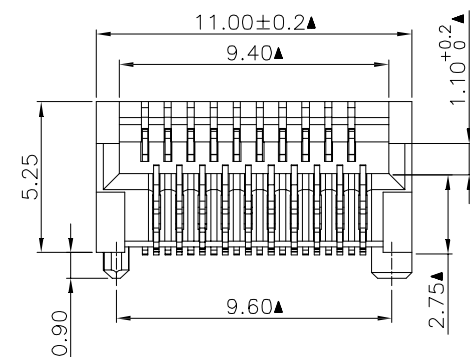
2. 电镀说明:

端子: 接触区域镀金15U

焊锡区域镀锡

全部区域镍底

3. 性能说明:

1) 额定电压: $\geq 120\text{VAC RMS}$.2) 额定电流: $\geq 1.5\text{AMP}$ 3) 接触电阻: $\leq 40\text{m}\Omega$ Max.4) 绝缘电阻: $\geq 500\text{M}\Omega$ MIN.5) 工作温度: $-40^\circ\text{C TO } +80^\circ\text{C}$.RECOMMENDED P.C.B. LAYOUT
GENERAL TOLERANCE: ± 0.05 

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." ± 2 " X.X" ± 0.5 "	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SFP CAGE 1X1 20PIN	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC10-SFP-960
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2605081021
			SHEET NO.	1 OF 1