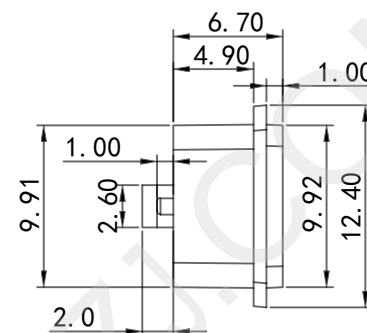
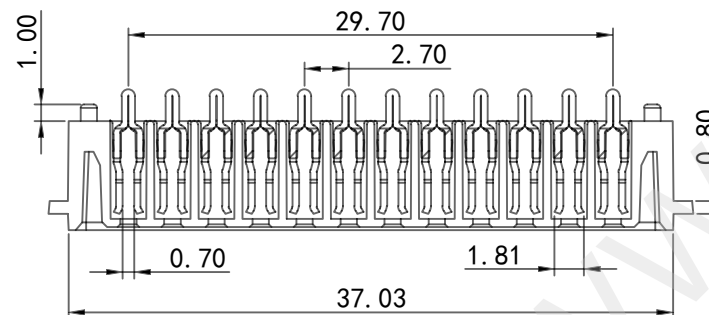
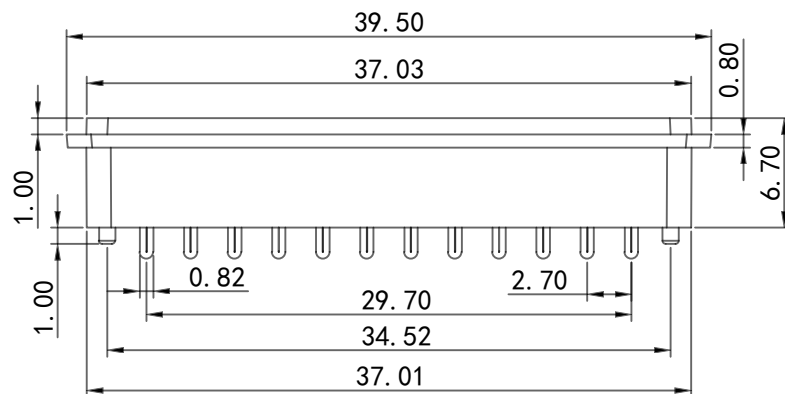


RECOMMENDED PCB LAYOUT
T=0.65MM, TOLERANCES ± 0.05 MM

NOTE:**Material****Insulator: LCP****Contact: C7521****Contact Plated: Gold over Nickel or Tin****Specification****Current Rating: 12A****Instant Current: 15A****Rated Voltage: 12V****Contact Resistance: 30m Ω** **Insulation Resistance: 100M Ω** **Dielectric Voltage: 500V****Operating Temperature: -40° ~105°**

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	C7521	12	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

**深圳市华宇创精密电子有限公司**

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 2.7PH 12P 直插母座 带柱	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-BM12P2767DD
		APPROVED BY:	DATE :	MOLD NO.	
		邱敏	2014-02-23	DRAW NO:	HYC-2608191851
				SHEET NO.	1 OF 1