


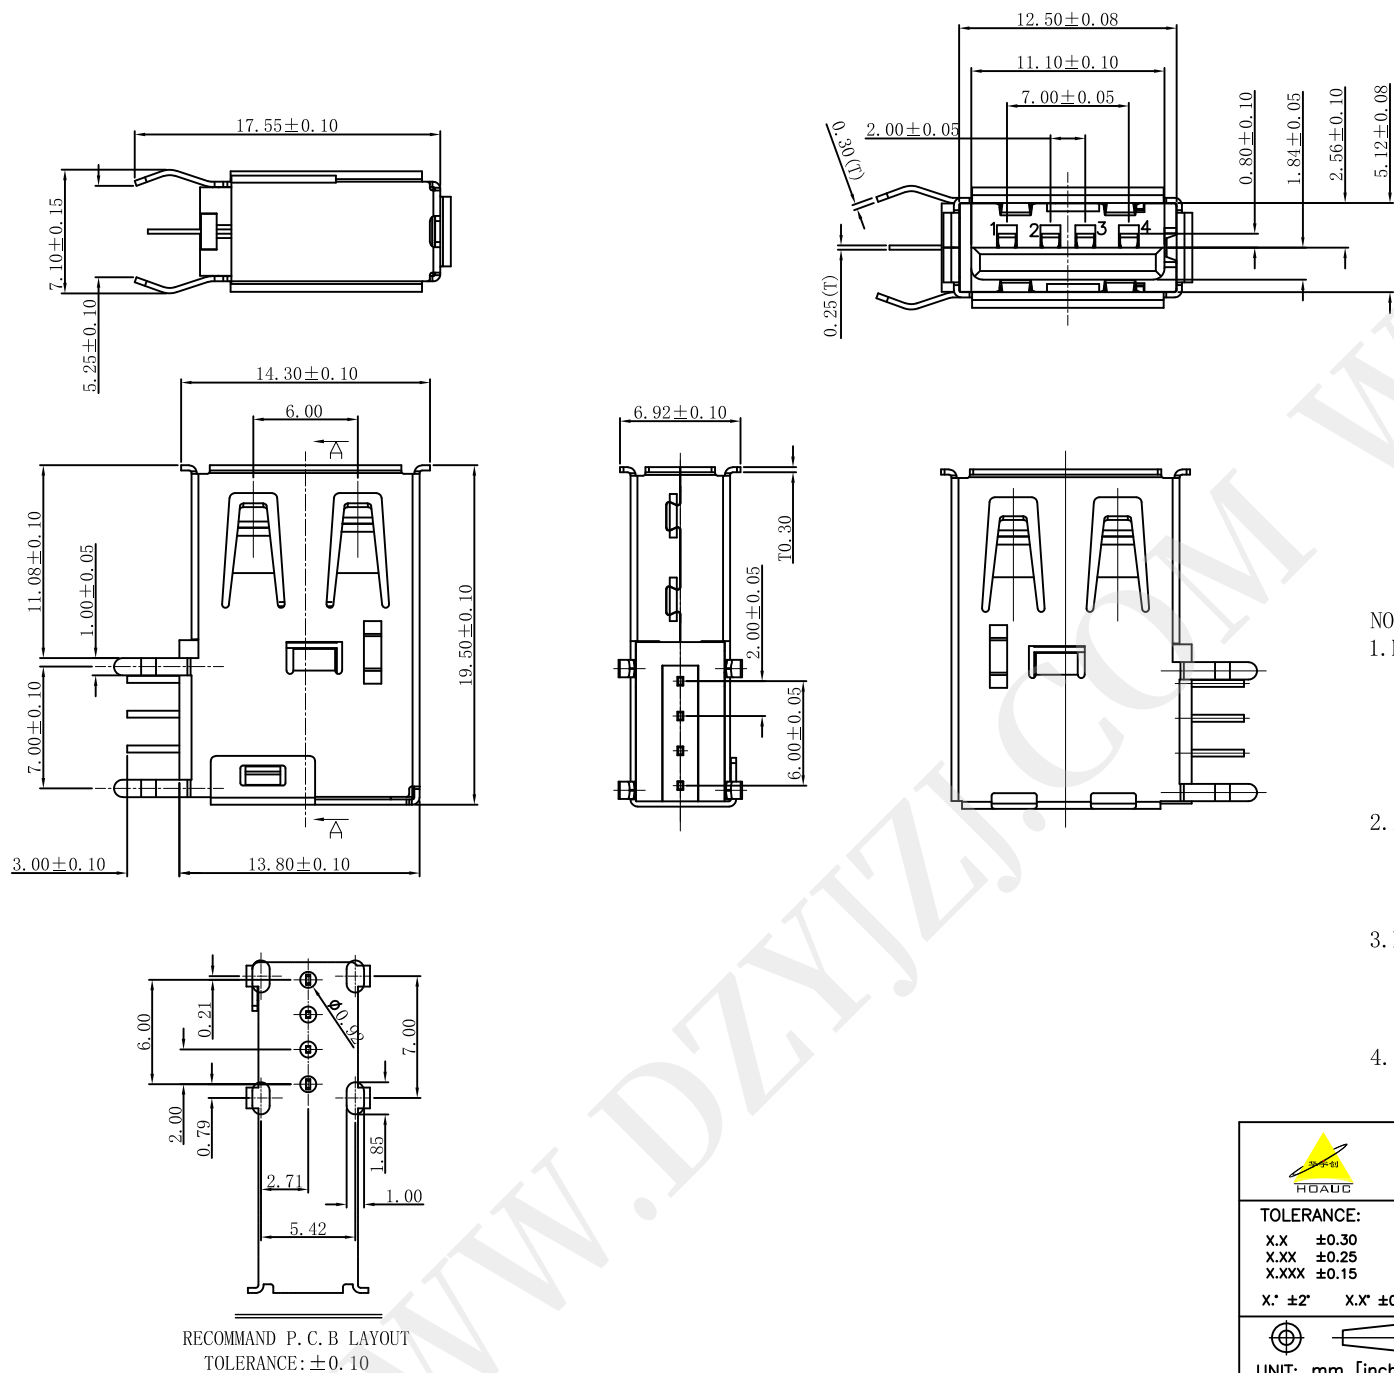

NOTES:

1. MATERIAL SPECIFICATION

- 1) INSULATION MATERIAL THERMOPLASTIC.
- 2) SHELL: COPPER ALLOY, T: 0.30mm
PLATING: NICKEL
- 3) TERMINAL: COPPER ALLOY, T: 0.25mm
PLATING: GOLD/TIN PLATED.

2. ELECTRICAL CHARACTERISTIC:

- 1) INSULATION RESISTANCE: 1000M Ω MIN.
- 2) CONTACT RESISTANCE: 30m Ω MAX.
- 3) WITHSTANDING VOLTAGE: 500V AC.

3. MECHANICAL CHARACTERISTICS:

- 1) INSERTION FORCE: 3.57Kgf MAX.
- 2) EXTRACTION FORCE: 1.02Kgf MIN.
- 3) DURABILITY: 1500 CYCLES EXTRACTION FORCE: 10~35N

4. ENVIRONMENTAL:


OPERATING TEMPERATURE: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
X.XX ± 0.25
X.XXX ± 0.15

X' $\pm 2'$ X.X' $\pm 0.5'$



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

PART NAME:

USB AF 长体侧插 有卷边反向

CHECKED BY:

马跃

DATE:

2014-02-23

PART NO.

HVC72-USBA04-195

APPROVED BY:

邱敏

DATE:

2014-02-23

DRAW NO:

HVC-2608261132

SHEET NO.

1 OF 1