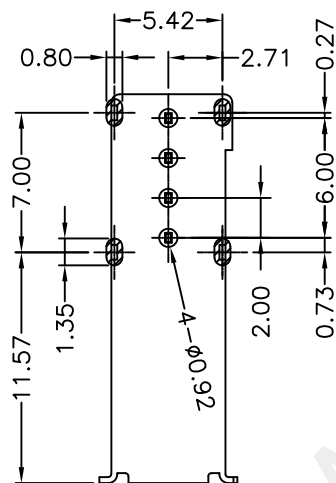
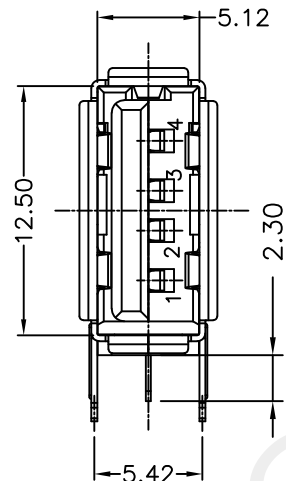
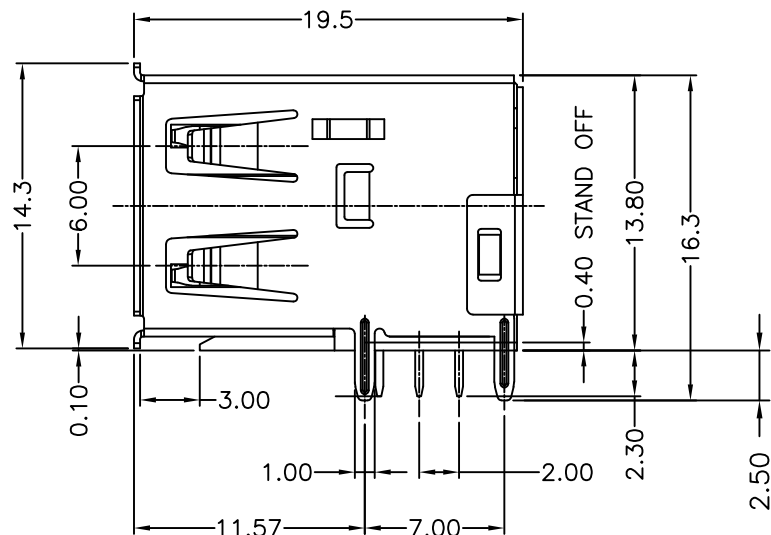
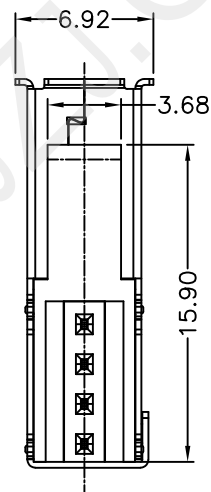
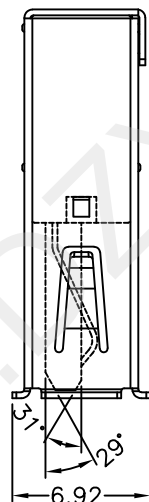


P.C.B LAYOUT
TOP VIEW ±0.05

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
SHELL: COPPER ALLOY, 60u" NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
100u" MATTE TIN PLATING ON SOLDER TAIL
50u" NICKEL UNDERPLATING OVER ALL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -45°C~+85°C



深圳市华宇创精密电子有限公司

TOLERANCE: XX ±0.30 XX ±0.25 XXX ±0.15 X° ±2° X.X° ±0.5°	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB AF 长体侧插直脚 有卷边	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HJC365-USBA04-195	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HJC-2608261150	
			SHEET NO. 1 OF 1	