
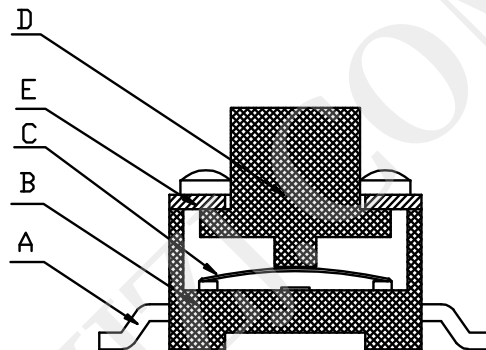
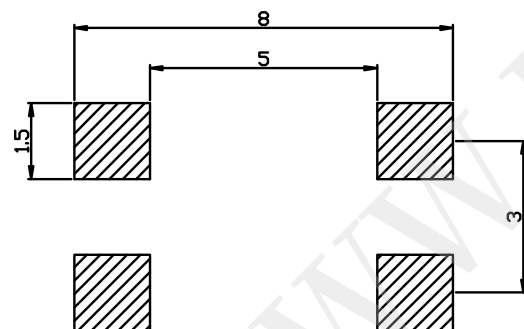
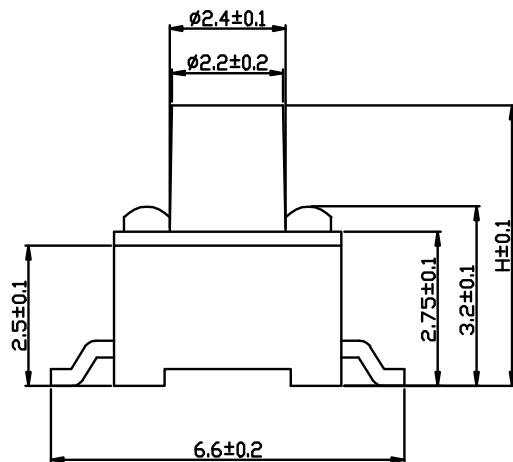


项 目	规 格	H
额定负荷	DC 12V 50mA	3.5
绝缘电阻	100M Ω min. 100V Dc	3.8
耐压强度	AC250V 50HZ 1min	4.0
电器寿命	100000次	4.3
环境温度	-25~70℃	4.5
相对湿度	(40℃) $\leq 95\%$	4.8
接触电阻	50m Ω max	5
行程	0.20 $\pm$ 0.05mm	6
动作力	260gf $\pm$ 20gf	7

E	盖板	铁皮	1	镀锡
D	按钮	PPA	1	
C	簧片	不锈钢覆银	1	
B	底座	PPA	1	
A	卡件	黄铜	1	镀银
序号	名 称	材 料	数量	备注

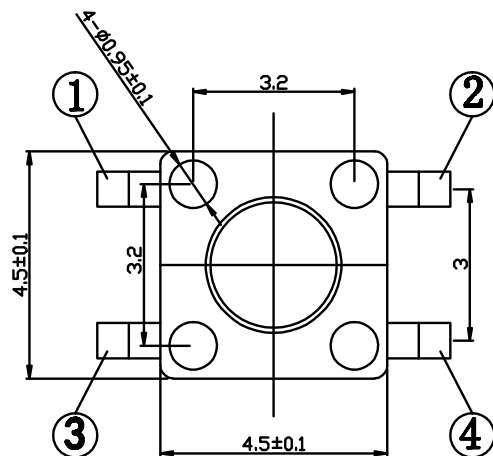

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." $\pm 2'$ X.X" $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 4.5X4.5 贴片轻触按键	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC02-S45XXL	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2608271132	SHEET NO. 1 OF 1