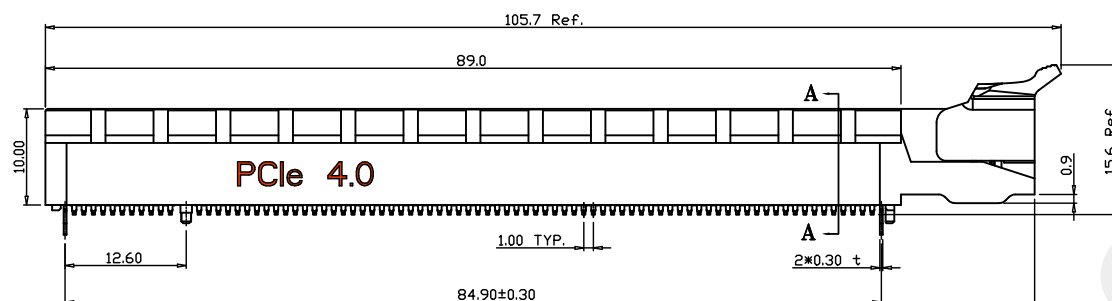

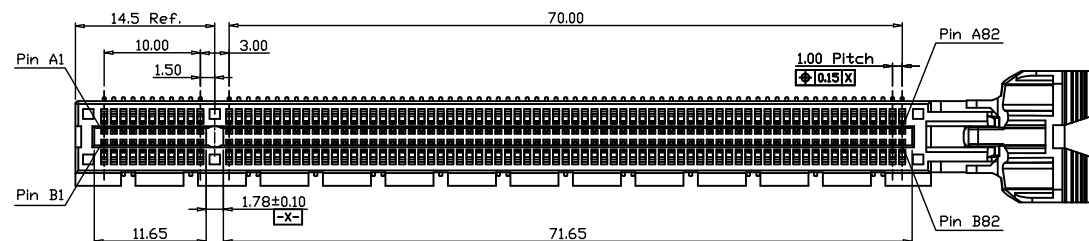
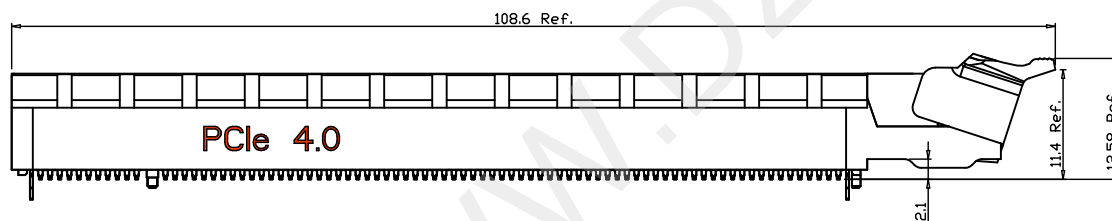
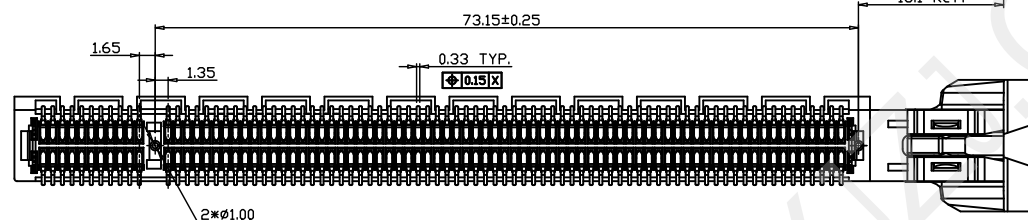

ACCEPT 1.57T
ADD IN CARD

Latch Open

1.Material:

- 1.1 Housing: PA9T+30% G/F, UL94V-0,COLOR:BLACK;
1.2 Terminal: Phosphor Bronze,T=0.25mm;
Plating: Gold in contact area;
80u" Min Tin in solder area;
30u" MIN.NICKEL UNDERPLATING OVER ALL.

- 1.3 Latch: Copper Alloy,T=0.30mm;
Plating: NICKEL UNDERPLATING OVER ALL.

2.Electrical Characteristics:

- 2.1 Contact Resistance: 30mΩ Max.
2.2 Insulation Resistance: 1000MΩ Min.
2.3 Dielectric Strength: 500V DC/1MIN.
2.4 Contact Current rating: 1.1 A Per Pin Min.

3.Mechanical Characteristics:

- 3.1 Insertion Force: 1.15N per contact pair Max.
3.2 Extraction Force: 0.15N per contact pair Min.
3.3 Durability rating: 50 Cycles

- 4.Operating temperature: -25°C ~ +85°C;


- 5.ALL MATERIAL SHOULD BE FULFILLED ROHS COMPLIANT.



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X' ±2" X.X' ±0.5"



UNIT: mm [inch]
SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

PCI-E Gen4.0 164P 无肋小耳扣旋转式

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC63-PCI164-105

APPROVED BY:

邱敏

DATE :


2014-02-23

DRAW NO:


HYC-2608241552

SHEET NO.


1 OF 1

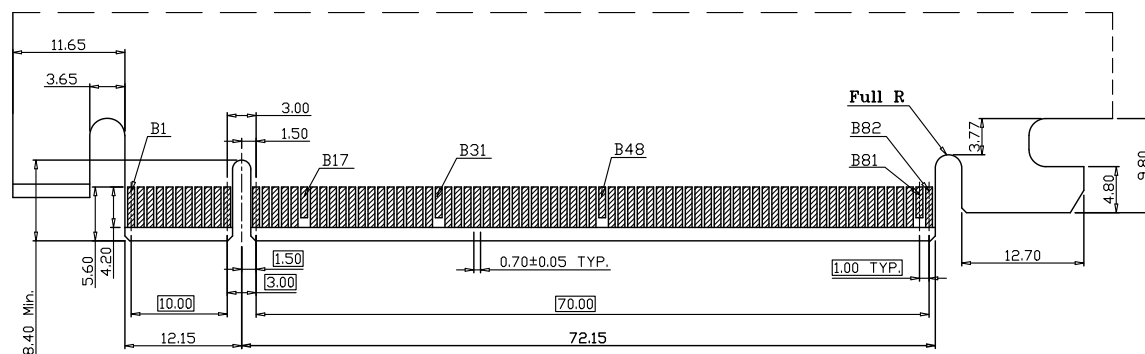



RECOMMENDED EDGE CARD PATTERN<PRIMARY SIDE>

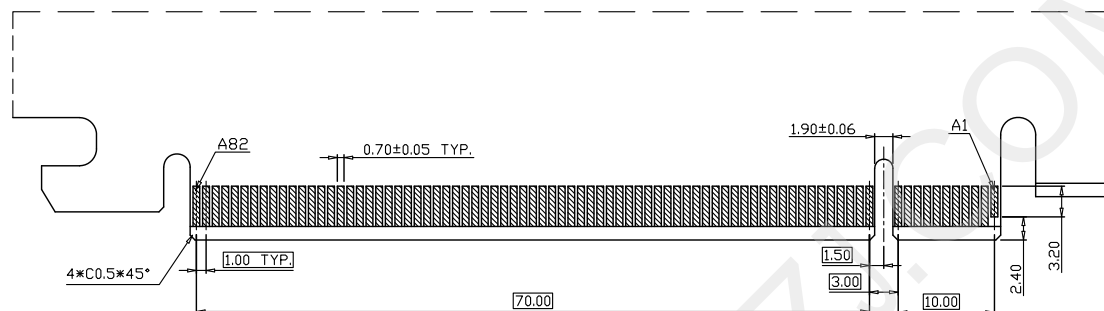

RECOMMENDED EDGE CARD PATTERN<SECONDARY SIDE>

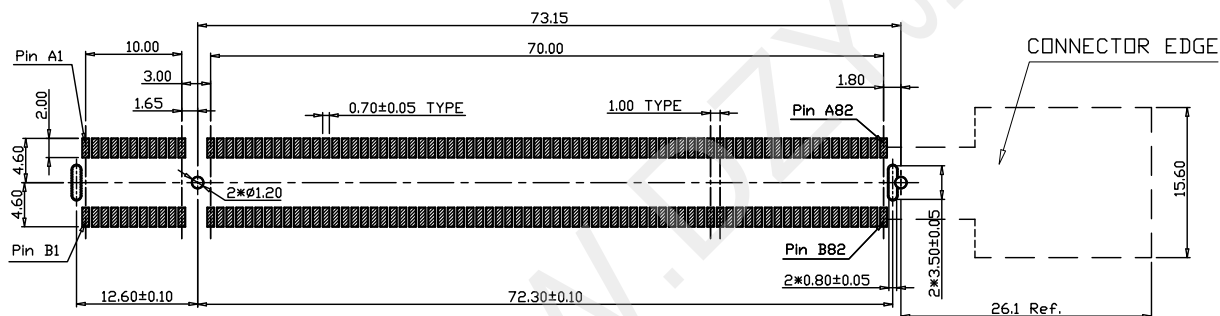

RECOMMENDED PCB LAYOUT <COMPONENT SIDE>TOLERANCE: ±0.05

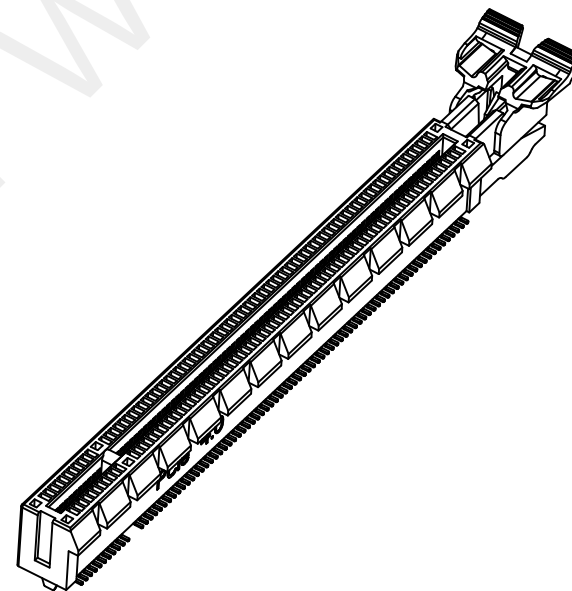

深圳市华宇创精密电子有限公司


TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X" ±2" X.X" ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱敏

DATE :

2014-02-23

PART NAME:

PCI-E Gen4.0 164P 无肋小耳扣旋转式

PART NO.

HYC63-PCI164-105

MOLD NO.

DRAW NO:

HYC-2608241552

SHEET NO.

1 OF 1