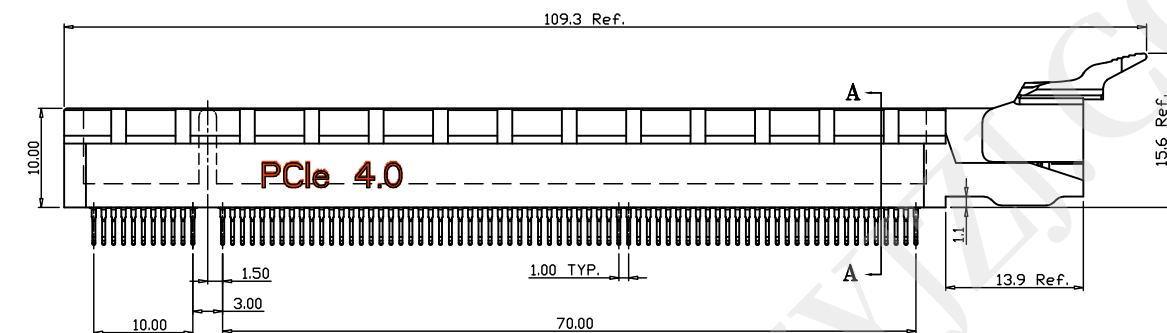

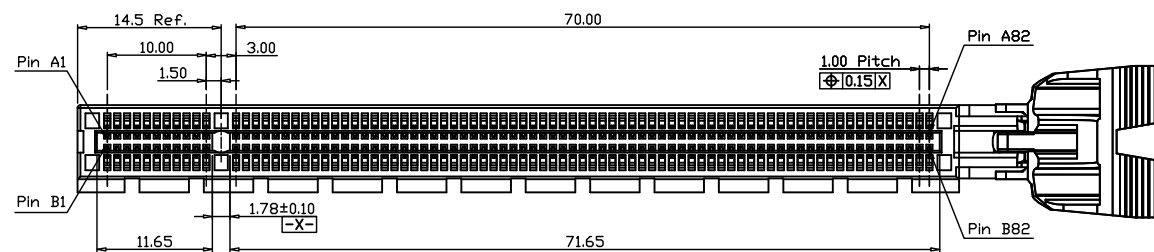
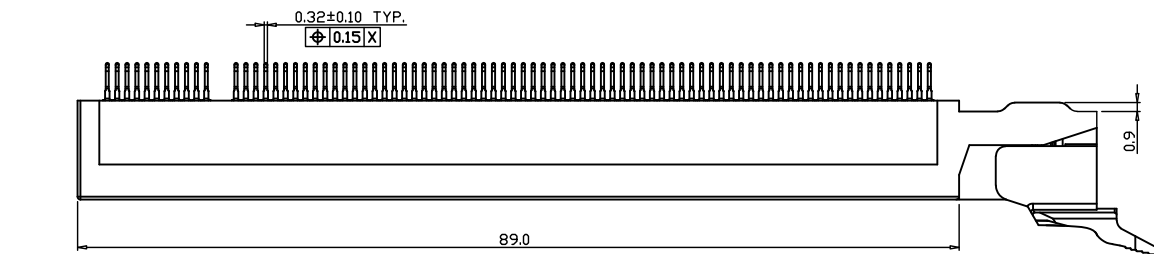


Latch Open

*Material:

- 1.Housing: LCP+30% G/F, UL94V-0,COLOR: BLACK;
- 2.Terminal: Phosphor Bronze,T=0.25mm;
Plating: Gold in contact area;
80u" Min Tin in solder area;
30u" MIN.NICKEL UNDERPLATING OVER ALL.

*Electrical Characteristics:

- 1:Contact Resistance: 30mΩ Max.
- 2:Insulation Resistance: 1000MΩ Min.
- 3:Dielectric Strength: 500V DC/1MIN.
- 4.Contact Current rating: 1.1 A Per Pin Min.

*Mechanical Characteristics:

- 1:Insertion Force: 1.15N per contact pair Max.
- 2:Extraction Force: 0.15N per contact pair Min.
- 3.Durability rating: 50 Cycles


*Operating temperature: -25°C ~ +85°C



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

PCI-E Gen4.0 164P 有屋檐旋转夹板式

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC62-PC1164-109

APPROVED BY:

邱敏

DATE :


2014-02-23

DRAW NO:


HYC-2608241138

SHEET NO.


1 OF 1

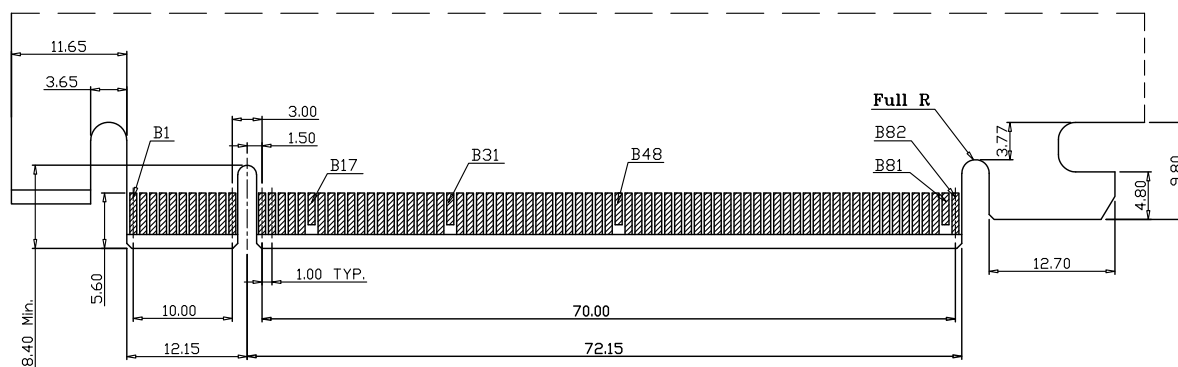



RECOMMENDED EDGE CARD PATTERN(PRIMARY SIDE)

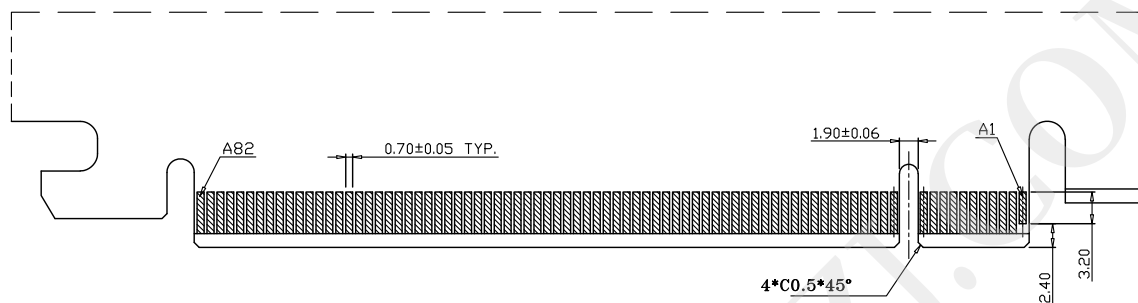


RECOMMENDED EDGE CARD PATTERN(SECONDARY SIDE)

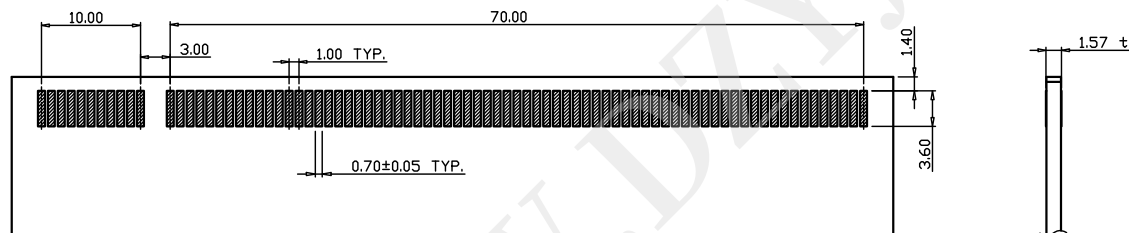

RECOMMENDED PCB LAYOUT TOLERANCE: ±0.05

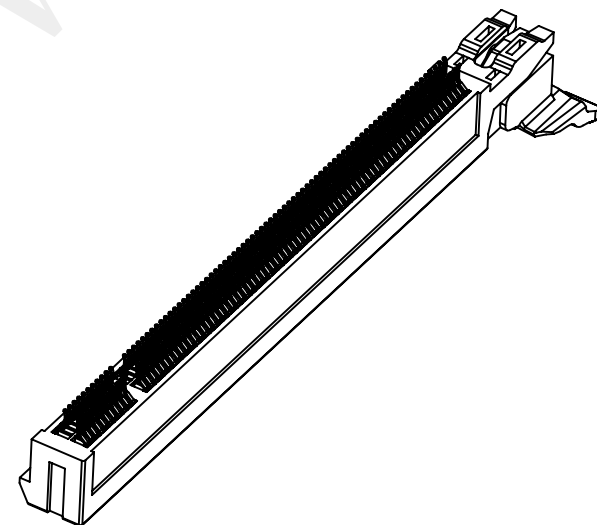

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PCI-E Gen4.0 164P 有屋檐旋转夹板式	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC62-PC1164-109	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2608241138	
			SHEET NO. 1 OF 1	