
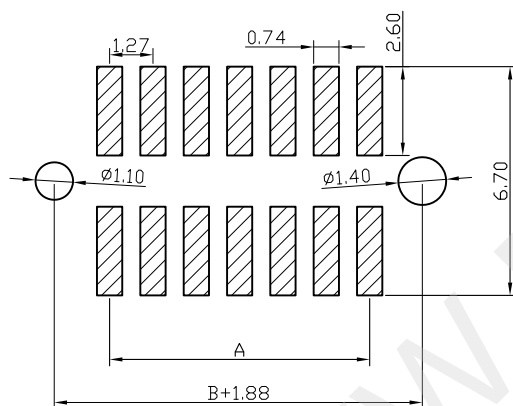
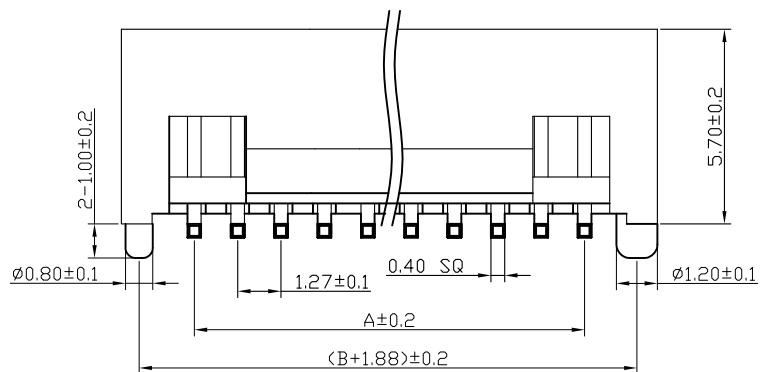
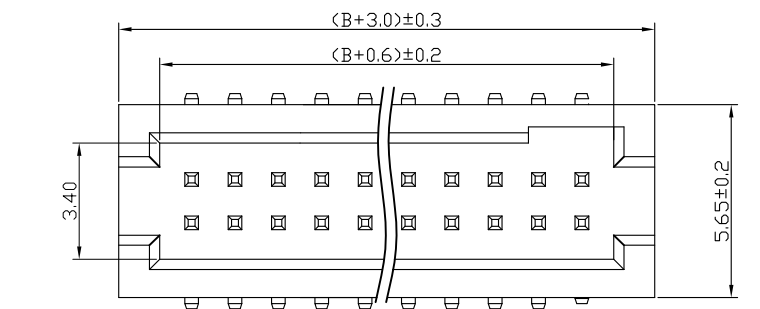




RECOMMEND P. C. B LAYOUT

PCB TOLERANCE: ± 0.05 (TOP VIEW)

No. of	DIM. A	DIM. B	No. of	DIM. A	DIM. B
6	2.54	3.81	26	15.24	16.51
8	3.81	5.08	30	17.78	19.05
10	5.08	6.35	34	20.32	21.59
12	6.35	7.62	40	24.13	25.40
14	7.62	8.89	44	26.67	27.94
16	8.89	10.16	50	30.48	31.75
20	11.43	12.70	60	36.83	38.10
24	13.97	15.24			

SPECIFICATIONS

Current Rating: 1.0 Amps

Withstanding Voltage: AC 500V

Insulation Resistance: 1000M Ω MinContact Resistance: 20m Ω Max

Operation Temperature: -40° to +105°

Insulator Material: Polyester (UL94V-0)

Contact Material: Brass

Standard: PA6T

Contact Plating: Gold Flash

Max. Processing Temp: 240° C for 30-60 seconds
(260° C for 5 seconds)

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2^\circ$ X.X' $\pm 0.5^\circ$ 

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

CHECKED BY:

马跃

DATE:

2014-02-23

APPROVED BY:

邱敏

DATE:

2014-02-23

PART NAME: 1.27PH 2XN Pin H5.7

SMT 带柱筒牛 PC6.3 PB6.1 L7.7

PART NO.

HYC32-JNS127-2XN

MOLD NO.

DRAW NO:

HYC-2609011146

SHEET NO.

1 OF 1