
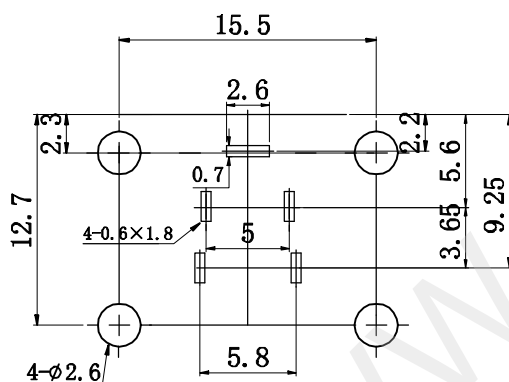

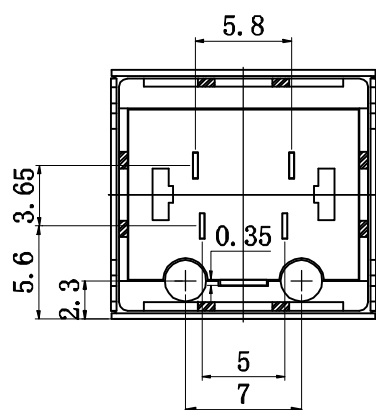


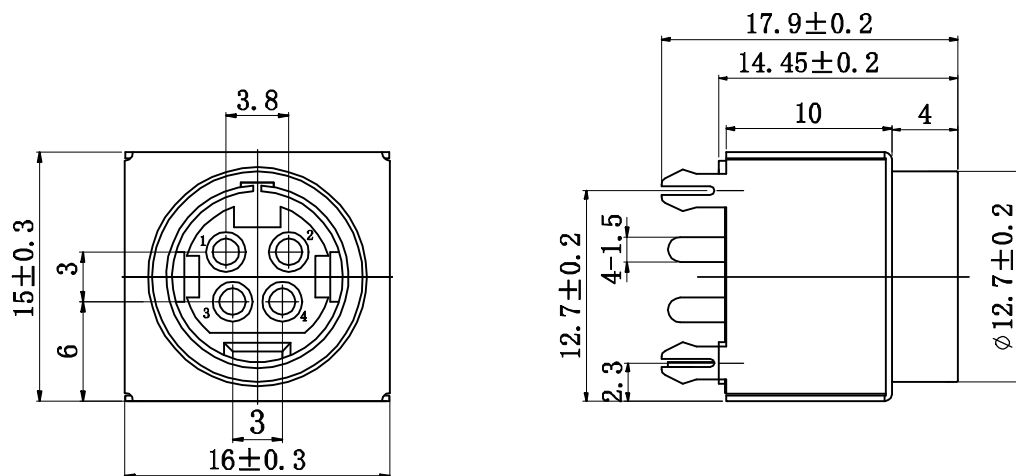

PCB板安装孔图

主要技术特性要求:

1. 使用温度范围:

环境温度: -25~+70℃

相对湿度: 95%(40℃)

2. 额定负荷: 6.5A 20V DC

3. 接触电阻: ≤30mΩ

4. 绝缘电阻: ≥100MΩ

5. 耐压: 250V AC (50Hz) 1min

6. 插拔力: 10~60N

7. 寿命: ≥5000次

6	包圆	1	黄铜0.35mm	D. Cu/Sn			
5	铜壳	1	黄铜0.35mm	D. Cu/Sn			
4	左长针	2	黄铜0.28mm	D. Cu/Sn			
3	右长针	2	黄铜0.28mm	D. Cu/Sn			
2	后盖	1	PBT				
1	底座	1	PBT				
序号	名称	数量	材料	处理	单件质量	总计质量	备注



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MPC 端子	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-MPC-405-1
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2609021434
SCALE:1:1	SIZE: A4		SHEET NO.	1 OF 1