
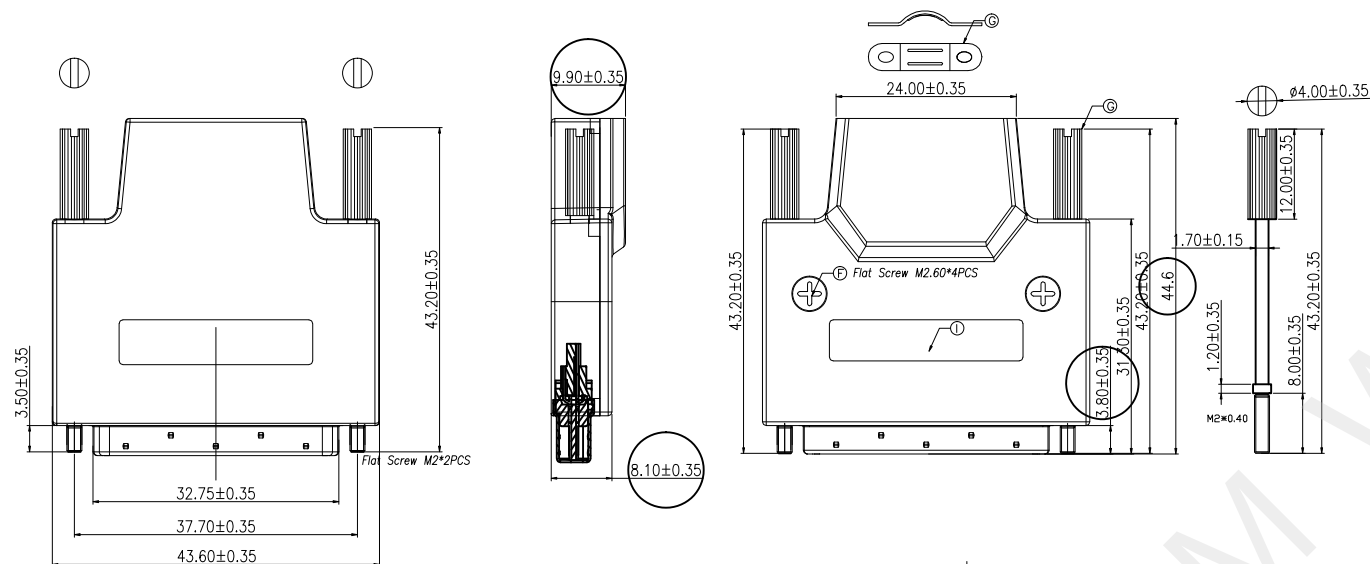

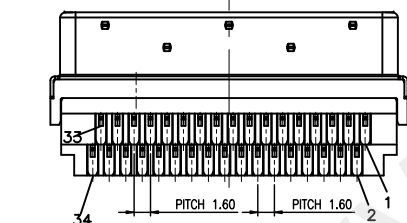

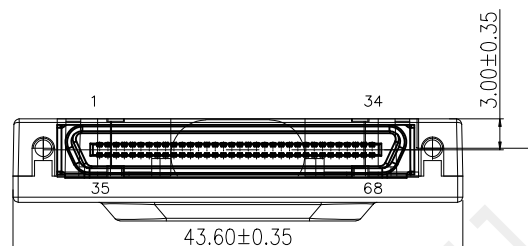


SPECIFICATIONS:

- 1.VOLTAGE RATING :30V AC(rms)
- 2.CURRENT RATING : 2 A/CONTACT
- 3.DIELETRIC WITHSTANDING VOLTAGE
250V AC(RMS) FOR ONE MINUTE.
- 4.INSULATION RESISTANCE:500 MEGOHMS.
- 5.CONTACT RESISTANCE:50m ohms

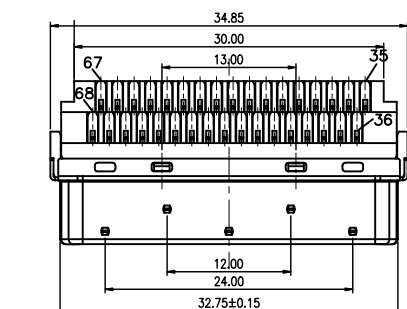


SECTION:A-A

I	SHIELD	2	zinc alloy	Ni 80u"Min
H	CABLE CLIPPER	1	SPCC T=0.80mm	Ni 80u"Min
G	FLAT SOREW	2	SPCC	Ni 80u"Min
F	FLAT SOREW	4	SPCC	Ni 80u"Min
E	LONG CONTACT	34	C2680-EH T=0.30mm	AL30U" ON CONTACT AREA, 100U"MIN PLATING ON SOLDER TAILS, 80U"ALL OVER NICKEL PLATING.
D	SHORT CONTACT	34		
C	SHELL	1	SPCC T=0.30mm	Ni 80u"Min
B	COVER	1	LCP+15%GF UL94-V0	BLACK
A	INSULATOR	1	PBT+30%GF UL94-V0	BLACK
NO.	MATERIAL	QTY	MATERIAL	PLATING & COLOR



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME: VHDCI 68PIN公座	
X.X ±0.30		陈一鸣	2014-02-23	超薄焊线配锌合金外壳超薄型	
X.XX ±0.25					
X.XXX ±0.15					
X: ±2° X.X ±0.5°		CHECKED BY:	DATE :	PART NO.	HYC113-SCSI68-348
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]				APPROVED BY:	DATE :
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	1 OF 1