

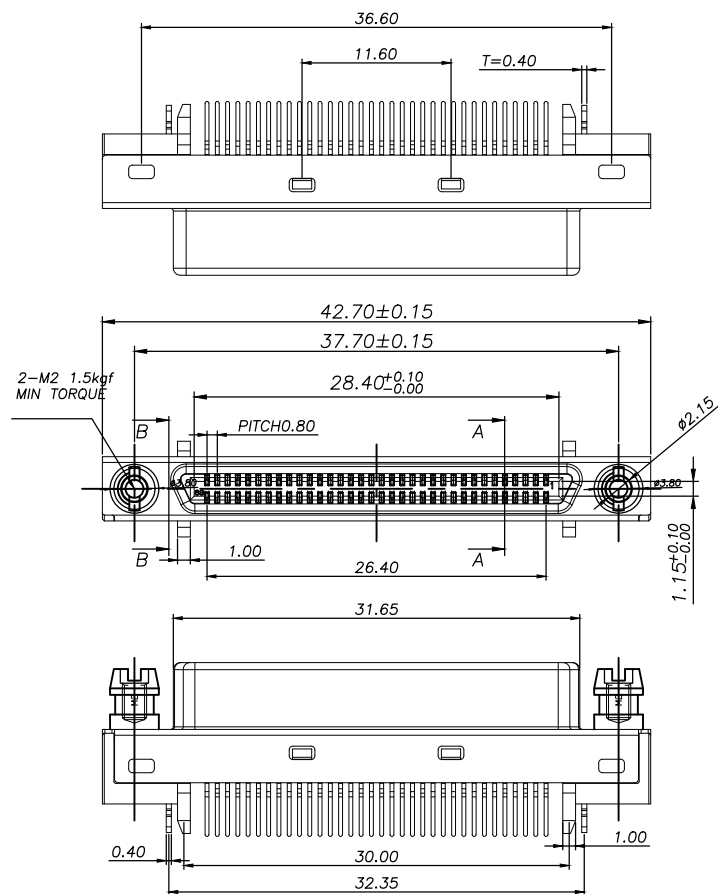


SECTION:A-A

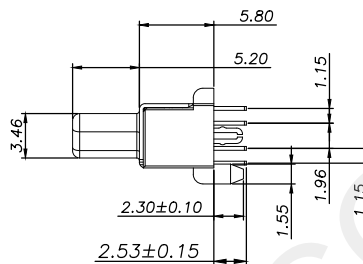

SECTION:B-B

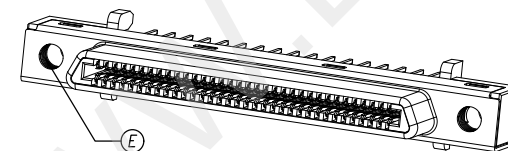

NOTE:

1.MATERIALS:

1. HOUSING: THERMOPLASTIC, UL 94V-0 RATED.
2. COVER: THERMOPLASTIC, UL 94V-0 RATED.
3. CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATED
4. SHELL: SPCC, NICKEL PLATED.
5. HARPOON: COPPER ALLOY, TIN OVER NICKEL

2.SPECIFICATION:

1. RATED CURRENT: 0.30A/CONTACT
2. INSULATION RESISTANCE: 500MOHM MIN.
3. DIELECTRIC WITHSTANDING VOLTAGE:250V AC FOR 1 MINUTE.
4. OPERATING TEMPERATURE: -25°C TO +85°C

3.ROHS COMPLIANT.

F	HOLD DOWNS	2PCS	H65	NICKEL 60u"MIN
E	HOLD DOWNS	2 PCS	SPCC	NICKEL 60u"MIN
D	LOCK SCREWS	2 PCS	H65	NICKEL 60u"MIN
C	TERMINAL	68 PCS	C2680 T0.30	GOLD FLASH PLATING ON CONTACT AREA TIN PLATING ON SOLDER AREA,
B	SHELL	1 PCS	SPCC T0.30	NICKEL 60u"MIN
A	HOUSING	1 PCS	LCP 30%GF	UL94-V0 BLACK
NO.	DESCRIPTION	Q,TY	MATERIAL	PLATING & COLOR



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X' ±2" X.X" ±0.5"



UNIT: mm [inch]

SCALE:1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

VHDCI 68PIN母座 180度插板锁螺母

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC112-SCSI68-427

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2608170904

SHEET NO.

1 OF 1