
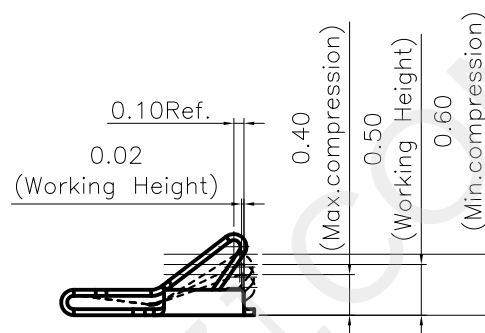
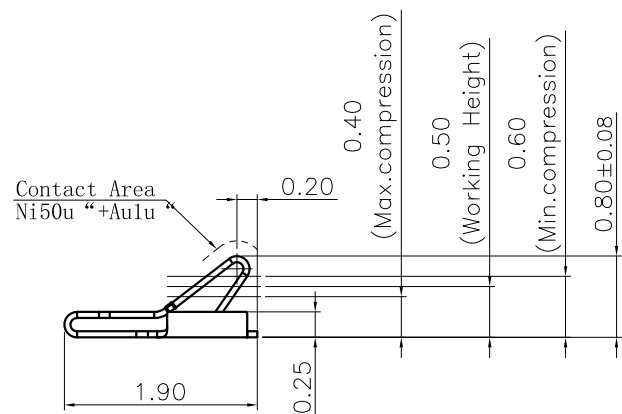
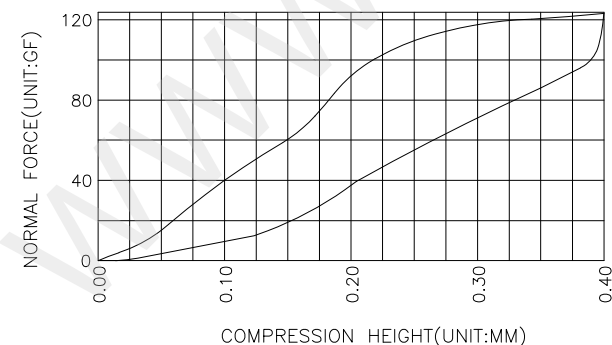
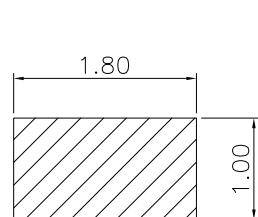
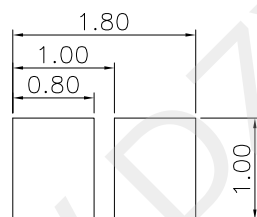


3D VIEW




STATED AT COMPRESSION
(FOR REFERENCE ONLY)RECOMMENDED PCB LAYOUT
TOLERANCE±0.05(焊盘推荐图)
(FOR REFERENCE ONLY)METAL MASK T=0.08
TOLERANCE±0.05(钢网推荐图)
(FOR REFERENCE ONLY)

- NOTES:
- 1:MATERIAL:
1-1:STAINLESS STEEL THICKNE=0.06mm
 - 2:FINISH:
2-1:1u"min Au PLATING ON CONTACT AREA,
1u"min Au PLATING ON SOLDER AREA,
50u"min NICKEL PLATING ON BASE AREA.
 - 3:PRODUCT SPECIFICATIONS:
3-1:RATED CURRENT:1.0A/MAX
3-2:VOLTAGE RATING:1.50V/AC/DC/MAX
3-3:CONTACT RESISTANCE:80mΩ/MAX
3-4:OPERATING TEMPERATURE:-40°C~85°C
3-5:FORCE OF 0.50MM:0.50N MIN ON CONTACT POINT.
3-6:MAX.BEAM DEFLECTION:0.40mm ON CONTACT POINT.
3-7:DURABILITY:1,500 CYCLES.
 - 4:SALT SPRAY:12 HOURS
 - 5:PACKING SPECIFICATION:REEL&TARE
 - 6:DIMENSIONS MARKED ◻,CPK>1.33
 - 7:ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC;
 - 8:COMPLIANT TO RoHS&LEAD FREE



深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 天线弹片 L1. 90*W1.00*H0.80	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-TXT191008	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2609031646	
			SHEET NO. 1 OF 1	

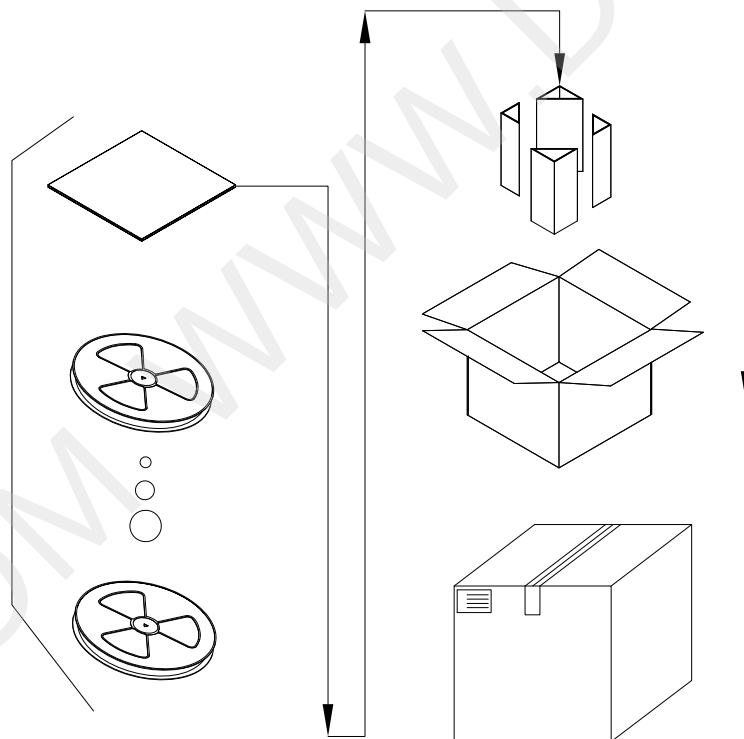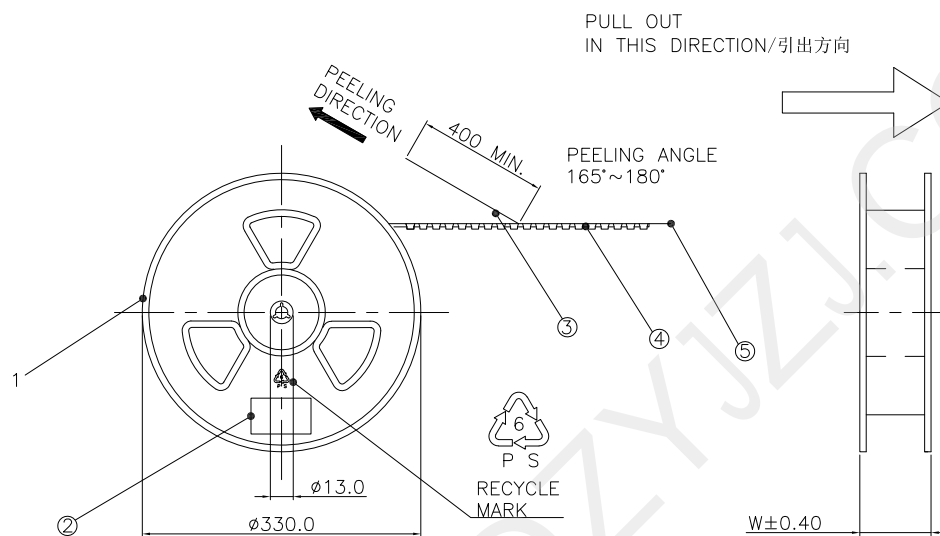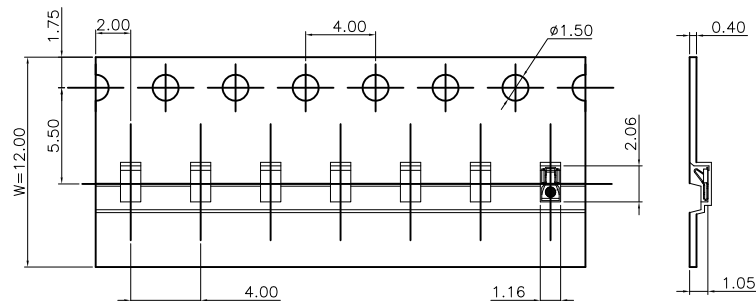

⑤		ADHESIVE TAPE	
④		CARRIER TAPE	W12.0
③		TOP COVER	W9.30
②	1	LABLE	
①	1	ROLLER DISK	ø330
ITEM	QT'Y	NAME	SIZE



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.* ±0.5*		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
 UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
		APPROVED BY:	DATE :	MOLD NO.	
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	DRAW NO:	
				SHEET NO.	1 OF 1