


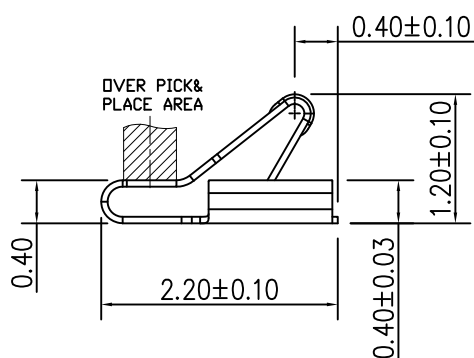
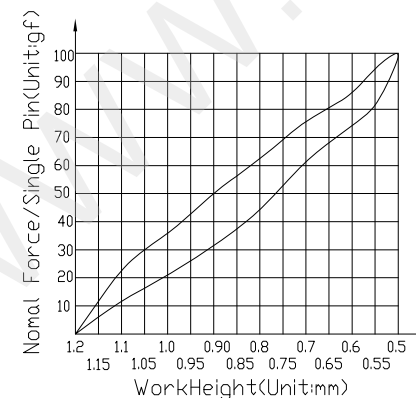


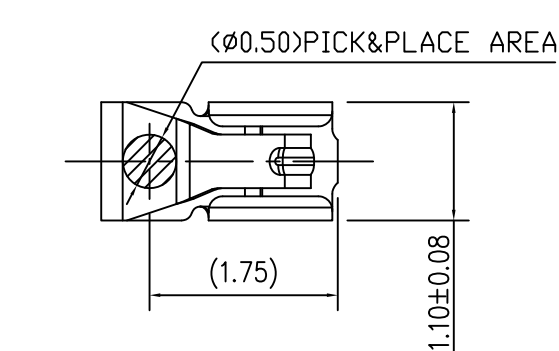


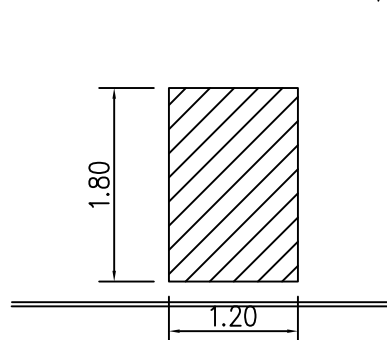

(0.19)Min.compression
(0.17)Working height
(0.14)Max.compression

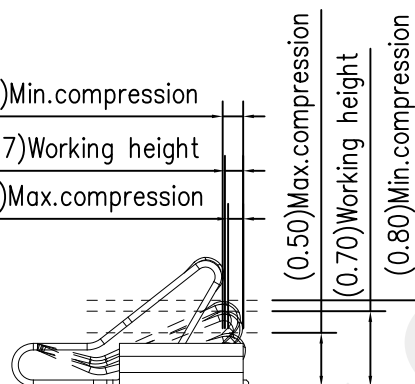

RECOMMENDED PCB LAYOUT
TOLERANCE±0.05 (焊盘推荐图)
(FOR REFERENCE ONLY)

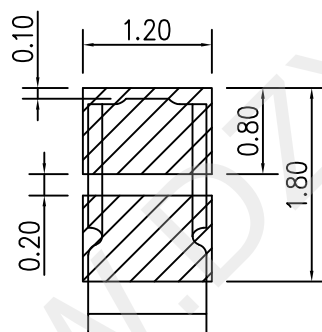

METAL MASK T=0.10
TOLERANCE±0.05 (钢网推荐图)
(FOR REFERENCE ONLY)

NOTES:

(1) MATERIAL:

1-1: STAINLESS STEEL THICKNE=0.06mm

(2) FINISH:

2-1: 3u"min Au PLATING ON CONTACT AREA,
G&F" Au PLATING ON SOLDER AREA,
50~150u" NICKEL UNDER PLATING OVER ALL.

2-2: DIMENSIONS OF PCB PAD STENCIL ARE FOR REFERENCE ONLY,
CUSTOMER CAN MODIFY IT BY THEIR OWN.

(3) PRODUCT SPECIFICATIONS:

3-1: RATED CURRENT: 1.0A/MAX
3-2: VOLTAGE RATING: 1.50V/AC/DC/MAX
3-3: CONTACT RESISTANCE: 50mΩ/MAX
3-4: OPERATING TEMPERATURE: -40°C~85°C
3-5: NORMAL FORCE: 0.50~1.00N ON WORKING
3-6: DURABILITY: 1,500 CYCLES,

(4): SALT SPRAY: 24 HOURS

(5): PACKING SPECIFICATION: REEL & TARE

(6): DIMENSIONS MARKED , CPK > 1.33

(7): ALL DIMENSIONS MARKED MUST BE CONTROLLED BY QC;

(8): COMPLIANT TO RoHS & LEAD FREE






深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 天线弹片 L2. 20*W1. 10*H1. 20
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-TXT221112A
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2609031201
			SHEET NO. 1 OF 1



CONN. QTY./REEL	REEL QTY./CARTON	CONN. QTY./CARTON
10,000	20	200,000

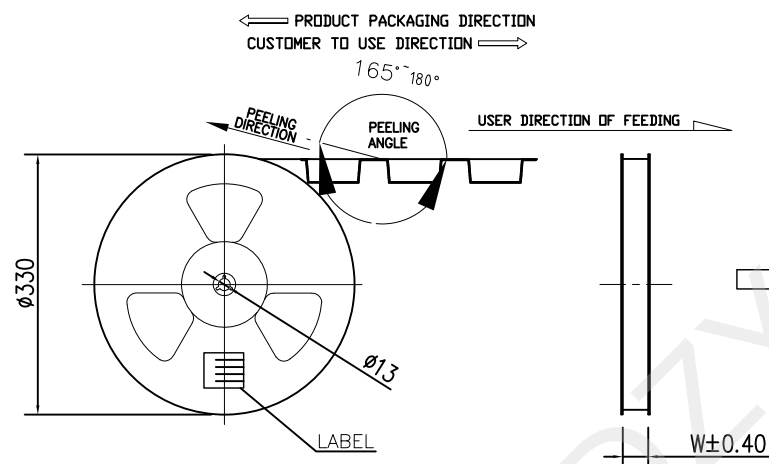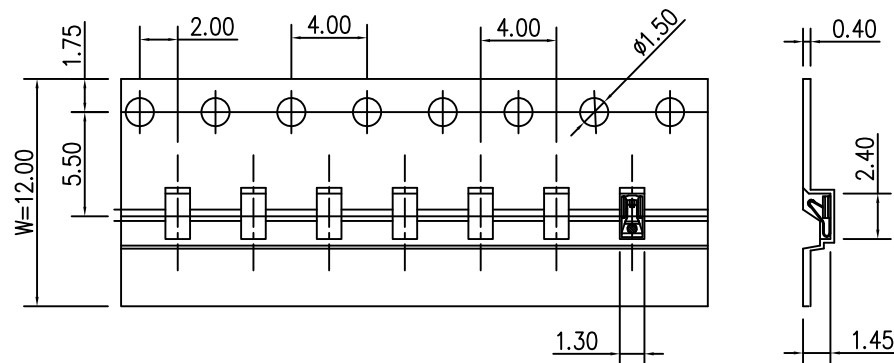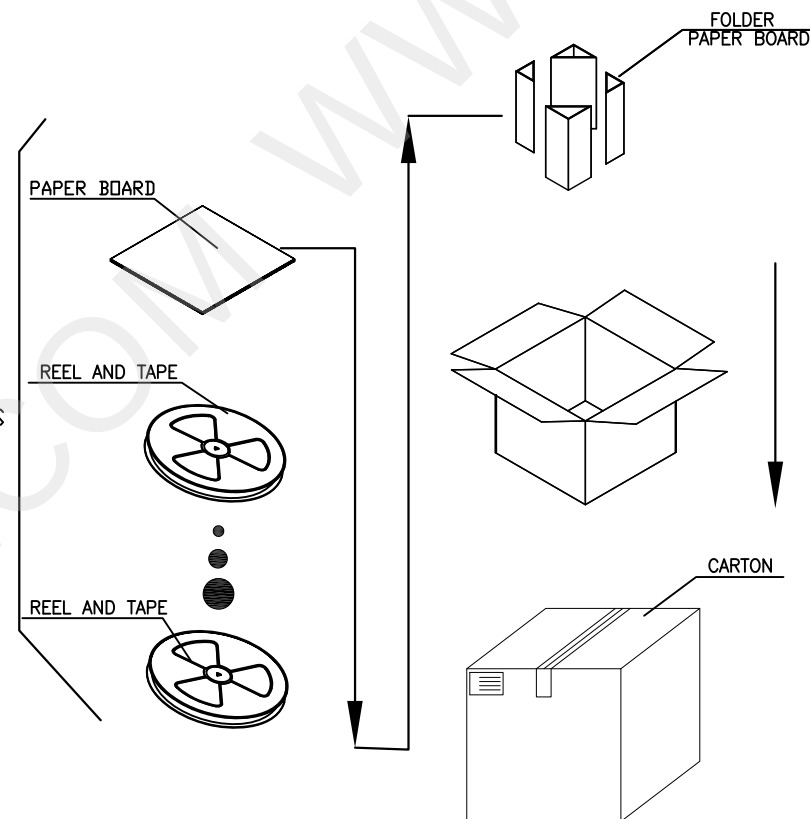TOTAL
20LAYERS

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1