


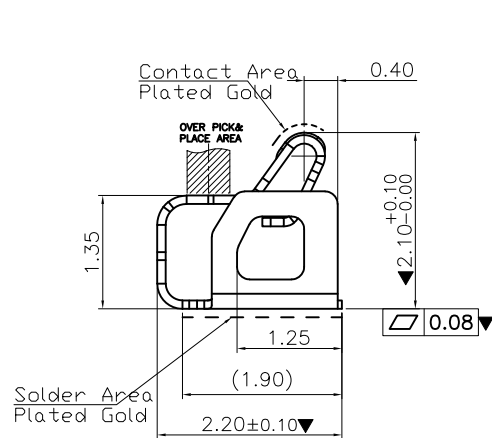







以焊接面为基准, 0.56mm 两侧最高点归零后量测凸包高度



0.30 (Min.compression)
0.39 (Working height)
0.41 (Max.compression)

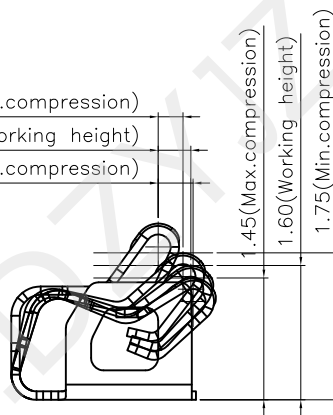

STATED AT COMPRESSION
(FOR REFERENCE ONLY)

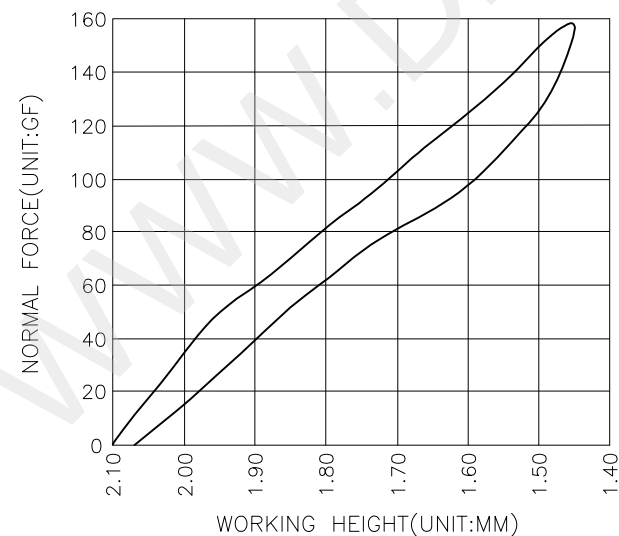

NOTES:

1:MATERIAL:

1-1:STAINLESS STEEL THICKNE=0.10mm

2:FINISH:

2-1:4u"min Au PLATING ON CONTACT AREA,

1u"min Au PLATING ON SOLDER AREA,

50-150u" NICKEL PLATING ON BASE AREA.

3:PRODUCT SPECIFICATIONS:

3-1:RATED CURRENT:2.0A/MAX

3-2:VOLTAGE RATING:10.0V/AC/DC/MAX

3-3:CONTACT RESISTANCE:30mΩ/MAX.AFTER DURABILITY

AND ENVIRONMENT:ΔR=20mΩ/MAX

3-4:OPERATING TEMPERATURE:-40°C~85°C

3-5:FORCE MAX.DEFLECTION:0.70N MIN ON CONTACT POINT.

3-6:DURABILITY:1,500 CYCLES.

4:SALT SPRAY:24 HOURS

5:PACKING SPECIFICATION:REEL&TARE


6:DIMENSIONS MARKED ◻,CPK>1.33

7:ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC;

8:COMPLIANT TO RoHS&LEAD FREE

RECOMMENDED PCB LAYOUT

TOLERANCE±0.05(焊盘推荐图)
(FOR REFERENCE ONLY)



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5'

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

L2. 20*W1. 20*H2. 10

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HVC-TXT221221A

MOLD NO.

DRAW NO:

HVC-2609031541

SHEET NO.

1 OF 1

APPROVED BY:

邱敏

DATE :

2014-02-23

