


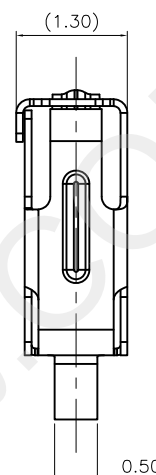
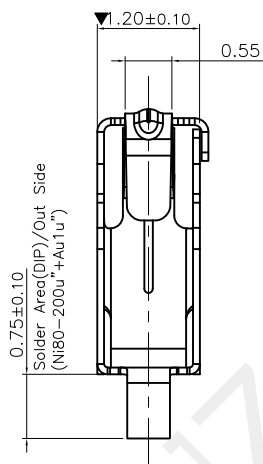


3D VIEW

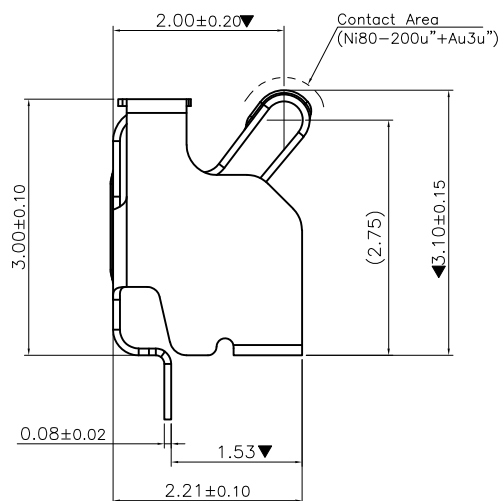

RECOMMENDED PCB LAYOUT
TOLERANCE±0.05(焊盘推荐图)
(FOR REFERENCE ONLY)




RECOMMENDED METAL MASK
TOLERANCE±0.08(钢网推荐图)
(FOR REFERENCE ONLY)

- NOTES:
1:MATERIAL:
1-1:COPPER ALLOY THICKNE=0.08mm
2:FINISH:
2-1:3u"min Au PLATING ON CONTACT AREA,
1u"min Au PLATING ON SOLDER AREA,
80-200u" NICKEL PLATING ON BASE AREA.
3:PRODUCT SPECIFICATIONS:
3-1:RATED CURRENT:2.0A/MAX
3-2:VOLTAGE RATING:5.0V/AC/DC/MAX
3-3:CONTACT RESISTANCE:50mΩ/MAX
3-4:WELDING THRUST:≧1.5KG
3-5:OPERATING TEMPERATURE:-40°C~85°C
3-6:NORMAL FORCE OF PRESS@2.40:30±10gf
3-7:DURABILITY:10,000 CYCLES.YIELD NO EXCEED 0.10MM.
4:SALT SPRAY:24 HOURS
5:PACKING SPECIFICATION:REEL&TARE
6:DIMENSIONS MARKED □,CPK>1.33
7:ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC;
8:COMPLIANT TO RoHS&LEAD FREE




深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: L2. 21*W1.30*H3.10 充电弹片	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC-TXT2211331TA	
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2609040922	
			SHEET NO. 1 OF 1	

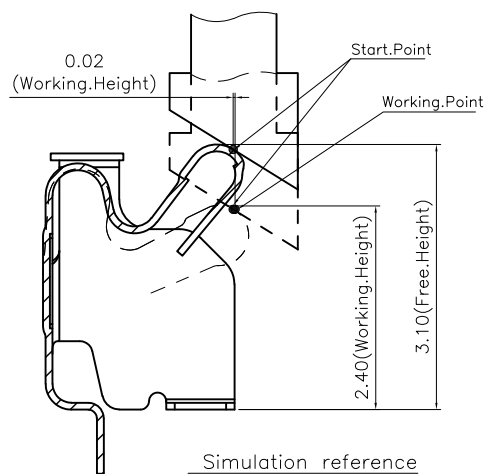

Normal Force@2.40 Compression is 30 ± 10 gf After Plating
Normal Force@2.40 Compression is 24 ± 10 gf Before Plating

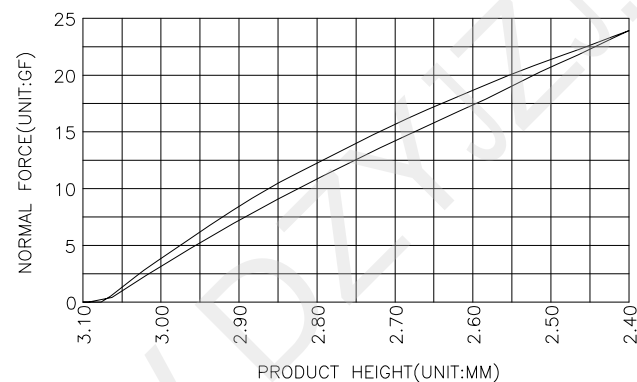

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: L2. 21*W1.30*H3.10 充电弹片	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC-TXT2211331TA	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2609040922	SHEET NO. 1 OF 1