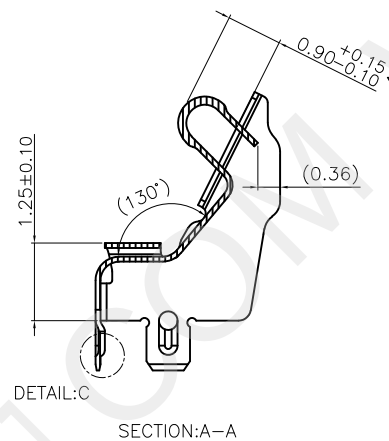
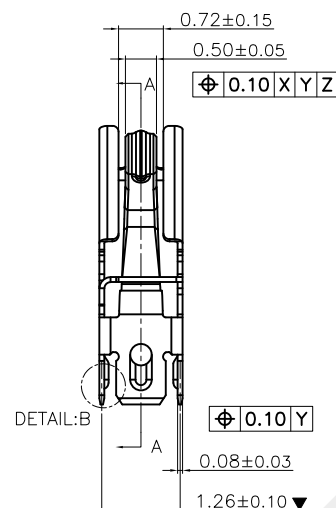
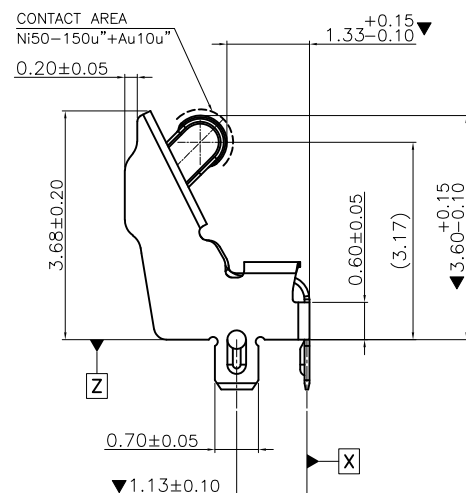






3D VIEW

NOTES:

1) MATERIAL:

1-1: STAINLESS STEEL THICKNESS=0.08±0.03mm

2) FINISH:

2-1: 10u\"/>

3) PRODUCT SPECIFICATIONS:


3-1: RATED CURRENT: 1.5A/MAX
3-2: VOLTAGE RATING: 5.0V/AC/DC/MAX
3-3: CONTACT RESISTANCE: 50mΩ/MAX
3-4: DURABILITY: 10,000 CYCLES.

4) SALT SPRAY: 24 HOURS (JUDGED BY ALL OUTSIDE AREA)

5) DIMENSIONS MARKED ■, CPK>1.33

6) ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC;

7) COMPLIANT TO RoHS&LEAD FREE

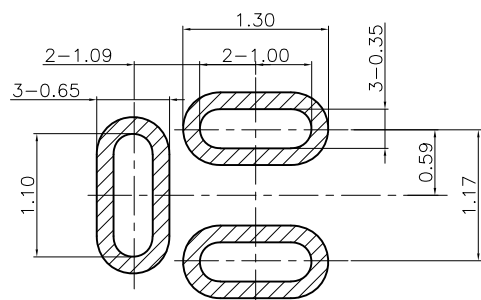


RECOMMENDED PCB LAYOUT
TOLERANCE±0.05(焊盘推荐图)
(FOR REFERENCE ONLY)




深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: L2. 97*W1.34*H3.60mm 立式充电弹片
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-TXT29713436TA
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HYC-2609031139
			SHEET NO. 1 OF 1

耳机插入示意图

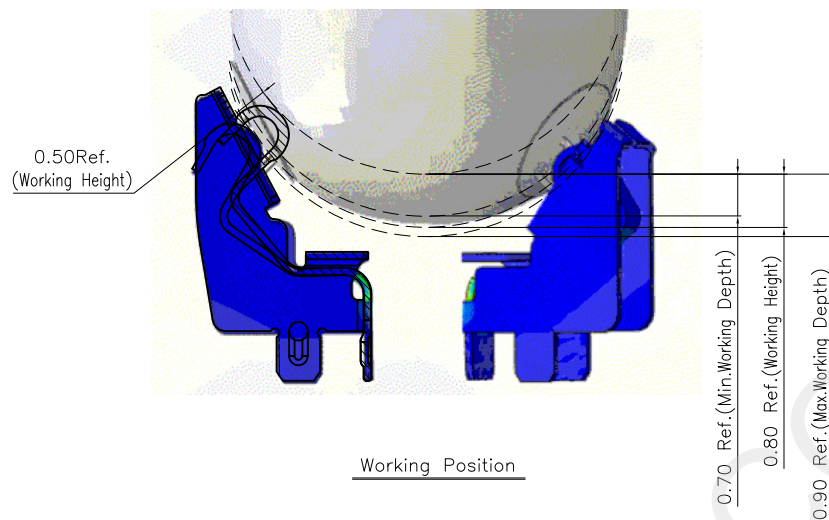


耳机插入力曲线图

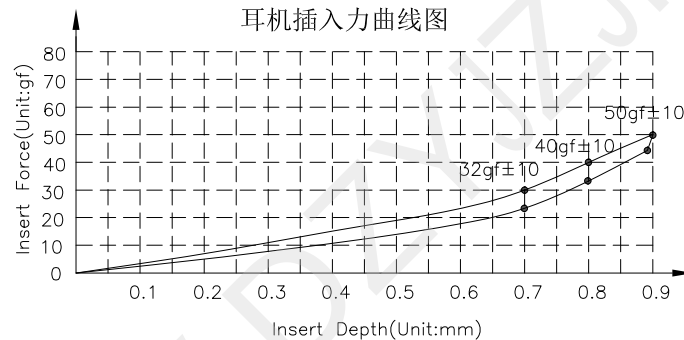


深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5' UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: L2. 97*W1.34*H3.60mm立式充电弹片
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC-TXT29713436TA
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2609031139
			SHEET NO. 1 OF 1

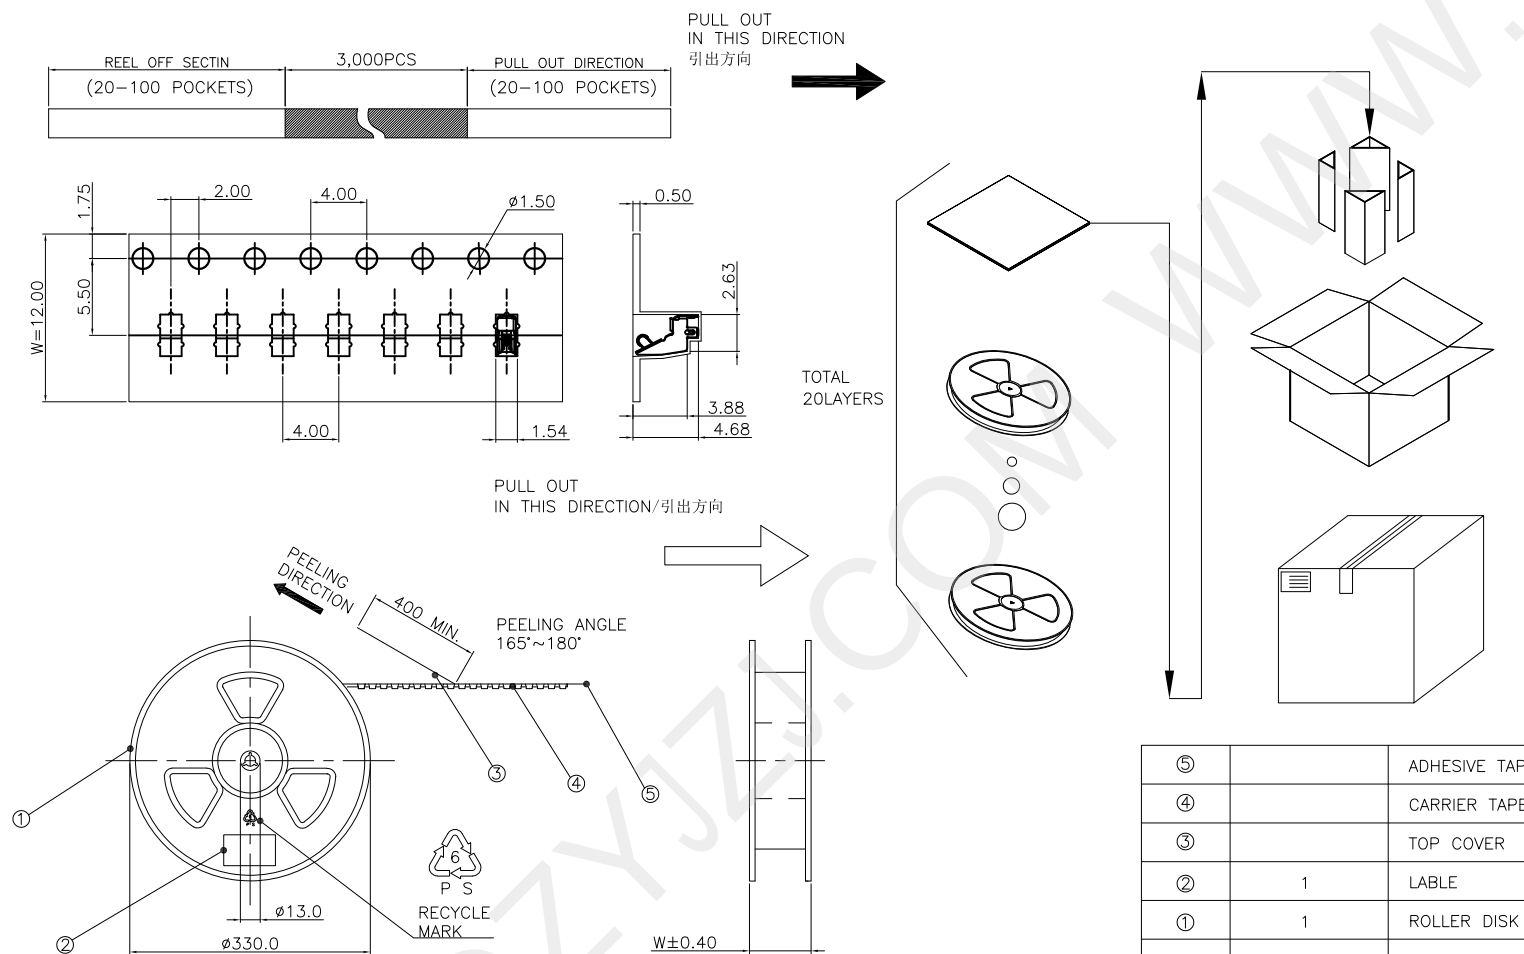

⑤		ADHESIVE TAPE	
④		CARRIER TAPE	W12.0
③		TOP COVER	W9.30
②	1	LABLE	
①	1	ROLLER DISK	ø330
ITEM	QT'Y	NAME	SIZE

 深圳市华宇创精密电子有限公司				
TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X* $\pm 2^{\circ}$ X.X* $\pm 0.5^{\circ}$		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图
 UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
SCALE: 1:1	SIZE: A4		DRAW NO:	
			SHEET NO.	1 OF 1