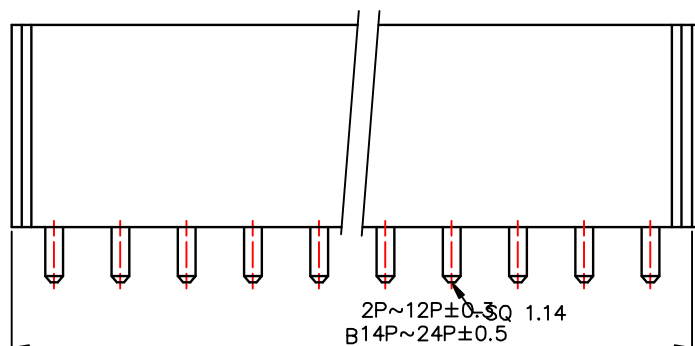
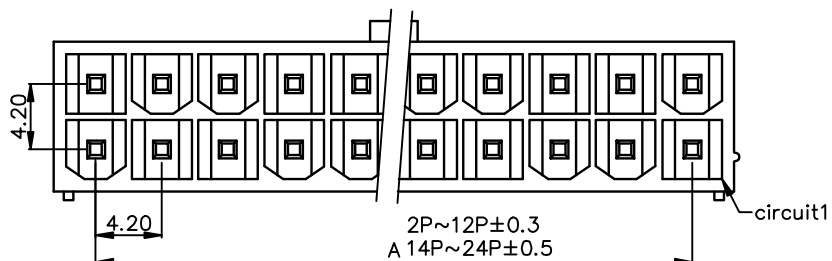


Dimensions

circuit	A	B	circuit	A	B
2*1	- -	5.40	2*7	25.20	30.60
2*2	4.20	9.60	2*8	29.40	34.80
2*3	8.40	13.80	2*9	33.60	39.00
2*4	12.60	18.00	2*10	37.80	43.20
2*5	16.80	22.20	2*11	42.00	47.40
2*6	21.00	26.40	2*12	46.20	51.60

WAFER(180°)

Material: pin: Brass tin-plated

Base: Nylon66 UL94V-2

Circuits: 2-24circuits available

Insulation resistance: 1000MΩ min

Withstand Voltage: 1500V AC/minute

Current Rating: 9A AC/DC

Voltage Rating: 600V AC/DC



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2° X.X' ±0.5°

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

MX4.2 双排直针 实心PIN

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC300-2XNA-420

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2609011530

SHEET NO.

1 OF 1