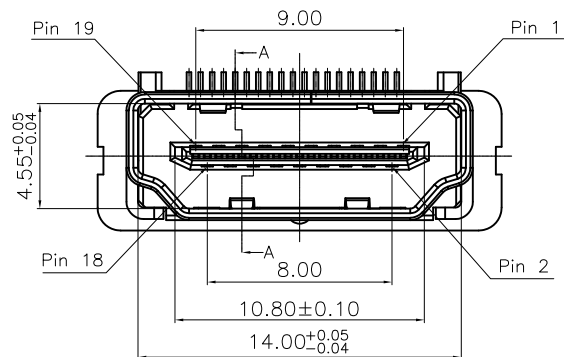
**1.MATERIAL:**

- 1.1 INSULATOR: LCP, UL94V-0, COLOR: BLACK.
- 1.2 CAP: LCP, UL94V-0, COLOR: BLACK.
- 1.3 CONTACT: BRASS.
- 1.4 SHELL: BRASS.

2.FINISH:





- 2.1 CONTACT: 15u" Min. GOLD IN CONTACT AREA, GOLD FLASH IN SOLDER AREA, 30u" Min. NICKEL UNDERPLATED OVERALL.
- 2.2 SHELL: 30u" Min. NICKEL PLATED OVERALL.

3.SPECIFICATION:

- 3.1 CURRENT RATING: 0.5AMPS.
- 3.2 VOLTAGE RATING: 40VAC.
- 3.3 CONTACT RESISTANCE: 10 mΩ MAX. (EXCLUDING CONDUCTOR RESISTANCE)
- 3.4 INSULATION RESISTANCE: 100MΩ MIN.
- 3.5 DIELECTRIC WITHSTANDING VOLTAGE: 500 V AC/60sec
- 3.6 INSERTION FORCE: 4.5KgF MAX.
- 3.7 WITHDRAWAL FORCE: 1.0KGF~4.0KGF
- 3.8 DURABILITY: 10000 CYCLE.
- 3.9 TEMPERATURE OPERATING: -25°C TO +85°C.

4.NOTES:

- 4.1 ALL COMPONENTS ARE RoHS2.0 & REACH & HALOGEN FREE COMPLIANT.
- 4.2 RESISTANCE TO SOLDERING HEAT: 265°C FOR 10 SECONDS.

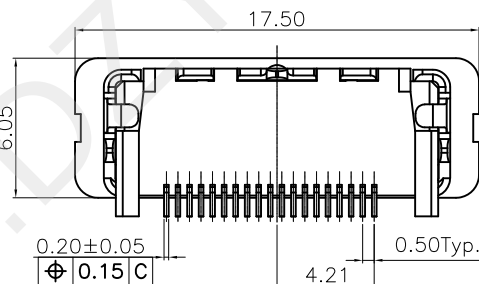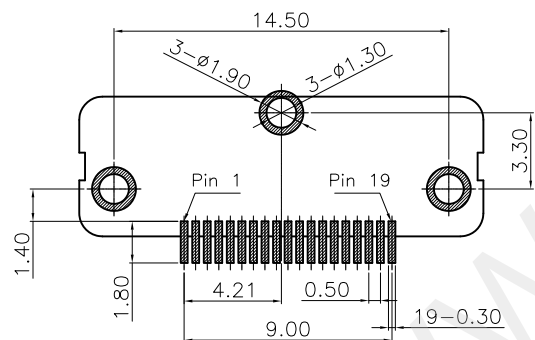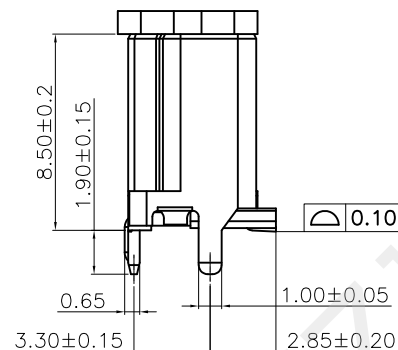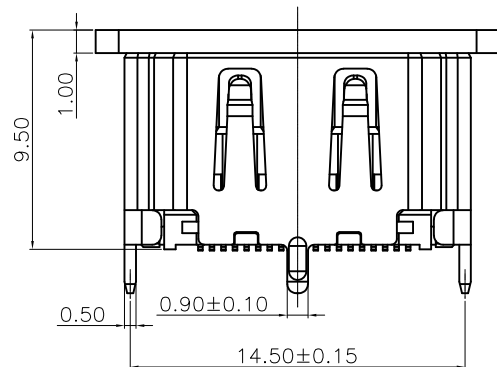


RECOMMENDED P.C.B LAYOUT(PCB THICKNESS: 1.6mm)
COMPONENT TOP VIEW(TOLERANCE: ±0.05)



深圳市华宇创精密电子有限公司

TOLERANCE:

x.x ±0.30
x.xx ±0.25
x.xxx ±0.15
x' ±2" x.x' ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

HDMI A TYPE 立式贴片8.5H

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC181-HDMI A19-085

MOLD NO.**APPROVED BY:**

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2609081005

SHEET NO.

1 OF 1