

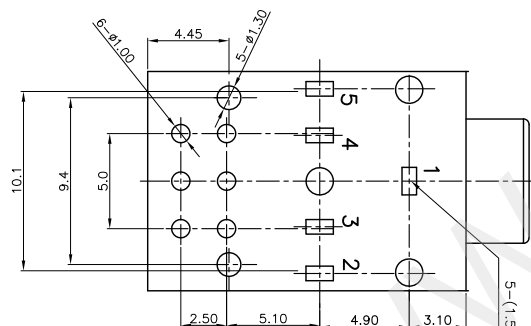
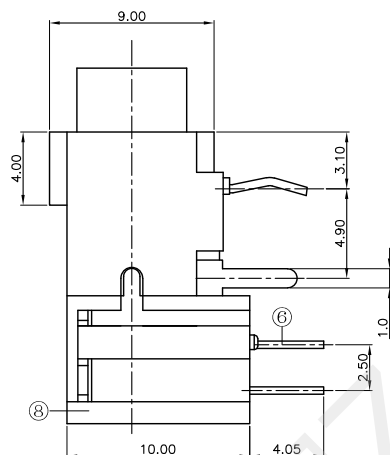
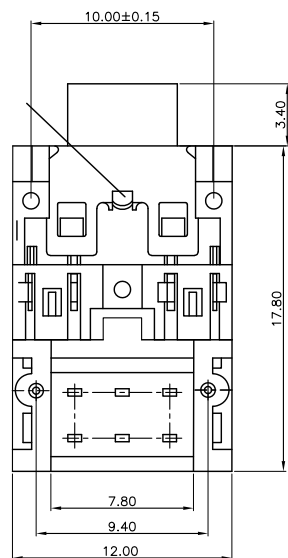


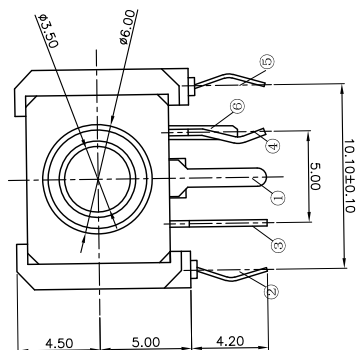

线路板开孔图



电路原理图

技术要求

1. 额定值: DC 30V 0.5A;
2. 接触电阻: $\leq 30\text{m}\Omega$;
3. 绝缘电阻: $\geq 100\text{M}\Omega$;
4. 耐压: AC500V (50Hz) 1min;
5. 插拔力: 3-30N;
6. 使用温度范围: $-30\sim 70^\circ\text{C}$;
7. 使用寿命: 5000次;

8	盖子	PJ-306-07	PA66		1	黑
7	底座	PJ-306-07	PA66		1	黑
6	6号弹片	PJ-306-06	黄铜 H62 $t=0.3$	镀银	1	
7	5号弹片	PJ-306-05	磷铜 C5191 $t=0.3$	镀银	1	
6	4号弹片	PJ-306-04	黄铜 H62 $t=0.4$	镀银	1	
5	3号弹片	PJ-306-03	黄铜 H62 $t=0.4$	镀银	1	
2	2号弹片	PJ-306-02	磷铜 C5191 $t=0.3$	镀银	1	
1	1号触片	PJ-306-01	黄铜 H62 $t=0.4$	镀银	1	
序号	零件名称	编 号	材 料	电 镀	数量	备注



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PJ-306-5P 铜头高位双排开关
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC-PJ3065P-212
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2609081153
			SHEET NO. 1 OF 1