
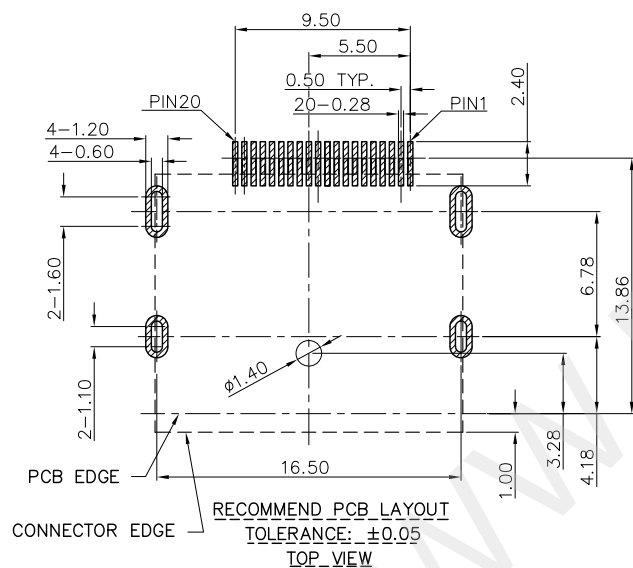
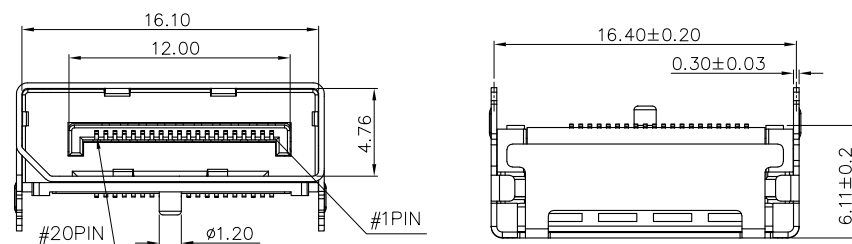



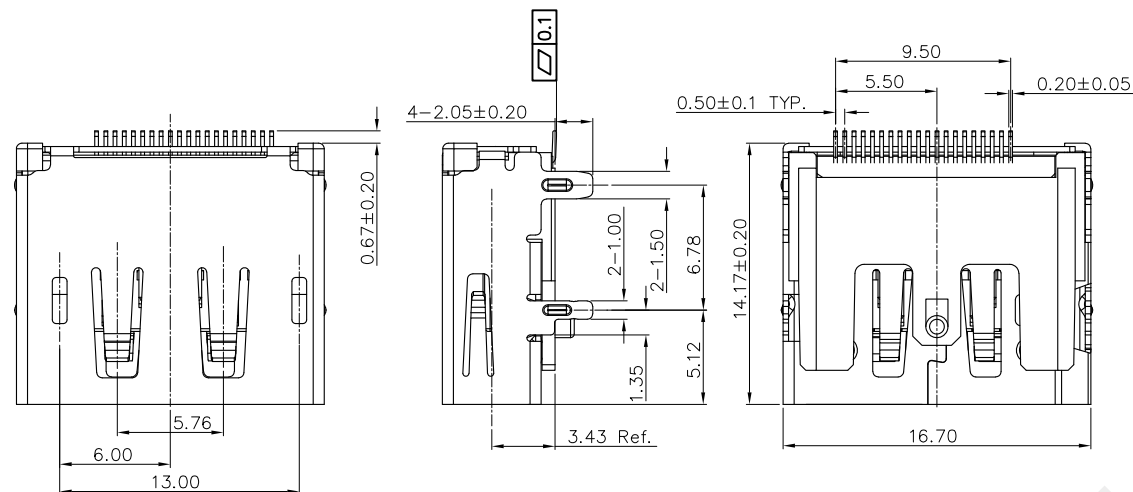

MATERIALS

1. HOUSING: LCP (UL94V-0), BLACK.
2. TERMINAL: COPPER ALLOY,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS.
NICKEL PLATED OVERALL.
3. SHELL: STAINLESS STEEL,
NICKEL PLATED OVERALL.


SPECIFICATION

1. CURRENT RATING: 0.5A. MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE: 100MΩ MIN.AT 500V DC.
4. CONTACT RESISTANCE: 30mΩ MAX.
5. OPERATING TEMPERATURE: -25°C TO +85°C.
6. DURABILITY: 10000 CYCLES.
7. MATING FORCE: 4.5kgf MAX.
8. UNMATING FORCE: 1.0kgf MIN.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: DP SMT 有弹带卡点 平口	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HXC61-DP20-167	MOLD NO.
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HXC-2609090905	SHEET NO. 1 OF 1

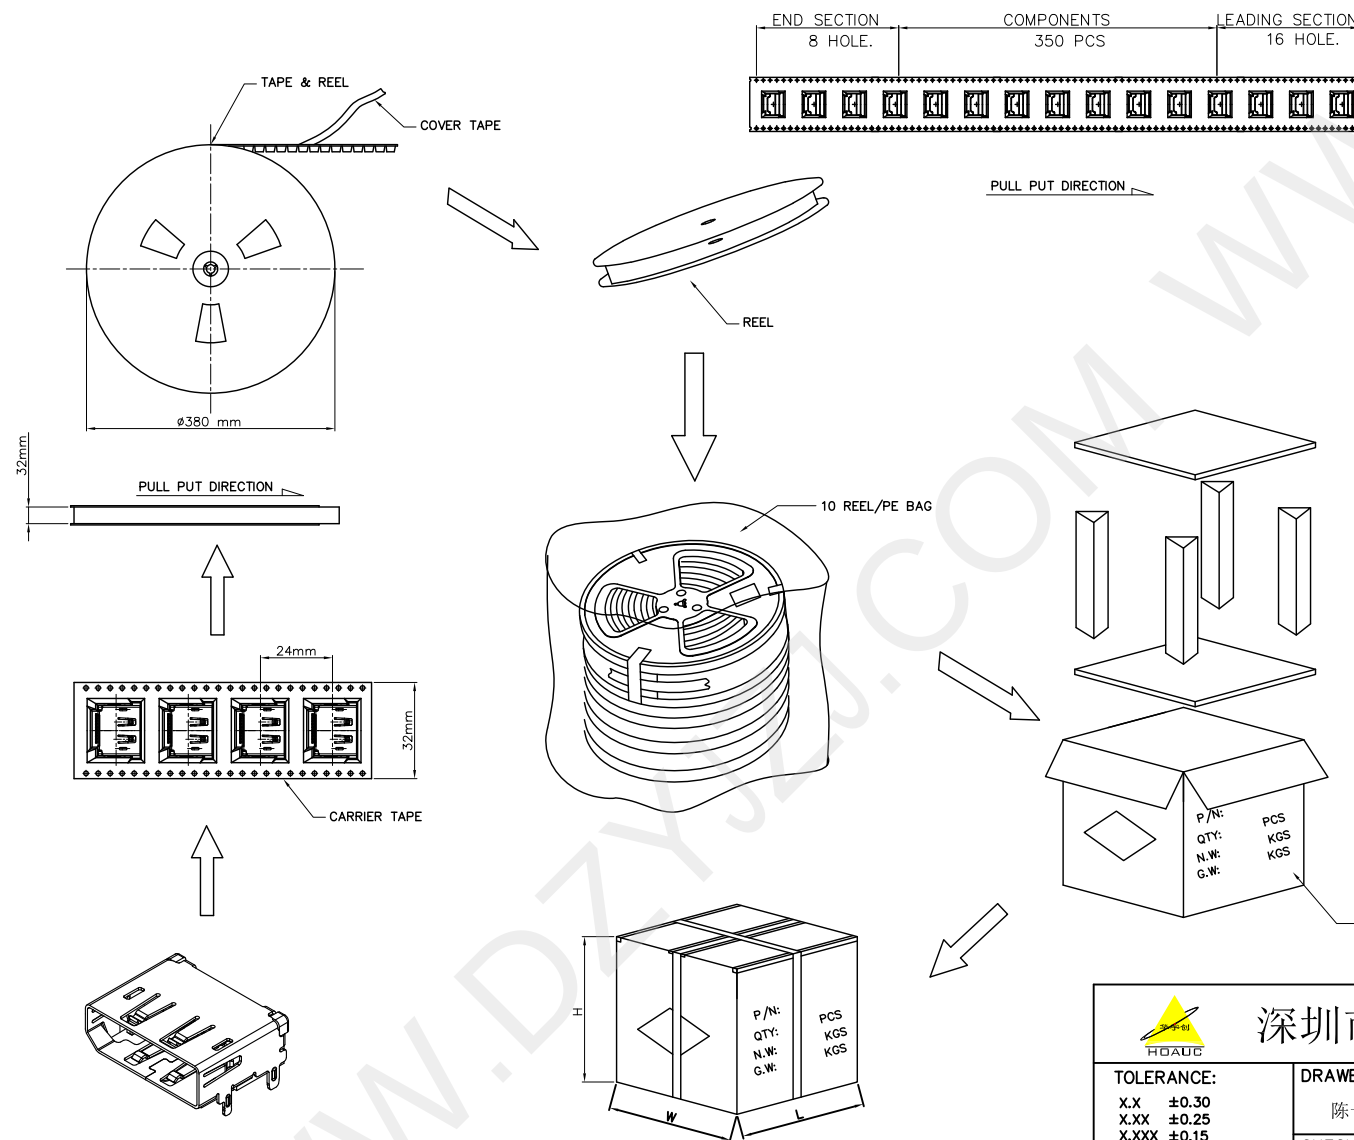

TAPE & PACKAGE :

MATERIAL :

1. CARRIER TAPE : PS
2. COVER TAPE: PE
3. REEL : PS

QUANTITY:

1. 350 PCS/REEL
2. 10 REEL/CARTON: 3500PCS

DIMENSION :

REEL SIZE :


DIA=380.0mm, W=32.0mm

CARTON :

L=400mm, W=400mm, H=400mm



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*				CHECKED BY: 马跃	DATE : 2014-02-23
 UNIT: mm [inch]		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	
SCALE: 1:1	SIZE: A4			SHEET NO.	1 OF 1